


Odin TeleSystems Inc.



Application Programming
Interface (API)
Reference Guide
for

THOR Windows 95 driver,
Rev 1.42

Doc. No. 1211-1-SDA-1003

Doc. Rev. 1.2 (Released)

December 5, 2000

Copyright

Copyright (C) Odin TeleSystems Inc. 1996, 1997. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written consent of Odin TeleSystems Inc., P. O. Box 59686, Dallas, Texas, 75229, U. S. A.

Trademarks

Odin TeleSystems, the Odin Logo, and Thor-2 are trademarks of Odin TeleSystems Inc., which may be registered in some jurisdictions. Other trademarks are the property of their respective companies.

Changes

The material in this document is for information only and is subject to change without notice. While reasonable efforts have been made in the preparation of this document to assure its accuracy, Odin TeleSystems Inc., assumes no liability resulting from errors or omissions in this document, or from the use of the information contained herein.

Odin TeleSystems Inc. reserves the right to make changes in the product design without reservation and notification to its users.

Warranties

THE SOFTWARE AND ITS DOCUMENTATION ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND. ODIN TELESYSTEMS EXPRESSLY DISCLAIMS ALL THE WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE. ODIN TELESYSTEMS DOES NOT WARRANT THAT THE FUNCTIONS CONTAINED IN THE SOFTWARE WILL MEET ANY REQUIREMENTS, OR THAT THE OPERATIONS OF THE SOFTWARE WILL BE UNINTERRUPTED OR ERROR-FREE, OR THAT DEFECTS WILL BE CORRECTED. FURTHERMORE, ODIN TELESYSTEMS DOES NOT WARRANT OR MAKE ANY REPRESENTATIONS REGARDING THE USE OR THE RESULTS OF THE SOFTWARE OR ITS DOCUMENTATION IN TERMS OF THEIR CORRECTNESS, ACCURACY, RELIABILITY, OR OTHERWISE. NO ORAL OR WRITTEN INFORMATION OR ADVISE GIVEN BY ODIN TELESYSTEMS OR ODIN TELESYSTEMS' AUTHORIZED REPRESENTATIVE SHALL CREATE A WARRANTY. SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OF IMPLIED WARRANTIES, SO THE ABOVE EXCLUSION MAY NOT APPLY.

UNDER NO CIRCUMSTANCE SHALL ODIN TELESYSTEMS INC., ITS OFFICERS, EMPLOYEES, OR AGENTS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES (INCLUDING DAMAGES FOR LOSS OF BUSINESS, PROFITS, BUSINESS INTERRUPTION, LOSS OF BUSINESS INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THE SOFTWARE AND ITS DOCUMENTATION, EVEN IF ODIN TELESYSTEMS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN NO EVENT WILL ODIN TELESYSTEMS' LIABILITY FOR ANY REASON EXCEED THE ACTUAL PRICE PAID FOR THE SOFTWARE AND ITS DOCUMENTATION. SOME JURISDICTIONS DO NOT ALLOW THE LIMITATION OR EXCLUSION OF LIABILITY FOR INCIDENTAL AND CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY.



Odin TeleSystems Inc.

This document is published by:

Odin TeleSystems Inc.

P. O. Box 59686

Dallas, Texas 75229

U. S. A.

Printed in U. S. A.



1.	Abstract	12
2.	Applicable Products	12
3.	Distribution	12
4.	Driver Overview	16
4.1	Application Programming Interface (API)	16
4.2	Files	19
4.3	Naming Conventions.....	21
4.3.1	Exception Handling	22
4.3.2	Standard Parameters	23
5.	Configuration using T2Config.exe or T2ConfigW.exe	24
6.	Low-Level API Function Calling Sequence Example.....	26
7.	System API Function Calling Sequence Example.....	30
8.	High-Level API Function Calling Sequence Example	34
9.	Thor Driver Example Applications.....	38
9.1	Low-Level API Application: LAPIAPP.EXE	38
9.2	System API Application: SAPIAPP.EXE	38
9.3	High-Level API Application: HAPIAPP.EXE.....	38
9.4	Application for Sending and Receiving Raw Data: DATAAPP.EXE	38
9.5	Application for Sending and Receiving Data Patterns: PATAPP.EXE	39
9.6	Demo of T1 Functions: T1APP.EXE	39
9.7	Demo of E1 Functions: E1APP.EXE	39
9.8	Demo of Phone Functions: PHONEAPP.EXE.....	39
9.9	Sending and Receiving of HDLC Frames on Multiple Pipes: PERFAPP.EXE	39
9.10	Checking the Status of the installed driver and boards: STATUSAPP.EXE.....	39
9.11	Demo of Thor-2's Audio functions: AUDIOAPP.EXE	39
9.12	Demo of Thor-2's SS#7 Support: SS7APP.EXE.....	40
10.	Common API Macro, Constant, and Type Definitions.....	42
10.1	Odin TeleSystems' Standard Definitions - otsdef.h.....	42
10.1.1	Standard Type Names	42
10.2	Thor Specific Definitions - thordef.h	43
10.2.1	Board Definitions	43
10.2.2	Highway Definitions.....	43
10.2.3	Internal Data Highways - ThorPhwType	44
10.2.4	Clock Source - ThorClkSrcType	44
10.2.5	CPU Interrupt Mask - THOR_CIM_XXX	45
10.2.6	LPU Interrupt Mask - THOR_LIM_XXX.....	45
10.2.7	Frame Header - ThorFrameHeader.....	46
10.2.8	Message Source - ThorSrcType	47
10.2.9	Frame Type - ThorFrameType	48
10.2.10	Frame End Codes.....	49
10.2.11	Frame Fill Type - ThorFrameFillType.....	49
10.2.12	Driver Parameters - ThorDriverT	50



10.2.13	Return Codes - ThorRc.....	51
10.2.14	Status Message - ThorStatusType.....	55
10.3	Driver Specific Definitions - drvdef.h	58
10.3.1	Board Configuration Data - ThorConfigT.....	58
10.3.2	Driver Mode - DrvModeT	58
10.4	Line Interface (LI) Specific Definitions - lidef.h.....	60
10.4.1	Operation Modes - LiMode	60
10.4.2	Alarm Type - LiAlarmType	60
10.4.3	Clock mode - LiClkMode	61
10.4.4	Bit Robbing Data - LiBrData.....	61
10.4.5	Li Configuration Options - LiConfigOptionsT	62
10.4.6	T1 Specific Configuration Options - LiT1ConfigOptionsT	62
10.4.7	E1 Specific Configuration Options - LiE1ConfigOptionsT	64
10.5	HDLC Specific definitions - hdlcdef.h	66
10.5.1	HDLC definitions	66
10.5.2	Pipe Configuration Options - HdlcPipeOpts	66
10.5.3	Memory Allocation for Channels - HdlcBufAllocT.....	69
10.5.4	Data Patterns to be sent with hdlcSendPattern() - HdlcDataPatternT	69
10.6	Flash Specific Defines - flashdef.h	71
10.6.1	Flash Addresses	71
10.6.2	Thor-2 Maintenance Data - MaintDataT	71
10.7	Codec Specific Definitions - cddef.h	73
10.7.1	Coding Law - CdLawT.....	73
10.7.2	Code Assignment - CdCodeT.....	73
10.7.3	Digital Gain - CdDigitalGainT	73
10.8	DTMF Specific Definitions - dtmfdef.h	75
10.8.1	DTMF Tone Storage Options - DtmpOptT.....	75
10.8.2	Sending Duration - DtmfDurationT	75
11.	Low-Level API	76
11.1	Driver functions - driver.h.....	76
11.1.1	drvBoardExistence()	76
11.1.2	drvCmpMemBlock()	76
11.1.3	drvDisableCpuIntr().....	77
11.1.4	drvDisableLpuIntr()	77
11.1.5	drvEnableCpuIntr().....	78
11.1.6	drvEnableLpuIntr()	79
11.1.7	drvFifoLostMsgs()	79
11.1.8	drvFifoUsage()	80
11.1.9	drvFifoMaxUsage()	80
11.1.10	drvFifoSize()	81
11.1.11	drvFillMem()	81
11.1.12	drvFpgaStatus().....	82
11.1.13	drvGetBoardStatus()	82
11.1.14	drvGetStatus()	83
11.1.15	drvIdent()	83
11.1.16	drvInit()	84
11.1.17	drvInitHdLC()	84
11.1.18	drvInstallIsr()	85
11.1.19	drvRead()	86



11.1.20	drvReadEx().....	86
11.1.21	drvReadSerialNo().....	87
11.1.22	drvReadTma().....	88
11.1.23	drvReadConfigData()	89
11.1.24	drvReadDriverData()	89
11.1.25	drvReadIo().....	90
11.1.26	drvReadMem().....	90
11.1.27	drvReadMem32().....	91
11.1.28	drvReadMemBlock()	91
11.1.29	drvRegisterCallback().....	92
11.1.30	drvResetDevices()	92
11.1.31	drvResetDriver()	93
11.1.32	drvSetClkSrc()	93
11.1.33	drvSetup()	94
11.1.34	drvSetupIoWin()	95
11.1.35	drvSetupMemWin()	95
11.1.36	drvStatus2Str()	96
11.1.37	drvThorRc2Str()	97
11.1.38	drvUnInstallIsr()	97
11.1.39	drvWriteConfigData().....	98
11.1.40	drvWriteIo().....	99
11.1.41	drvWriteMem().....	99
11.1.42	drvWriteMem8().....	100
11.1.43	drvWriteMem32().....	100
11.1.44	drvWriteMemBlock()	101
11.2	Line Interface Functions - li.h.....	102
11.2.1	liAlarmOff().....	102
11.2.2	liAlarmOn()	102
11.2.3	liBitRobAccessDisable()	103
11.2.4	liBitRobAccessEnable()	103
11.2.5	liConfigure()	104
11.2.6	liExistenceChk()	106
11.2.7	liForceResynch()	106
11.2.8	liGetBitRobData()	107
11.2.9	liGetSaBitValue().....	107
11.2.10	liGetSiBitValue()	108
11.2.11	liGetStatus()	109
11.2.12	liLoop()	109
11.2.13	liSaBitAccessDisable()	110
11.2.14	liSaBitAccessEnable()	110
11.2.15	liSetBitRobData()	111
11.2.16	liSetClkMode()	112
11.2.17	liSetSaBitValue()	112
11.2.18	liSetSiBitValue().....	113
11.2.19	liTransmitPinControl().....	114
11.3	High-Level Data Control Functions - hdlc.h	115
11.3.1	hdlcInitPipe()	115
11.3.2	hdlcSendAbort()	115
11.3.3	hdlcSendData()	116
11.3.4	hdlcSendPattern()	117
11.3.5	hdlcReceiveOff()	118



11.3.6	hdlcReceiveOn()	118
11.3.7	hdlcMemoryAlloc()	119
11.3.8	hdlcMemoryFree()	120
11.3.9	hdlcMemoryWrite()	120
11.3.10	hdlcMemoryRead()	121
11.3.11	hdlcMemoryCheckId()	122
11.3.12	hdlcMemoryCheckUsage()	122
11.3.13	hdlcMemoryStartIdlePattern()	123
11.3.14	hdlcMemorySendData()	124
11.3.15	hdlcMemorySendDataList()	124
11.3.16	hdlcMemoryGetSendStatus()	125
11.3.17	hdlcSS7SetFisu()	126
11.3.18	hdlcSS7GetSendStatus()	126
11.3.19	hdlcSS7GetReceiveStatus()	127
11.3.20	hdlcSS7SetFilter()	128
11.3.21	hdlcSS7GetFilter()	128
11.3.22	hdlcSS7SendData()	129
11.3.23	hdlcSS7SendDataEx()	129
11.4	Time-Space Switch Functions - tss.h	131
11.4.1	tssClear()	131
11.4.2	tssConstByte()	131
11.4.3	tssDisable()	132
11.4.4	tssEnable()	132
11.4.5	tssInit()	133
11.4.6	tssLiConstByte()	133
11.4.7	tssLiXConnect()	134
11.4.8	tssReadDataMemory()	135
11.4.9	tssTimingMode()	136
11.4.10	tssXConnect()	136
11.5	On-board Processor Functions - lpu.h	138
11.5.1	lpuBoot()	138
11.5.2	lpuFloat()	138
11.5.3	lpuGetStatus()	139
11.5.4	lpuInstallIISR()	139
11.5.5	lpuIntr()	139
11.5.6	lpuLoadApp()	140
11.6	Flash Memory Functions - flash.h	141
11.6.1	flshCheckSectorUsage()	141
11.6.2	flshCheckUsage()	141
11.6.3	flshEraseSector()	142
11.6.4	flshLoadData()	142
11.6.5	flshLoadPrg()	143
11.6.6	flshReadMaintSect()	143
11.6.7	flshWriteMem()	144
11.7	Codec Functions - cd.h	145
11.7.1	cdConnectDtmf()	145
11.7.2	cdConnectHandsetMic()	145
11.7.3	cdConnectHandsetSpeaker()	146
11.7.4	cdConnectHandsfreeSpeaker()	146
11.7.5	cdDigitalGain()	147
11.7.6	cdDisconnectHandsetMic()	147



11.7.7	cdDisconnectHandsetSpeaker().....	148
11.7.8	cdDisconnectHandsfreeSpeaker().....	148
11.7.9	cdFilterGain()	149
11.7.10	cdInit()	150
11.7.11	cdMuteOff()	150
11.7.12	cdMuteOn()	151
11.7.13	cdReset()	151
11.7.14	cdSendDtmf()	152
11.7.15	cdSendMf()	152
11.7.16	cdToneOff()	153
11.7.17	cdVoiceSideToneOff()	154
11.7.18	cdVoiceSideToneOn()	154
11.8	DTMF Transceiver Function - dtmf.h.....	156
11.8.1	dtmfBurstStatus().....	156
11.8.2	dtmfEnable()	156
11.8.3	dtmfReceived()	157
11.8.4	dtmfReset()	157
11.8.5	dtmfSend()	158
11.8.6	dtmfSendBurst()	158
11.8.7	dtmfToneOff()	159
11.8.8	dtmfToneOn()	159
12.	System API - t2vxddef.h.....	162
12.1	Driver (DRV) Operations	162
12.1.1	IOCTL_DRV_BOARD_EXISTENCE.....	162
12.1.2	IOCTL_DRV_CMP_MEM_BLOCK.....	162
12.1.3	IOCTL_DRV_CONFIGURE_LI.....	163
12.1.4	IOCTL_DRV_CONFIGURE_PIPE	163
12.1.5	IOCTL_DRV_DISABLE_CPU_INTR	164
12.1.6	IOCTL_DRV_DISABLE_LPU_INTR	165
12.1.7	IOCTL_DRV_ENABLE_CPU_INTR	166
12.1.8	IOCTL_DRV_ENABLE_LPU_INTR	166
12.1.9	IOCTL_DRV_ERROR_2_STR	167
12.1.10	IOCTL_DRV_FIFO_USAGE	168
12.1.11	IOCTL_DRV_FIFO_MAX_USAGE	168
12.1.12	IOCTL_DRV_FIFO_LOST_MSGS	169
12.1.13	IOCTL_DRV_FIFO_SIZE	170
12.1.14	IOCTL_DRV_FILL_MEM	170
12.1.15	IOCTL_FPGA_STATUS	171
12.1.16	IOCTL_DRV_IDENT	172
12.1.17	IOCTL_DRV_INIT	172
12.1.18	IOCTL_DRV_INIT_HDLC	173
12.1.19	IOCTL_DRV_READ	174
12.1.20	IOCTL_DRV_READ_EX	175
12.1.21	IOCTL_DRV_READ_SERIAL_NO	176
12.1.22	IOCTL_DRV_READ_TMA	176
12.1.23	IOCTL_DRV_READ_CONFIG_DATA	177
12.1.24	IOCTL_DRV_READ_IO	178
12.1.25	IOCTL_DRV_READ_MEM	178
12.1.26	IOCTL_DRV_READ_MEM32	179
12.1.27	IOCTL_DRV_READ_MEM_BLOCK	180



12.1.28	IOCTL_DRV_RESET_DEVICES	180
12.1.29	IOCTL_DRV_RESET_DRIVER	181
12.1.30	IOCTL_DRV_RESET_HDLC	181
12.1.31	IOCTL_DRV_SET_CLK_SRC.....	182
12.1.32	IOCTL_DRV_SETUP	183
12.1.33	IOCTL_DRV_SETUP_IO_WIN.....	183
12.1.34	IOCTL_DRV_SETUP_MEM_WIN.....	184
12.1.35	IOCTL_DRV_START_EVENT_NOTIFICATIONS	185
12.1.36	IOCTL_DRV_STOP_EVENT_NOTIFICATIONS.....	186
12.1.37	IOCTL_DRV_STATUS_2_STR.....	186
12.1.38	IOCTL_DRV_THOR_RC_2_STR.....	187
12.1.39	IOCTL_DRV_REG_VALUES	188
12.1.40	IOCTL_DRV_STATUS	189
12.1.41	IOCTL_DRV_WRITE_CONFIG_DATA	189
12.1.42	IOCTL_DRV_WRITE_IO	190
12.1.43	IOCTL_DRV_WRITE_MEM	191
12.1.44	IOCTL_DRV_WRITE_MEM8	191
12.1.45	IOCTL_DRV_WRITE_MEM32	192
12.1.46	IOCTL_DRV_WRITE_MEM_BLOCK.....	193
12.2	Line Interface (LI) Operations	194
12.2.1	IOCTL_LI_ALARM_OFF	194
12.2.2	IOCTL_LI_ALARM_ON	194
12.2.3	IOCTL_LI_BIT_ROB_ACCESS_DISABLE	195
12.2.4	IOCTL_LI_BIT_ROB_ACCESS_ENABLE	196
12.2.5	IOCTL_LI_CONFIGURE	197
12.2.6	IOCTL_LI_EXISTENCE_CHK	198
12.2.7	IOCTL_LI_FORCE_RESYNCH	199
12.2.8	IOCTL_LI_GET_BIT_ROB_DATA	200
12.2.9	IOCTL_LI_GET_SA_BIT_VALUE	200
12.2.10	IOCTL_LI_GET_SI_BIT_VALUE	201
12.2.11	IOCTL_LI_GET_STATUS	202
12.2.12	IOCTL_LI_LOOP	203
12.2.13	IOCTL_LI_SA_BIT_ACCESS_DISABLE	203
12.2.14	IOCTL_LI_SA_BIT_ACCESS_ENABLE	204
12.2.15	IOCTL_LI_SET_BIT_ROB_DATA	205
12.2.16	IOCTL_LI_SET_CLK_MODE	206
12.2.17	IOCTL_LI_SET_SA_BIT_VALUE	206
12.2.18	IOCTL_LI_SET_SI_BIT_VALUE	207
12.2.19	IOCTL_LI_TRANSMIT_PIN_CONTROL	208
12.3	High-Level Data Control (HDLC) Operations	210
12.3.1	IOCTL_HDLC_INIT_PIPE	210
12.3.2	IOCTL_HDLC_SEND_ABORT	210
12.3.3	IOCTL_HDLC_SEND_DATA	211
12.3.4	IOCTL_HDLC_SEND_PATTERN	212
12.3.5	IOCTL_HDLC_RECEIVE_OFF	213
12.3.6	IOCTL_HDLC_RECEIVE_ON	214
12.3.7	IOCTL_HDLC_MEMORY_ALLOC	215
12.3.8	IOCTL_HDLC_MEMORY_FREE	216
12.3.9	IOCTL_HDLC_MEMORY_WRITE	216
12.3.10	IOCTL_HDLC_MEMORY_READ	217
12.3.11	IOCTL_HDLC_MEMORY_CHECK_ID	218



12.3.12	IOCTL_HDLC_MEMORY_CHECK_USAGE.....	219
12.3.13	IOCTL_HDLC_MEMORY_START_IDLE_PATTERN	220
12.3.14	IOCTL_HDLC_MEMORY_SEND_DATA	221
12.3.15	IOCTL_HDLC_MEMORY_SEND_DATA_LIST.....	222
12.3.16	IOCTL_HDLC_MEMORY_GET_SEND_STATUS	223
12.3.17	IOCTL_HDLC_SS7_SET_FISU	223
12.3.18	IOCTL_HDLC_SS7_GET_SEND_STATUS.....	224
12.3.19	IOCTL_HDLC_SS7_GET_RECEIVE_STATUS	225
12.3.20	IOCTL_HDLC_SS7_SET_FILTER.....	226
12.3.21	IOCTL_HDLC_SS7_GET_FILTER	226
12.3.22	IOCTL_HDLC_SS7_SEND_DATA	227
12.3.23	IOCTL_HDLC_SS7_SEND_DATA_EX	228
12.4	Time-Space Switch (TSS) Operations	230
12.4.1	IOCTL_TSS_CLEAR	230
12.4.2	IOCTL_TSS_CONST_BYTE	230
12.4.3	IOCTL_TSS_DISABLE.....	231
12.4.4	IOCTL_TSS_ENABLE	232
12.4.5	IOCTL_TSS_INIT.....	232
12.4.6	IOCTL_TSS_LI_CONST_BYTE	233
12.4.7	IOCTL_TSS_LI_XCONNECT	234
12.4.8	IOCTL_TSS_READ_DATA_MEMORY.....	235
12.4.9	IOCTL_TSS_TIMING_MODE	235
12.4.10	IOCTL_TSS_XCONNECT	236
12.5	On-board Processor (LPU) Operations	238
12.5.1	IOCTL_LPU_BOOT	238
12.5.2	IOCTL_LPU_FLOAT	238
12.5.3	IOCTL_LPU_GET_STATUS	239
12.5.4	IOCTL_LPU_INSTALL_ISR	239
12.5.5	IOCTL_LPU_INTR.....	240
12.6	Flash Memory (FLASH) Operations	241
12.6.1	IOCTL_FLSH_CHECK_SECTOR_USAGE.....	241
12.6.2	IOCTL_FLSH_CHECK_USAGE.....	241
12.6.3	IOCTL_FLSH_ERASE_SECTOR.....	242
12.6.4	IOCTL_FLSH_LOAD_DATA	243
12.6.5	IOCTL_FLSH_READ_MAINT_SECT	243
12.6.6	IOCTL_FLSH_WRITE_MEM	244
12.7	Codec (CD) Operations.....	246
12.7.1	IOCTL_CD_CONNECT_DTMF	246
12.7.2	IOCTL_CD_CONNECT_HANDSET_MIC	246
12.7.3	IOCTL_CD_CONNECT_HANDSET_SPEAKER.....	247
12.7.4	IOCTL_CD_CONNECT_HANDSFREE_SPEAKER.....	248
12.7.5	IOCTL_CD_DIGITAL_GAIN	248
12.7.6	IOCTL_CD_DISCONNECT_HANDSET_MIC	249
12.7.7	IOCTL_CD_DISCONNECT_HANDSET_SPEAKER	250
12.7.8	IOCTL_CD_DISCONNECT_HANDSFREE_SPEAKER	251
12.7.9	IOCTL_CD_FILTER_GAIN	251
12.7.10	IOCTL_CD_INIT	252
12.7.11	IOCTL_CD_MUTE_OFF	253
12.7.12	IOCTL_CD_MUTE_ON	253
12.7.13	IOCTL_CD_RESET	254
12.7.14	IOCTL_CD_SEND_DTMF	255



12.7.15	IOCTL_CD_SEND_MF.....	255
12.7.16	IOCTL_CD_TONE_OFF.....	256
12.7.17	IOCTL_CD_VOICE_SIDE_TONE_OFF.....	257
12.7.18	IOCTL_CD_VOICE_SIDE_TONE_ON	258
12.8	Dual Tone Multi Frequency Transceiver (DTMF) Operations	259
12.8.1	IOCTL_DTMF_BURST_STATUS	259
12.8.2	IOCTL_DTMF_ENABLE.....	259
12.8.3	IOCTL_DTMF_RECEIVED.....	260
12.8.4	IOCTL_DTMF_RESET	261
12.8.5	IOCTL_DTMF_SEND.....	261
12.8.6	IOCTL_DTMF_SEND_BURST	262
12.8.7	IOCTL_DTMF_TONE_OFF	263
12.8.8	IOCTL_DTMF_TONE_ON	263
13.	High-Level API - thorhapi.h	266
13.1	Driver Functions	266
13.1.1	thorIdentDriver()	266
13.1.2	thorConstructDriver()	266
13.1.3	thorDestructDriver()	268
13.1.4	thorRegisterCallback()	269
13.1.5	thorResetDriver().....	269
13.1.6	thorSetCpuIntrMask().....	270
13.1.7	thorSetLpuIntrMask().....	271
13.2	Line Interface Functions	273
13.2.1	thorConfigureLi()	273
13.2.2	thorGetStatusLi()	273
13.2.3	thorSaBytesOn()	274
13.2.4	thorSaBytesOff().....	275
13.2.5	thorGetSaBitValue()	275
13.2.6	thorSetSiBitValue().....	276
13.2.7	thorGetSiBitValue()	276
13.2.8	thorAlarmOn().....	277
13.2.9	thorAlarmOff()	278
13.2.10	thorResetLi()	278
13.3	Switching	279
13.3.1	thorConnectChannel()	279
13.3.2	thorDisconnectChannel().....	279
13.3.3	thorDisconnectAllChannels()	280
13.4	Message Sending and Receiving.....	281
13.4.1	thorConfigurePipe().....	281
13.4.2	thorRead().....	281
13.4.3	thorWritePipe()	282
13.4.4	thorResetHdLC()	283
13.5	Phone Functions	284
13.5.1	thorPhoneOn()	284
13.5.2	thorPhoneOff().....	284
13.5.3	thorSendDtmf().....	285
13.5.4	thorReceivedDtmf()	285
13.6	Test Functions	287
13.6.1	thorByteOnBch()	287



13.6.2	thorByteOffBch().....	287
13.6.3	thorByteReadBch().....	288
13.7	Miscellaneous.....	289
13.7.1	thorGetErrMsg()	289
13.7.2	thorBoardExistence().....	289
13.7.3	thorLoopLi()	290



1. Abstract

The Thor-2 driver provides the software needed by the PC host processor (CPU) to communicate with the board. The driver also contains boot-up software and the operating system for the on-board processor (LPU). The CPU Software is implemented in C language and it is provided in the form a virtual device driver (Thor2.vxd) and C wrapper libraries (*.lib). The driver also provides C-language header files (*.h) that declare the macros, types, and functions available in the wrapper libraries. The driver can be accessed directly through the Windows *DeviceIoControl()* interface or Thor wrapper libraries can be linked to a higher level C or C++ application to provide the software interface towards the driver.

2. Applicable Products

The Thor drivers covered by this document are listed in Table 1 on page 12.

TABLE 1. THOR Drivers covered by this document.

Product Number	Description
SDA-1003-1	Thor Windows 95 Driver and Application Programming Interface. Compiled with Visual C++ 4.2

3. Distribution

The Thor-2 driver is distributed on 3.5" diskettes. Separate diskettes exists for each driver version. The Thor driver distribution diskette contains a setup program (SETUP.EXE) which installs the driver distribution. After installation, the following files and directories are created:

TABLE 2. Thor driver distribution content

Directory	Files	Description
LIB	Thor2.lib	Thor API Library compiled with the applicable compiler.
INC	*.h	Thor API header files



TABLE 2. Thor driver distribution content

Directory	Files	Description
UTILS	T2boot.exe	Utility program for loading the on-board Field Programmable Gate Arrays (FPGAs) and for booting the on-board processor (LPU). For a complete description please refer to "User Guide for Thor-2", Doc No. 1412-1-HAA-1004-1.
	T2config.exe	Utility program (Console Application) for reading and writing the line interface configuration data to the on-board flash memory. For a complete description please refer to "User Guide for Thor-2", Doc No. 1412-1-HAA-1004.
	T2ConfigW.exe	Utility program (Windows Application) for reading and writing the line interface configuration data to the on-board flash memory
	T2.cfg	The default configuration data file. For a complete description please refer to "User Guide for Thor-2", Doc No. 1412-1-HAA-1004-1.



TABLE 2. Thor driver distribution content

Directory	Files	Description
DEMOS	Sapiapp.exe Sapiapp.c Makefile	System API demo program. Sending and receiving of HDLC frames through the looped Line Interfaces.
	Lapiapp.exe Lapiapp.c Makefile	Low-Level API demo program. Sending and receiving of HDLC frames through the looped Line Interfaces.
	Hapiapp.exe Hapiapp.c Makefile	High-Level API demo program. Sending and receiving of HDLC frames through the looped Line Interfaces.
	Dataapp.exe Dataapp.c Makefile	Demo program using Transparent Mode Pipes. Transfers a binary file between two Line interfaces.
	Patapp.exe Patapp.c Makefile	Example program using Transparent Mode Pipes. Processing of full 2,048 Mbit/s stream. Continuously sends and receives data on 32 time-slots.
	T1app.exe T1app.c Makefile	Example program demonstrating Thor-2's T1 specific functions; E.g.. the use Bit-robbed signalling.
	E1app.exe E1app.c Makefile	Example program demonstrating Thor-2's E1 specific function; E.g. access to the Si and Sa bits.
	Phoneapp.exe Phoneapp.c Makefile	Example program demonstrating Thor-2's phone and DTMF tone capabilities.
	Perfapp.exe Perfapp.c Makefile	Example program demonstrating Thor-2's capability to send and receive HDLC frames simultaneously on multiple channels.
	Statusapp.exe Statusapp.c Statusapp.dsp Makefile	Example program which checks the status of the driver and the installed Thor-2 boards.
\	Audioapp.exe Audioapp.c Audioapp.dsp Makefile	Example program demonstrating Thor-2's audio capabilities and the use of hdlcMemoryXXXXX() API functions.
	SS7app.exe SS7app.c SS7app.dsp Makefile	Example program demonstrating Thor-2 driver's SS#7 support and the use of hdlcSS7XXXX() API functions.
	Readme	Release notes and changes made after printing of this documentation.
	Revision.h	Header file containing the Driver Revision
System	Thor2.vxd	Thor-2 Windows 95 Virtual Device Driver



The installation program also copies the Thor-2 Virtual device driver (Thor2.vxd) into the Windows System Directory.



4. Driver Overview

4.1 Application Programming Interface (API)

The Thor-2 driver is accessed from the application software through a specified Application Programming Interface (API). The Thor-2 API is a C function-call interface. The Application Programmer can request actions from the driver with high-level function calls without intimate knowledge of the hardware and of the low-level hardware interface. The Thor-2 driver then converts the application requests into appropriate I/O and memory access operations towards the Thor-2 hardware. The Thor-2 Driver also services the interrupts generated by the Thor-2 board. The relationship between the Application Program, the Thor-2 driver, and the Thor-2 Board is illustrated in Figure 1 on page 16.

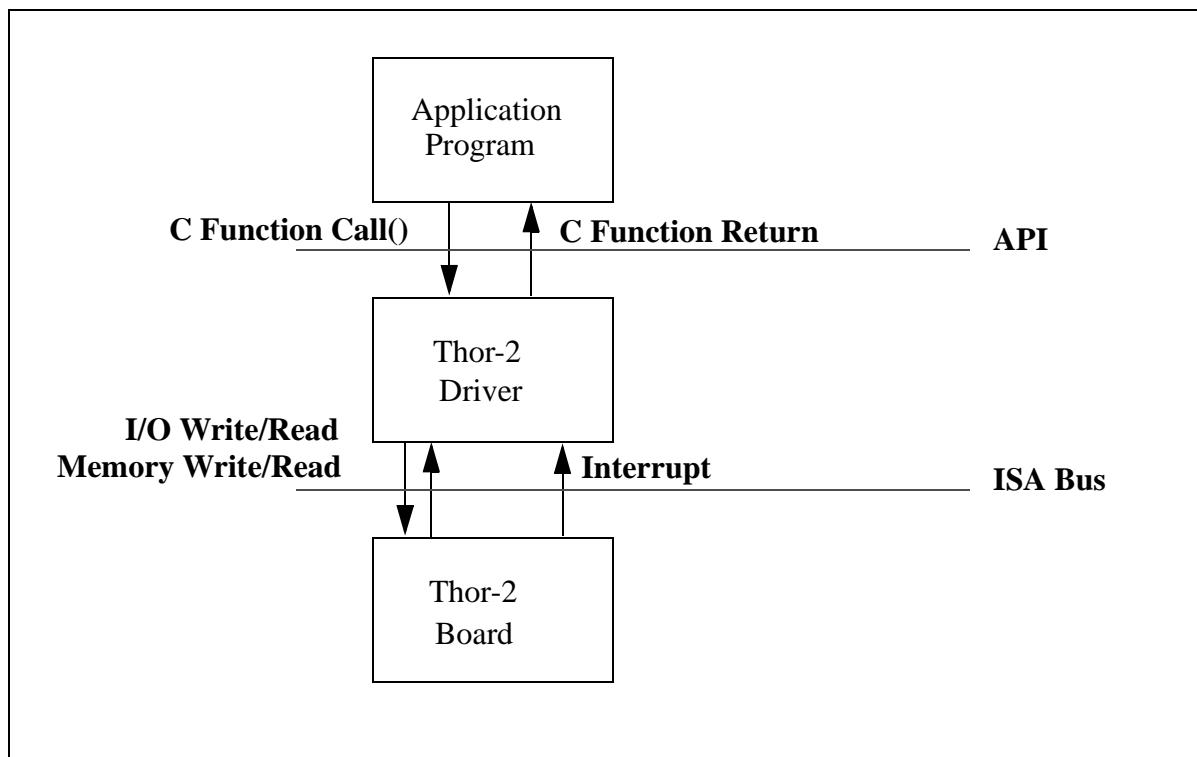


Figure 1. Thor-2 Driver Interfaces

The Thor-2 driver contains three different APIs: The High-level API (HAPI), the Low-level API (LAPI), and the System API (SAPI).

The System API allows the application to communicate directly with the Thor-2 VxD through the Windows *DeviceIoControl()* Interface. The Low-level API and the High-Level API are wrapper packages built on-top of the System API that allow the application to communicate with the driver with more familiar function calls. The



LAPI and HAPI are provided to allow easier portability of applications from platform to platform. However, the drawback with the LAPI and HAPI interfaces are that, a library must be linked to the application, while the SAPI can be used without an extra linked library.

The High-level API consists of easy-to-use, “pre-packaged” functions. The High-level API functions have been designed to implement “standard applications”; e.g. setting up of a CEPT ISDN primary rate link. These functions provide a minimal set of options to the user but they are designed to be easy and quick to use.

The Low-level API, on the other hand, provides more flexibility to the user. The full functionality of the Thor-2 board can be utilized through the low-level API. However, the functions at this level contain more parameters and require more involvement from the application programmer. The High-level API is implemented using the Low-level API, as illustrated in Figure 2 on page 18.

The System API provides the same functions as the Low-Level API. The benefit of the System API is that no libraries have to be linked to the application. Thus, the driver can be updated (by replacing the Thor2.sys) without having to re-link the application. Thus, for Windows 95 and Windows NT applications the use of the System API is preferred to the Low-Level API and the High-Level API. The Low-Level API is implemented using the System API, and the High-Level API is implemented using the Low-Level API, as illustrated in Figure 2 on page 18.

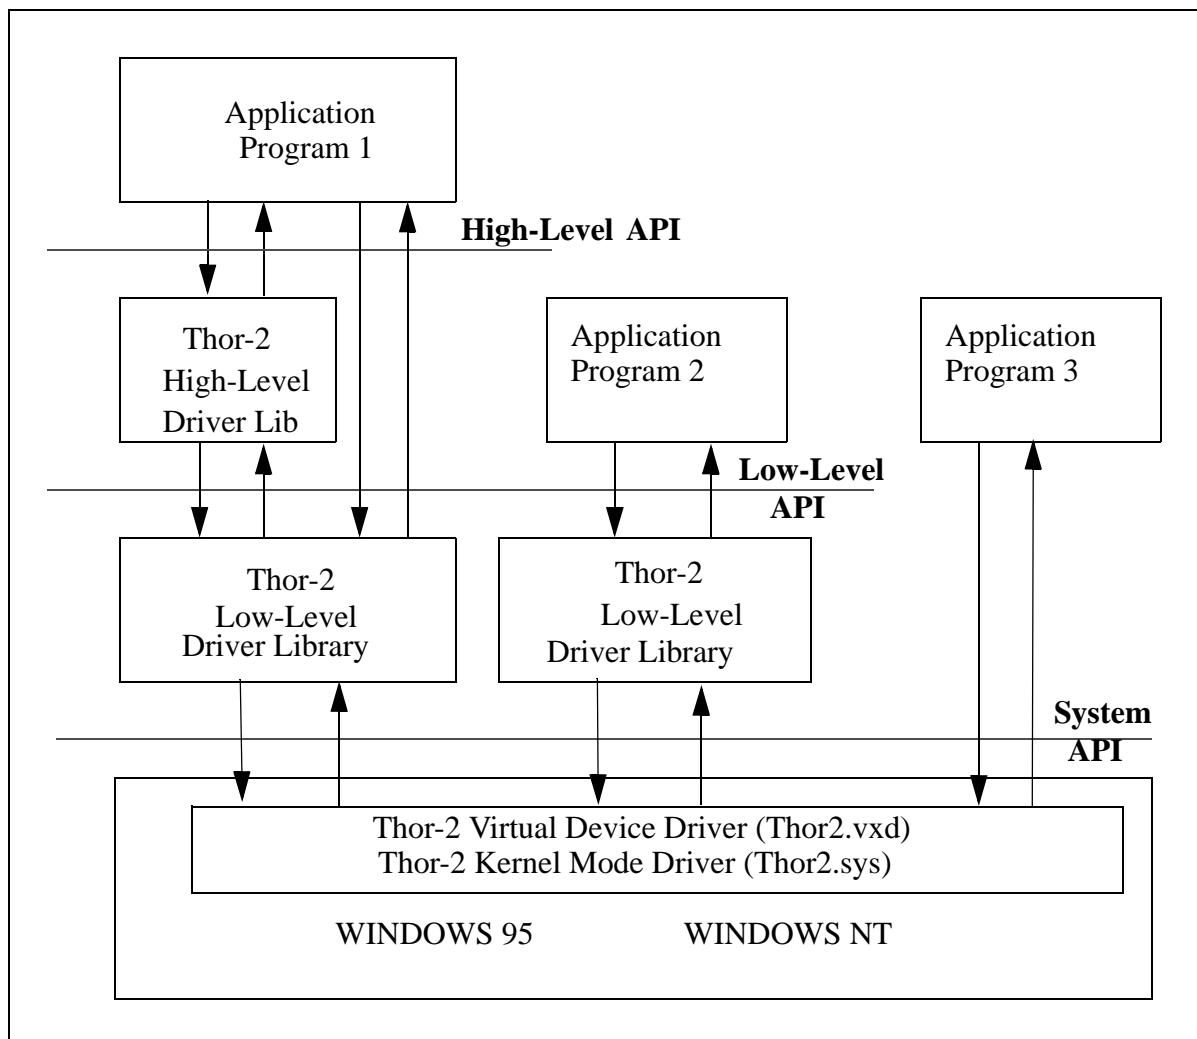



Figure 2. Thor-2 Driver's Three APIs

The three different APIs are compared in Table 3.



TABLE 3. Comparison of Thor-2 APIs

API	Pros	Cons
SAPI	No libraries need to be linked to an application. Driver can be updated without any impact on the applications. Flexible. Wide variety of operations available.	Only available in Windows 95 and Windows NT.
LAPI	Highly portable: Available in DOS, Windows 95, Windows NT, and LPU. Flexible. Wide variety of functions available.	Thor2.lib needs to be linked to the application. If the driver library is updated, applications must be re-linked.
HAPI	Highly portable: Available in DOS, Windows 95, Windows NT, and LPU. Optimized for Traffic Generator applications.	Thor2.lib needs to be linked to the application. If the driver library is updated, applications must be re-linked. Limited number of functions available.

4.2 Files

The Thor-2 Driver package consists of header (*.h) and library (*.lib) files. The files included in the Thor-2 Driver are shown in Figure 3 on page 20 (Solid black frame) and listed in Table 4 on page 20.

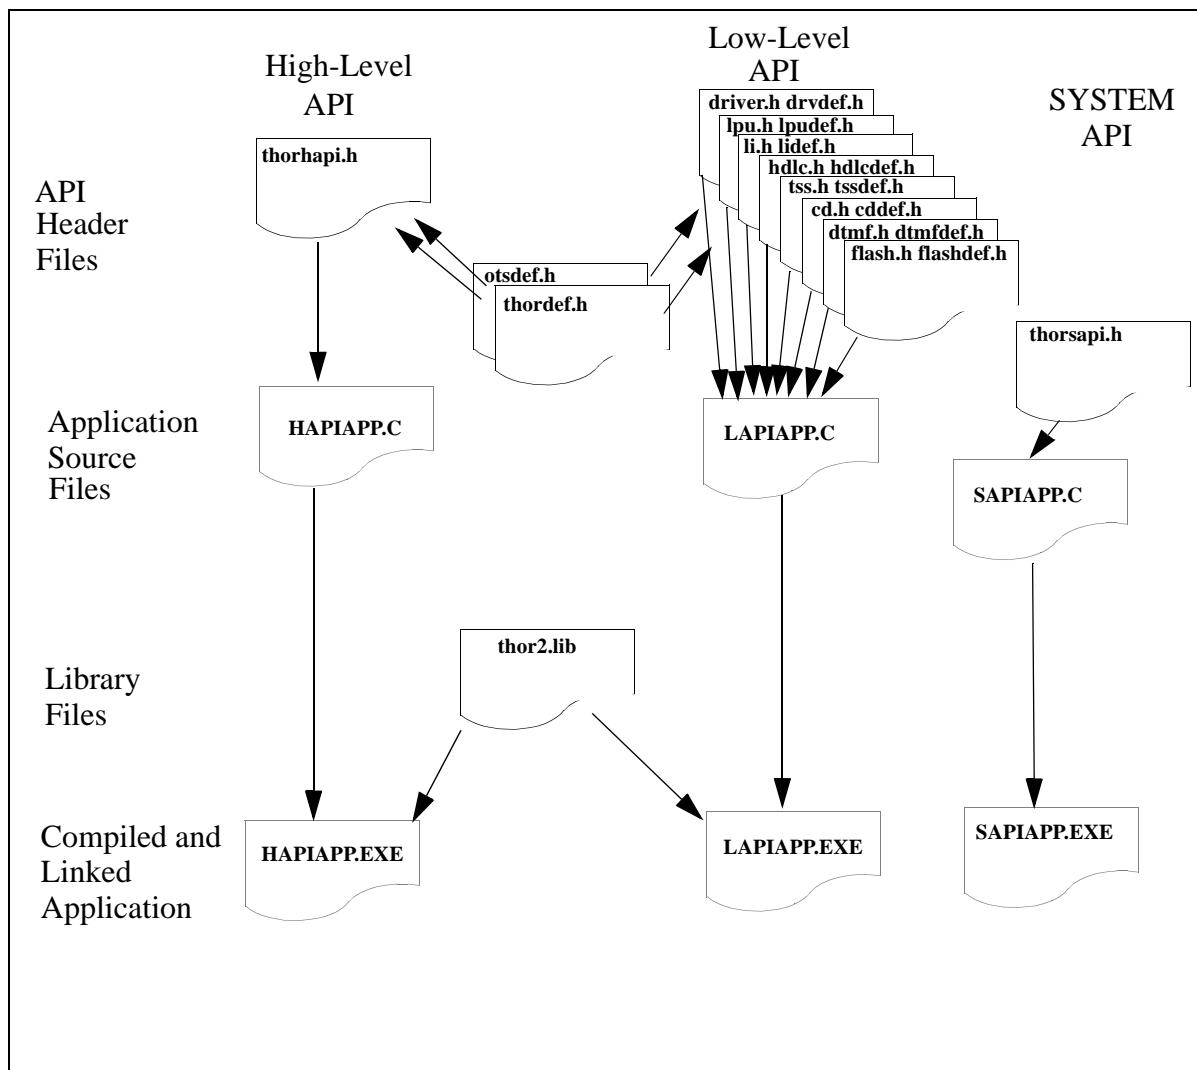


Figure 3. The overall Thor-2 Driver File Structure

TABLE 4. API Definition Header Files

API Level	Header file name	Description
High-level API	thorhapi.h	Macro definitions, type definitions, and function declarations for the high-level API.

**TABLE 4. API Definition Header Files**

API Level	Header file name	Description
Low-level API	driver.h	Driver level functions declarations
	li.h	Functions for using the T1/E1 Line Interfaces (LIs).
	hdlc.h	Functions for utilizing the 32-channel HDLC controller.
	tss.h	Functions for using the 384x384 time-space switch.
	cd.h	Functions for the two Codecs.
	dtsmf.h	Functions for using the two DTMF Transceivers.
	flash.h	Functions for utilizing the 512 kbyte Flash memory.
	lpu.h	Functions for controlling the Local Processing Unit (LPU)
System API	thorsapi.h	Type and macro definitions for the Windows DeviceIoControl Interface.
Common	otsdef.h	Odin TeleSystems general macro and type definitions
	thordef.h	Thor API macro and type definitions
	drvdef.h	Macros, Constants and Type Definition for the driver
	lidef.h	Macros, Constants and Type Definition for the Line Interfaces
	hdlcdef.h	Macros, Constants and Type Definition for the HDLC Controller
	tssdef.h	Macros, Constants and Type Definition for the Time-Space Switch
	cddef.h	Macros, Constants and Type Definition for the Codecs
	dtsmfdef.h	Macros, Constants and Type Definition for the DTMF transceiver
	flashdef.h	Macros, Constants and Type Definition for the Flash Memory
	lpudef.h	Macros, Constants and Type Definition for the LPU

4.3 Naming Conventions

The functions and data types used within the API follow a naming convention. All the names have a prefix (E.g. Thor in the high-level API). The case of the prefix for functions, data types, and macros is different, as shown in Table 4 on page 20.

TABLE 5. Thor API Prefixes

Element	Prefix Case	Prefix Example
Function	All Small Letters	thor
Type	Start with Uppercase	Thor



TABLE 5. Thor API Prefixes

Element	Prefix Case	Prefix Example
Macro	All Capital Letters	THOR_

The function names consist of three parts: the prefix, the operation, and the qualifier. The operation word is a verb describing the action to be taken, e.g., construct, read. The qualifier either be a target or a result of the operation. The target describes the entity which will be impacted by the operation: E.g., ‘Driver’ or ‘Li’. The result describes the wanted end state of the operation: E.g. ‘On’, or ‘Off’.

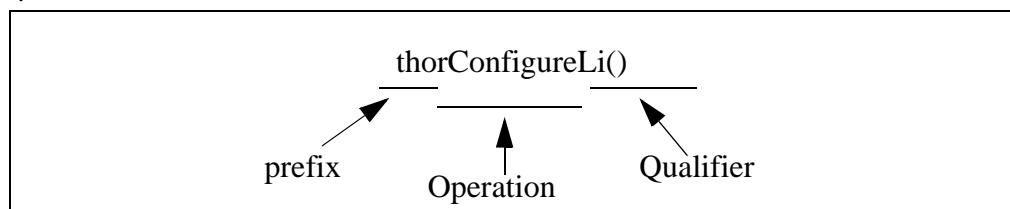


Figure 4. An Example of the Naming of the Functions.

The used prefixes are listed in Table 4 on page 20.

TABLE 6. Thor-2 prefixes

API Level	File name	Prefix and its meaning
High-level API	thorhapi.h	thor for the THOR-2 board
Low-level API	driver.h	drv for Driver.
	li.h	li for a Line Interface.
	hdlc.h	hdlc for the High-level Data Link Control.
	tss.h	tss for a Time-Space Switch
	cd.h	cd for a Codecs.
	dtnf.h	dtnf for a Dual Tone Multi Frequency
	flash.h	flash for the FLASH memory
System API	lpu.h	lpu for Local Processing Unit
	thorsapi.h	ioctl for I/O Control

4.3.1 Exception Handling

Exception handling is provided via function return codes. The return codes have defined as an enumerated type ThorRc. Each function returns 1 (“THOR_SUCCESS”) if the operation was successful (no errors). In a case of an error



the function returns a non-zero value (other than 1). the value 0 is an “undefined” return code (“THOR_UNDEFINED”). The return codes can be translated into strings containing the error message with the “*thorGetErrMsg()*” function.

4.3.2 Standard Parameters

The driver supports up to four Thor-2 boards. Most of the functions in the API apply to one board at the time. Those functions always have the board number as the first parameters. The valid board numbers are 0 - 3. Certain resources are duplicated on the Thor-2 board; E.g., the Line Interfaces, the Codecs, and the DTMF Transceivers. When a function applies to a specific circuit on a board, the second parameter to the function will be the chip number (0 or 1). Figure 5 on page 23 illustrates a typical Thor-2 API function declaration.

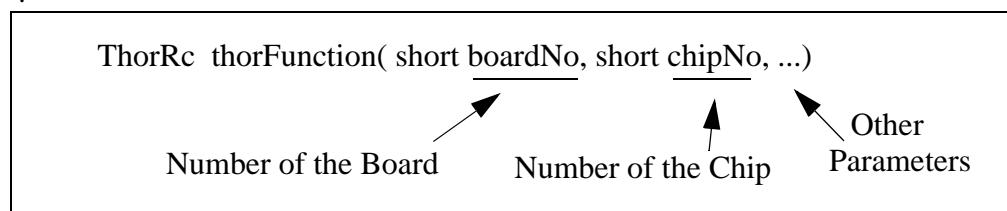


Figure 5. **A typical function declaration**



5. Configuration using *T2Config.exe* or *T2ConfigW.exe*

The Thor-2 board contains 512 KBytes Flash memory. The Flash is used by the Thor-2 driver to persistently store the T1/E1 link configuration parameters. Thor-2 is delivered with utility programs *T2Config.exe* and *T2ConfigW.exe* which can be used to store configuration information into the flash. *T2Config.exe* is a command line tool while *T2ConfigW.exe* is a windows application with a Graphical User Interface.

An application using the Thor-2 driver can then retrieve the information from flash and configure the driver and the board accordingly. For more information on the Thor-2 Configuration file and the *T2Config.exe* utility program, please refer to the *Thor-2 User Guide* (Odin TeleSystems Inc. Doc. No. 1412-1-HAA-1004-1).

The overall process of how the configuration parameters are set is described in the following:

1. The user sets the wanted configuration parameters by editing the Thor-2 configuration file either with an editor or with *T2ConfigW.exe*.
2. The user runs *T2Config.exe* or *T2ConfigW.exe* to load the configuration to the on-board flash memory.
 - 2.1. *T2Config.exe/T2ConfigW.exe* parses and syntax checks the configuration file.
 - 2.2. If the configuration parameters are different than the ones stored in the flash already, *T2Config.exe/T2ConfigW.exe* stores the new parameters into the Flash. If the parameters have not changed, *T2Config.exe/T2ConfigW.exe* does nothing.
3. The application program can call the *drvReadConfigData()* or *IOCTL_DRV_READ_CONFIG_DATA* functions to read the stored configuration parameters from the flash memory.
4. The application program can modify the parameters or pass them as is to *liConfigure()* or *IOCTL_LI_CONFIGURE* functions. The application program can also set the clock source with *drvSetClkSrc()* or *IOCTL_DRV_SET_CLK_SRC* functions.
5. If the application program wants to store different values into the flash, it can do so with *drvWriteConfigData()* or *IOCTL_DRV_WRITE_CONFIG_DATA* functions.





6. Low-Level API Function Calling Sequence Example

The recommended calling sequence for initialization of the driver using the Low-Level API with the Thor-2 Driver is described in the following:

```
// Thor-2 Application using the Low-Level API: Calling Sequence example

void main()
{
    ThorRc t2Rc;

    // Init board and driver structs:
    // -----
    t2Rc = drvInit(...);
    if (t2Rc != THOR_SUCCESS) {
        // Error
    }
    // Check that driver is up and running
    // -----
    t2Rc = drvGetStatus(...);

    // Reset all devices:
    // -----
    t2Rc = drvResetDevices(...);

    // Initialize Devices:
    // -----
    tssInit(bNo);
    t2Rc = drvInitHdLC(...);

    // Read Config Data from Flash:
    // -----
    t2Rc = drvReadConfigData(...);

    // Set clock source:
    // -----
    t2Rc = drvSetClkSrc(...);

    // Configure Line Interfaces:
    // -----
    t2Rc = liConfigure(...);
    t2Rc = liConfigure(...);

    // Configure the pipes:
    // -----
}
```



```

        for (short pipe = 0; pipe <= 1; pipe++) {
            t2Rc = hdlcInitPipe(...);
        }

        // Time-Space Switch connections:
        // -----
        tssXConnect(...);
        tssXConnect(...);

        // Register the callback function for Driver events
        // -----
        t2Rc = drvRegisterCallback(callbackFunction);

        // Main Routine:
        // ----

        // Get a handle for Standard Input
        hStdin = GetStdHandle(STD_INPUT_HANDLE);
        do {
            // go to sleep (waiting for Keyboard event or callback)
            sysRc = WaitForSingleObject(hStdin, 300000);

            // Read and process the usable character
            ReadFile(hStdin, &readChar, 1, &nrRead, 0);
            exitFlag = processCommand(bNo, readChar);
        } while (exitFlag);

        // Cleanup the driver:
        // -----
        t2Rc = drvCleanup();
    } // main

    void callbackFunction()
    {
        ThorRc thorRc;
        do { // Keep reading as long as we have messages in the FIFO
            thorRc = drvRead(...);
            if (thorRc != THOR_NO_FRAMES) {
                // A frame (hdlc message, status message, or DTMF digit
                // Received, process
                :
            }
        } while (thorRc != THOR_NO_FRAMES);
    }
}

```



```
}
```

```
int processCommand(char cmd)
{
    switch (cmd) {
        case 'q':
            // Quit program:
            return 1;
            break;
        case 't':
            hdlcSendData();
            break;
    }
    return 0;
}
```





7. System API Function Calling Sequence Example

The recommended calling sequence for initialization of the driver using the System API with the Thor-2 Driver is described in the following:

```
// Thor-2 Application using the System API: Calling Sequence example

void main()
{
    ThorRc thorRc;
    long nBytes = 0;

    // Get a handle to the VxD:
    // -----
    vxdHandle =
        CreateFile("\\\\.\THOR2", 0, 0, 0, OPEN_EXISTING, FILE_ATTRIBUTE_NORMAL, 0);
    if (vxdHandle == INVALID_HANDLE_VALUE) {
        // Error:
        exit(1);
    }

    // Check VxD Status:
    // -----
    IoctlDrvVxDStatusReturnT     vsS;
    :
    devRc = DeviceIoControl(vxdHandle, IOCTL_DRV_VXD_STATUS, NULL, 0, &vsS,
                           sizeof(vsS), &nBytes, 0);
    if (vsS.vxdStatus != THOR_SUCCESS) {
        exit(3); // VxD not running
    }

    {
        IoctlDrvStringReturnT   drvStrs;
        devRc = DeviceIoControl(vxdHandle, IOCTL_DRV_IDENT, NULL, 0, &drvStrs,
                               sizeof(drvStrs), &nBytes, 0);
        if (!devRc || !nBytes || (drvStrs.rc != THOR_SUCCESS) ) {
            // Error:
            exit(2);
        }
    }

    // Initialize The HDLC Controller:
    // -----
    IoctlDrvInitHdclcT   drvInitHdclcs;
    IoctlDrvInitHdclcReturnT  drvInitHdclcReturnS;
    :
```



```

devRc = DeviceIoControl(vxdHandle, IOCTL_DRV_INIT_HDLC, &drvInitHdlcS,
sizeof(drvInitHdlcS), &drvInitHdlcReturnS, sizeof(drvInitHdlcReturnS), &nBytes,
0);

// Read Config Data from Flash
// -----
IoctlDrvReadConfigDataReturnT drvReadConfigDataS;
:

devRc = DeviceIoControl(vxdHandle, IOCTL_DRV_READ_CONFIG_DATA, &boardNo,
sizeof(boardNo), &drvReadConfigDataS, sizeof(drvReadConfigDataS), &nBytes, 0);
}

// Set the clock source:
// -----
IoctlDrvSetClkSrcT drvSetClkSrcS;
:

devRc = DeviceIoControl(vxdHandle, IOCTL_DRV_SET_CLK_SRC, &drvSetClkSrcS,
sizeof(drvSetClkSrcS), &thorRc, sizeof(thorRc), &nBytes, 0);

// Configure Line Interfaces:
// -----
IoctlLiConfigureT liConfigureS = {boardNo, 0, THOR_E1};
:

devRc = DeviceIoControl(vxdHandle, IOCTL_LI_CONFIGURE, &liConfigureS,
sizeof(liConfigureS), &thorRc, sizeof(thorRc), &nBytes, 0);
devRc = DeviceIoControl(vxdHandle, IOCTL_LI_CONFIGURE, &liConfigureS,
sizeof(liConfigureS), &thorRc, sizeof(thorRc), &nBytes, 0);

// Configure the pipes:
// -----
IoctlHdlcInitPipeT hdlcInitPipeS;
:

devRc = DeviceIoControl(vxdHandle, IOCTL_HDLC_INIT_PIPE, &hdlcInitPipeS,
sizeof(hdlcInitPipeS), &thorRc, sizeof(thorRc), &nBytes, 0);

// Time-Space Switch connections:
// -----
IoctlTssXConnectT tssXConnects;
:

devRc = DeviceIoControl(vxdHandle, IOCTL_TSS_XCONNECT, &tssXConnects,
sizeof(tssXConnects), &thorRc, sizeof(thorRc), &nBytes, 0);

// Main Routine
// -----
{
    HANDLE handleArr[2];
    int exitFlag = 0;
}

```



```

    // Create the notification event
    handleArr[0] = CreateEvent(NULL, FALSE, FALSE, NULL);
    // Get handle to the console
    handleArr[1] = GetStdHandle(STD_INPUT_HANDLE);

    // Change the console to terminal mode
    GetConsoleMode(handleArr[1], &conModeOrg);
    conModeNew = conModeOrg & ~ENABLE_LINE_INPUT & ~ENABLE_ECHO_INPUT;
    SetConsoleMode(handleArr[1], conModeNew);

    do {
        // Wait for a HW event or for a keystroke, timeout after 5 minutes
        sysRc = WaitForMultipleObjects(2, handleArr, FALSE, 300000);
        if (sysRc == WAIT_TIMEOUT) {
            // Timeout, just exit ...
            return 0;
        } else if (sysRc == WAIT_OBJECT_0) { // HW Event
            processHwEvent();
        } else if (sysRc == WAIT_OBJECT_0 + 1) { // Keyboard event
            ReadFile(handleArr[1], &readChar, 1, &nrRead, 0);
            exitFlag = processCommand(boardNo, readChar);
        }
    } while (!exitFlag);
}
} // main

```

```

void processHwEvent()
{
    ThorRc devRc;
    static IoctlDrvReadReturnT drvReadReturns; // Return data from drvRead()

    // Check for messages:
    do { // Keep reading as long as we have messages
        devRc = DeviceIoControl(drvHandle, IOCTL_DRV_READ, &bufSize,
                               sizeof(bufSize), &drvReadReturns, sizeof(drvReadReturns), &nBytes, 0);
        if (drvReadReturns.rc != THOR_NO_FRAMES) {
            // A frame (hdlc message, status message, or DTMF digit
            // Received, process
            :
        }
    } while (drvReadReturns.rc != THOR_NO_FRAMES);
}

```



```
int processCommand(char cmd)
{
    switch (cmd) {
        case 'q':
            // Quit program:
            return 1;
            break;
        case 't':
            // Send messages:
            IOCTL_HDLC_SendDataT hdlcSendDataS;
            :
            devRc = DeviceIoControl(vxdHandle, IOCTL_HDLC_SEND_DATA,
                                    &hdlcSendDataS, sizeof(hdlcSendDataS), &thorRc,
                                    sizeof(thorRc), &nBytes, 0);
            break;
    }
    return 0;
}
```



8. High-Level API Function Calling Sequence Example

While most of the Thor-2 functions can be called at any time and in any order, a recommended calling sequence for the initialization of the driver exists. An example of a working calling sequence for the High-Level API functions is described in the following:

```
// Thor-2 Application using the High-Level API: Calling Sequence example

void main()
{
    ThorRc thorRc;

    // Initialize the driver:
    // -----
    thorRc = thorConstructDriver(...);
    if ( thorRc != THOR_SUCCESS) {
        // Error
    }
    :

    // Configure the Line Interfaces:
    // -----
    thorRc = thorConfigureLi(...);
    thorRc = thorConfigureLi(...);

    :
    // Configure the HDLC pipes:
    // -----
    thorRc = thorConfigurePipe(...);
    :

    // Create Time-Space Switch Connections:
    // -----
    thorRc = thorConnectChannel(...);
    :

    // Register the callback function for Driver events
    // -----
    thorRc = thorRegisterCallback(callbackFunction));

    // Main Routine:
    // -----
```



```

// Get a handle for Standard Input
hStdin = GetStdHandle(STD_INPUT_HANDLE);
do {
    // go to sleep (waiting for Keyboard event or callback)
    sysRc = WaitForSingleObject(hStdin, 300000);

    // Read and process the usable character
    ReadFile(hStdin, &readChar, 1, &nrRead, 0);
    exitFlag = processCommand(bNo, readChar);
} while (exitFlag);

// Cleanup the driver:
// -----
thorRc = thorDestructDriver();
} // main

void callbackFunction()
{
    ThorRc thorRc;
    do { // Keep reading as long as we have messages in the FIFO
        thorRc = thorRead(...);
        if (thorRc != THOR_NO_FRAMES) {
            // A frame (hdlc message, status message, or DTMF digit
            // Received, process
            :
        }
    } while (thorRc != THOR_NO_FRAMES);
}

int processCommand(char cmd)
{
    switch (cmd) {
        case 'q':
            // Quit program:
            return 1;
            break;
        case 't':
            thorWritePipe();
            break;
    }
    return 0;
}

```



}





9. Thor Driver Example Applications

9.1 Low-Level API Application: *LAPIAPP.EXE*

The *LAPIAPP.EXE* example program demonstrates the use of the Low Level API in an application for sending and receiving HDLC frames on one time-slot. The Application sets up (constructs) the driver, configures the two Line interfaces, and defines one pipe for each Line Interface (LI). After the configuration has been completed, the application enters in to the main loop where it polls for keystrokes or received messages. If key ‘t’ is pressed, the application will send a message on Pipe 1. If the LIs are looped together with the Thor-2 Li Loop Cable, the message sent on Pipe 1 (Li 0) will be received on Pipe 2 (on Li1). The idleFunction() will pick up the received message and display it to the screen. Help can be displayed by pressing ‘?’.

9.2 System API Application: *SAPIAPP.EXE*

The *SAPIAPP.EXE* implements the same functionality as the *LAPIAPP.EXE* but uses the Thor System API. Note: with the System API the application communicates directly with the Thor-2 Virtual Device Driver, and no libraries need to be linked with the application.

9.3 High-Level API Application: *HAPIAPP.EXE*

The *HAPIAPP.EXE* implements the same functionality as the *LAPIAPP.EXE* but uses the Thor High-Level API.

9.4 Application for Sending and Receiving Raw Data: *DATAAPP.EXE*

The *DATAAPP.EXE* example program demonstrates the Thor board’s capabilities to send and receive data transparently (without any HDLC framing). The data from an input file is sent out on Pipe 1 (which is connected to Li0) in four channels configured as a 256 kbit/s data stream (4x64kbit/s timeslots). If the Li0 and Li1 are looped together with the Thor-2 Li Loop cable, the Pipe 2 (which is connected to Li1) will consequently receive the same 256 kbit/s data stream and store the data in a temporary file.

Since these pipes are configured in the transparent mode TMA (for more information on the transparent modes, please refer to the Thor-2 Technical Description) they continuously receive data if the receiver is active. The idle pattern is 0xFF which is transmitted and received in the absence of actual data. To separate the actual data from the idle data, the data to be send are enclosed with signatures. The function removeSignature() reads the temporary file that contains the entire data stream, extracts the actual data between the signatures, and copies it to the final output file.



9.5 Application for Sending and Receiving Data Patterns: PATAPP.EXE

The idea behind the PATAPP.EXE demo application is to demonstrate the ability to continuously send data on maximum number of time-slots. This application sends and receives data on 31 time-slots to achieve a full E1 utilization. Difference piece of data is copied to the on-board memory for each 31 time-slots. Once the data is in-the memory, it will be send continuously over and over again. If the access 0 is looped to access 1 with the Li loop cable, the data will be received and downloaded to the Host PC. The Host CPU will also compare on real-time that the received data matches the sent data. If any discrepancies are found, the program will stop and report the error.

9.6 Demo of T1 Functions: T1APP.EXE

The T1APP.EXE demo implements the functionality of LAPIAPP and SAPIAPP. In addition it demonstrates how the Thor-2 card can be used to handle Bit-Robbed signaling in the T1 mode.

9.7 Demo of E1 Functions: E1APP.EXE

The E1APP.EXE demo implements the functionality of LAPIAPP and SAPIAPP. In addition it demonstrates how the Thor-2 card can be used to access the S_i and S_a bits in the E1 mode.

9.8 Demo of Phone Functions: PHONEAPP.EXE

The PHONEAPP.EXE demo illustrates how the Thor-2 Codecs can be used to create a speech connection between the two Line Interfaces (LIs). It also demonstrates how DTMF tones can be send out from one LI and received and detected on the other.

9.9 Sending and Receiving of HDLC Frames on Multiple Pipes: PERFAPP.EXE

The PERFAPP.EXE demo shows the Thor-2 boards capability to send and receive HDLC frames on multiple channels (pipes) simultaneously.

9.10 Checking the Status of the installed driver and boards: STATUSAPP.EXE

The STATUSAPP.EXE demo program shows an example how to check the status of the installed driver and the installed Thor-2 boards.

9.11 Demo of Thor-2's Audio functions: AUDIOAPP.EXE

The AUDIOAPP.EXE demonstrates Thor-2's audio capabilities and the use of hdlcMemoryXXXX() API functions.



9.12 Demo of Thor-2's SS#7 Support: SS7APP.EXE

The SS7APP.EXE demonstrates Thor-2 drivers SS#7 support and the use of hdlcSS7XXXXX() API functions.





10. Common API Macro, Constant, and Type Definitions

10.1 Odin TeleSystems' Standard Definitions - *otsdef.h*

10.1.1 Standard Type Names

Synopsis

Odin TeleSystems utilizes standardized names for basic data types: Byte is 8 bits, Word is 16 bits, and Double-Word is 32 bits.

Definition

```
typedef unsigned char   Uchar;
typedef unsigned char   Byte;
typedef unsigned int    Uint;
typedef unsigned short  Ushort;
typedef unsigned short  Word;
typedef unsigned long   Dword;
typedef unsigned long   Ulong;
```



10.2 Thor Specific Definitions - *thordef.h*

10.2.1 Board Definitions

Synopsis

The Thor-2 board has a unique identification code THOR_BOARD_TYPE. The driver supports upto BOARD_PER_PC number of Thor-2 boards withing one PC. One Thor-2 board contains THOR LIABILITY PER BOARD Line Interface transceivers, THOR_CD_PER_BOARD Codecs, and THOR_DTMF_PER_BOARD Dtmf Transceivers.

Definition

```
#define THOR_BOARD_TYPE 106 // A unique code for Thor-2
#ifndef THOR_LITE
#define BOARD_PER_PC 1 // Per unit (PC) (1 counting)
#else
#define BOARD_PER_PC 4 // Per unit (PC) (1 counting)
#endif
#define THOR LIABILITY PER BOARD 2 // Line Interfaces per board (1 counting)
#define THOR_CD_PER_BOARD 2 // Codecs per board (1 counting)
#define THOR_DTMF_PER_BOARD 2 // DTMF Transceivers per board (1 counting)
```

10.2.2 Highway Definitions

Synopsis

All the Thor-2 internal highways are 2.048 MBits/s consisting of 32 64KBit/s time-slots. On the AUX highway the Codec #0 is connected to time-slot #2, and Codec #1 to time-slot #3.

Definition

```
#define THOR_NO_OF_HIGHWAY_CHANNELS 32 // Number of channels in an
// internal Thor highway
#define THOR_AUX_CD0_CH 2 // The channel for Codec 0
// on the Auxiliary PCM highway
#define THOR_AUX_CD1_CH 3 // The channel for Codec 1
// on the Auxiliary PCM highway
```



10.2.3 Internal Data Highways - *ThorPhwType*

Synopsis

The highway type is used to identify the Thor-2 internal highway. On Thor-2 a highway is always a 2.048 Mbit/s bi-directional bit stream. One highway consists of 32 channels (8-bit time-slots), each having a data rate of 64 Kbit/s. All together, the Thor-2 board contains 12 separate internal highways and 384 channels.

Definition

```
typedef enum {
    THOR_PHW_MVIP0 = 0,          // MVIP0 PCM highway
    THOR_PHW_MVIP1 = 1,          // MVIP1 PCM highway
    THOR_PHW_MVIP2 = 2,          // MVIP2 PCM highway
    THOR_PHW_MVIP3 = 3,          // MVIP3 PCM highway
    THOR_PHW_MVIP4 = 4,          // MVIP4 PCM highway
    THOR_PHW_MVIP5 = 5,          // MVIP5 PCM highway
    THOR_PHW_MVIP6 = 6,          // MVIP6 PCM highway
    THOR_PHW_MVIP7 = 7,          // MVIP7 PCM highway
    THOR_PHW_LI0 = 8,            // Li0 PCM highway
    THOR_PHW_LI1 = 9,            // Li1 PCM highway
    THOR_PHW_CTRL = 10,          // HDLC Controller PCM highway
    THOR_PHW_AUX = 11,           // Codec/DTMF PCM highway
    THOR_PHW_UNDEF
} ThorPhwType;
```

See Also

```
tssXConnect()
IOCTL_TSS_XCONNECT
tssConstByte()
IOCTL_TSS_CONST_BYTE
```

10.2.4 Clock Source - *ThorClkSrcType*

Synopsis

All the Thor-2 internal highways are clocked with one single clock source. Clocking for the Thor-2 board can be derived from the sources defined by ThorClkSrcType.

Definition

```
typedef enum {
    THOR_CLK_INTERNAL,          // Internal oscillator on the board
    THOR_CLK_MVIP_MASTER_CLK,   // Synchronized to MVIP signal C4\
```



```

THOR_CLK_MVIP_SEC_CLK,      // Synchronized to MVIP secondary clock
THOR_CLK_FA0,              // Synchronized to Falc 0 incoming span
THOR_CLK_FA1,              // Synchronized to Falc 1 incoming span
THOR_CLK_EXTERNAL_8K,       // Synchronized to external 8kHz
THOR_CLK_EXTERNAL_2M        // Synchronized to external 2MHz
} ThorClkSrcType;

```

See Also

```

drvSetClkSrc()
IOCTL_DRV_SET_CLK_SRC

```

10.2.5 CPU Interrupt Mask - **THOR_CIM_XXX**

Synopsis

The CPU Interrupt Mask (CIM) register can be used to mask interrupts from the Thor-2 devices towards the Host CPU. Clearing the register masks all the device interrupts and setting the register enables them. The macros for the CIM register bits are defined as follows:

Definition

#define THOR_CIM_MUN	0x01	// Mask interrupts from HDLC Controller
#define THOR_CIM_FA0	0x02	// Mask interrupts from Line Interface #0
#define THOR_CIM_FA1	0x04	// Mask interrupts from Line Interface #1
#define THOR_CIM_FMI	0x08	// Mask interrupts from Time-Space Switch
#define THOR_CIM_DTO	0x10	// Mask interrupts from DTMF Transceiver #0
#define THOR_CIM_DT1	0x20	// Mask interrupts from DTMF Transceiver #1
#define THOR_CIM_LPU	0x40	// Mask interrupts from On-board Processor

See Also

```

drvEnableCpuIntr()
drvDisableCpuIntr()
THOR_LIM_XXX    // LPU Interrupt Mask

```

10.2.6 LPU Interrupt Mask - **THOR_LIM_XXX**

Synopsis

The LPU Interrupt Mask (LIM) register can be used to mask interrupts from the Thor-2 devices towards the LPU. Clearing the register masks all the device interrupts and setting the register enables them. The macros for the LIM register bits are defined as follows:



Definition

```
#define THOR_LIM_CPU      0x01      // Mask interrupts from CPU
#define THOR_LIM_MUN       0x02      // Mask interrupts from HDLC Controller
#define THOR_LIM_FA0        0x04      // Mask interrupts from Line Interface #0
#define THOR_LIM_FA1        0x08      // Mask interrupts from Line Interface #1
#define THOR_LIM_FMI        0x10      // Mask interrupts from Time-Space Switch
#define THOR_LIM_DTO        0x20      // Mask interrupts from DTMF Transceiver #0
#define THOR_LIM_DT1        0x40      // Mask interrupts from DTMF Transceiver #1
```

See Also

```
drvEnableLpuIntr()
drvDisableLpuIntr()
THOR_CIM_XXX    // CPU Interrupt Mask
```

10.2.7 Frame Header - *ThorFrameHeader*

Synopsis

The Thor driver adds a header to each received message. The header includes information like the status of the message, the length of the message, the time when the message was received, and the source of the message. Note that a frame can be any type of message, e.g. an HDLC frame, a status code, or a DTMF digit. The type of message is determined by *fmType* and the source is determined by *fmSrc*.

Definition

```
typedef struct {
    short          boardNo; // Board number of the received message
    ThorSrcType    fmSrc;   // Defines which device or pipe that is
                           // the source of the message.
    ThorFrameType  fmType;  // Type of the received message
    Byte           fmSeqNo; // Sequence number. All the received
                           // messages are assigned a sequence
                           // number by the driver.
                           // Note: Wraps after 256 messages
    Word           fmLength; // Length of the received message..
    Byte           fmStatus; // Status of the received message.
    Byte           hour;    // Time of reception: Hour.
    Byte           min;     // Time of reception: Minute.
    Byte           sec;     // Time of reception: Second.
    Byte           csec;    // Time of reception: Hundreds of second.
} ThorFrameHeader;
```



See Also

drvRead()
IOCTL_DRV_READ
thorRead()

10.2.8 Message Source - *ThorSrcType*

Synopsis

The Message Source Type indicates the source of the message reported to the Driver. A message can be initiated from one of the HDLC Pipes (typically an incoming HDLC frame) or from one of the physical devices on the board (typically a status message). See also *ThorFrameType*.

Definition

```
typedef enum {
    THOR_SRC_PIPE0 = 0,      // Pipe 0
    THOR_SRC_PIPE1 = 1,      // Pipe 1
    // .
    // .
    // .

    THOR_SRC_PIPE31 = 31,    // Pipe 31
    THOR_SRC_CTL = 64,       // HDLC Controller
    THOR_SRC_LI0 = 65,       // Line Interface 0
    THOR_SRC_LI1 = 66,       // Line Interface 1
    THOR_SRC_DT0 = 67,       // DTMF transceiver 0
    THOR_SRC_DT1 = 68,       // DTMF transceiver 1
    THOR_SRC_CD0 = 69,       // Codec 0
    THOR_SRC_CD1 = 70,       // Codec 1
    THOR_SRC_LPU = 71,       // Local Processing Unit (on-board processor)
    THOR_SRC_TSS = 72,       // Time-Space Switch
    THOR_SRC_DRV = 128       // Driver (SW)
} ThorSrcType;
```

See Also

ThorFrameHeader
ThorFrameType



10.2.9 Frame Type - *ThorFrameType*

Synopsis

Indicates the type of the received message. The Thor-2 board passes information to the driver in the form of messages. The messages can be one of three types: an hdlc frame from a hdlc pipe, a status message from a device on the board, or a message indicating a received DTMF tone.

Definition

```
typedef enum {
    THOR_FM_HDLC      = 0,   // HDLC frame from a pipe
                           // (pipeNo is valid)
    THOR_FM_STAT       = 1,   // Status message (1 octet)
                           // from any device on the board
    THOR_FM_DTMF       = 2,   // DTMF tone detected at DTMF chip;
                           // 1 ASCII character
    THOR_FM_BRS        = 3,   // Bit-Robbed Signalling information; 4 bytes; The
                           // 3 Least significant bytes contains bit robbing
                           // information for 24 DS0 channels. In ESF format
                           // this will be data from a complete multiframe
                           // (24 frames). In F12 and F72 formats the data is
                           // extracted every 12 frames. The THOR_FM_BRS is
                           // only being reported if any of the bit robbing
                           // signalling channels have changed since it was
                           // last reported. The most significant byte
                           // (fmBuf[3]) specifies the bit robbing signalling
                           // channel (0=A, 1=B, and so on).
    THOR_FM_SS7_FISU = 4   // An FISU change has been detected on a SS7 receive
                           // pipe 4 Bytes: 3 least significant octets contain
                           // the new FISU
} ThorFrameType;
```

See Also

[ThorFrameHeader](#)
[ThorSrcType](#)



10.2.10 Frame End Codes

Synopsis

Frame End Codes (FECs) are used to indicate the status of the received messages in *ThorFrameHeader*.

Definition

```
#define THOR_FEC_OK      0x00 // Good message (no errors)
#define THOR_FEC_ROF      0x01 // An overflow of the internal buffer
                           // in the HDLC controller has occurred
                           // and data has been lost.
#define THOR_FEC_RA       0x02 // The received frame was aborted by an
                           // flag 0x7F, or by a Receive Abort cmd,
                           // or by a Fast Receive Channel cmd.
#define THOR_FEC_LFD       0x04 // Set if message is longer than the
                           // buffer supplied by the application
                           // program, or if a message longer
                           // than MFL (Maximum Frame Length)
                           // was received.
#define THOR_FEC_NOB       0x08 // Set if the bit content of the received
                           // frame was not divisible by 8.
#define THOR_FEC_CRC0     0x10 // Set if a frame with a CRC error was
                           // detected.
#define THOR_FEC_LOSS      0x20 // Three contiguous frames with errors
                           // in the synchronization pattern
                           // were detected.
#define THOR_FEC_SF        0x40 // A frame of less than 32 bits between
                           // start flag and end flag (or abort
                           // flag) was received.
#define THOR_FEC_OVERFLOW   0x80 // Set if the application is too slow
                           // reading messages from the driver.
                           // Messages are lost.
```

See Also

ThorFrameHeader

10.2.11 Frame Fill Type - *ThorFrameFillType*

Synopsis

The Frame Fill Type is used to indicate what type a fillers are send (all ones of HDLC Flags) between the HDLC frames.



Definition

```
typedef enum {
    THOR_FFT_FLAGS,           // Send HDLC flags between the frames.
    THOR_FFT_ALL_ONES,        // Send ones between frames.
    THOR_NO_FFT
} ThorFrameFillType;
```

10.2.12 Driver Parameters - ThorDriverT

Synopsis

The Thor-2 driver needs certain information to communicate with the Thor-2 board. This information is found in the Windows registry in Windows 95 and Windows NT drivers. For the DOS driver, this information must be provided by the application.

Definition

```
typedef struct {
    short    irq;                  // IRQ used
    short    ioBaseAddr;           // I/O Base Address used
    short    noOfBoards;           // Number of Boards Installed
    Uint     infoBufferSize;       // Size of the message FIFO
    Ulong   memWinOffset[BOARD_PER_PC]; // Memory Window Offset for Board X
    Ulong   memWinSize[BOARD_PER_PC]; // Memory Window Offset for Board X
    Word    ioWinOffset[BOARD_PER_PC]; // I/O Window Offset for Board X
    Word    ioWinSize[BOARD_PER_PC]; // I/O Window Size for Board X
    Ulong   brdDramSize[BOARD_PER_PC]; // DRAM memory installed on board
} ThorDriverT;
```



10.2.13 Return Codes - *ThorRc*

Synopsis

Return Codes are used to return the execution result from the API functions. The Return code can be converted into a corresponding Error message with the *drvThorRc2Str()* or *thorGetErrMsg()* functions.

Definition

```
#define THOR_RC_MAX 89           // Largest possible Return Code
typedef enum {
    THOR_UNDEFINED      = 0,   // The driver does not know what to return
                           // for this request
    THOR_SUCCESS        = 1,   // All OK, no errors.
    THOR_INVALID_BOARD_TYPE = 3, // Supplied Board type is not supported by
                               // by this driver.
    THOR_INVALID_BOARD_NO = 4,   // Driver was supplied a Board number which
                               // is not allowed (should be 0<=NO<=3).
    THOR_INVALID_LI_NO   = 5,   // Driver was supplied a Li number which
                               // is not allowed (should be 0<=NO<=1).
    THOR_FLASH_CONFIG_ERR = 6,  // The Flash memory did not configure correctly
    THOR_INVALID_IRQ_NO   = 7,   // Driver was supplied an IRQ number which
                               // is not allowed (Not supported by
                               // the board)
    THOR_INVALID_ADDR     = 8,   // Driver was supplied an I/O-address which
                               // is not allowed (Not supported by the
                               // Board)
    THOR_NOT_SETUP        = 9,   // Functions has been called without a proper
                               // configuration of the driver.
    THOR_CORRUPT_FPGA_FILE = 10, // The FPGA configuration is corrupt
    THOR_NO_FRAMES         = 11, // No full frames received and ready for
                               // reading.
    THOR_TX_BUSY          = 12,  // Transmitter not ready. Transmission of the
                               // previous frame has not been completed.
    THOR_TIMEOUT           = 13,  // Function timed out before the expected
                               // response was obtained from ISR
    THOR_L1_OK             = 14,  // Physical Layer (L1) is up (synchronous
                               // state).
    THOR_L1_DOWN           = 15,  // Physical Layer (L1) is down,
                               // no connection.
    THOR_BAD_CHIP          = 16,  // Line Interface (FALC54 chip) did not
                               // respond correctly to a command
    THOR_NO_BOARD           = 17,  // No board, or IO base address mismatch
                               // between board and config file
```



```

THOR_DTMF_NO_TONE      = 18, // No tone has been detected by the DTMF chip
THOR_LI_INIT_FAILURE   = 19, // A device on the board failed to configure
THOR_FPGA_FILE_NOT_FOUND = 20, // Could not open the FPGA configuration file
THOR_WRONG_CONTEXT     = 21, // Requested action is not valid in current
                           // context. Maybe the function call sequence
                           // was wrong
THOR_OUT_OF_MEMORY     = 22, // Not enough memory to start the driver
THOR_FPGA_NOT_LOADED   = 23, // FPGAs were not loaded prior to
                           // constructing the driver
THOR_HDLC_AR_BUSY      = 24, // The HDLC controller is already busy with
                           // an Action Request.
THOR_TSS_INVALID_PCM_HW = 25, // The Highway number is not one of the 12 PCM
                           // highways.
THOR_TSS_INVALID_CHANNEL = 26, // The channel number is out of range. Accepted
                           // range is 0 <= channel <= 31.
THOR_TSS_INVALID_TIMING_MODE = 27, // The selected timing mode is not valid
                           // in the current Thor-2 driver.
THOR_MSG_TOO_LONG       = 28, // The message (frame) is too long for the
                           // current driver configuration.
THOR_FLASH_ERASE_ERR    = 29, // The Flash did not erase correctly
THOR_FLASH_WRITE_ERR     = 30, // The Flash did not write correctly
THOR_WRONG_CONFIG_VER    = 31, // Thor-2 was configured using an
                           // incompatible version of T2CONFIG
THOR_FILE_NOT_FOUND     = 32, // Could not open the specified file
THOR_NON_DEFAULT_LI      = 33, // Li reports non default register values
THOR_HDLC_INIT_FAILURE   = 34, // HDLC controller failed to initialize
THOR_INVALID_CODEC_NO    = 35, // Invalid Codec number
THOR_CD_COMM_FAILURE     = 36, // Codec communication failure
THOR_FLASH_BAD_ADDR      = 37, // Invalid Flash Address
THOR_FLASH_BAD_FILE      = 38, // Could not open file
THOR_FLASH_INVALID_SECT_NO = 39, // Invalid Flash sector number
THOR_FLASH_PRG_FAIL      = 40, // Flash programming error
THOR_INVALID_STATE_TRANS = 41, // Invalid state transition requested
THOR_NO_CASE_INTR        = 42, // Timeout waiting for CASE interrupt
THOR_TOO_MANY_PIPES      = 43, // Too many configured pipes
THOR_HDLC_INVALID_TX_STATE = 44, // The pipe is not in a valid transmit state
THOR_HDLC_INVALID_RX_STATE = 45, // The pipe is not in a valid receive state
THOR_DEVICE_OPEN_FAILED   = 46, // Failed to open a driver device
THOR_DEVICE_READ_FAILED   = 47, // Failed to read driver device
THOR_FLASH_TOO_LARGE      = 48, // Data was too large to be loaded into flash
THOR_PIPE_NOT_CONFIGURED = 49, // Referenced pipe has not been configured
THOR_ASSERT_FAILED        = 50, // Internal error. Assert failed
THOR_DRV_CALL_FAILED      = 51, // Call to driver failed
THOR_DRV_NOT_INITIALIZED = 52, // The driver has not been initialized


```



```

THOR_DATA_TOO_LARGE      = 53, // Data size too large for internal buffer
THOR_NO_MAINT_AUTHORIZATION = 54, // No authorization to perform
                                // maintenance functions
THOR_LPU_BOOT_FAILED     = 55, // Local processor failed to boot
THOR_NO_IO_WIN            = 56, // The host I/O window has not been setup
THOR_NO_MEM_WIN           = 57, // The host Memory window has not been setup
THOR_BAD_BOOT_VECTOR      = 58, // Incorrect LPU Boot Vector.
                                // Possibly Corrupt Flash memory
THOR_DTMF_BUSY            = 59, // DTMF tone sending in progress
THOR_INVALID_RETURN_CODE   = 60, // The ThorRc return code itself
                                // is invalid
THOR_INVALID_HOST_IO_OFFSET = 61, // The host I/O offset value is invalid
THOR_INVALID_IO_WIN_SIZE   = 62, // The I/O window size is invalid
THOR_INVALID_HOST_MEM_OFFSET= 63, // The host mem offset value is invalid
THOR_INVALID_MEM_WIN_SIZE  = 64, // The memory Window size is invalid
THOR_LI_INVALID_ALARM_TYPE = 65, // The Provided LI Alarm type is not valid
THOR_LI_INVALID_CLOCK_MODE = 66, // The provided LI clock mode is not a
                                // valid mode
THOR_LI_INVALID_RESYNCR_OPTION = 67, // The provided LI Auto Resynchronization
                                // configuration option is not a valid option
THOR_LI_INVALID_TRANSMIT_LINE_CODE = 68, // The provided LI Transmit line
                                // code is not a valid code
THOR_LI_INVALID_RECEIVE_LINE_CODE = 69, // The provided LI Receive line code
                                // is not a valid code
THOR_LI_INVALID_AIS_DETECTION_OPTION = 70, // The provided LI AIS detection
                                // option is not a valid option
THOR_LI_INVALID_TRANSMIT_FRAME_FORMAT = 71, // The provided LI Transmit Frame
                                // Format is not a valid format
THOR_LI_INVALID_RECEIVE_FRAME_FORMAT = 72, // The provided LI Receive Frame
                                // Format is not a valid format
THOR_LI_INVALID_HDB3_ERROR_OPTION = 73, // The provided LI HDB3 Error
                                // Detection option is not a valid option
THOR_LI_INVALID_REGAIN_MULTI_FRAME_OPTION = 74, // The provided LI Regain
                                // Multi Frame option is not a valid option
THOR_LI_INVALID_REMOTE_ALARM_OPTION = 75, // The provided LI Remote Alarm
                                // option is not a valid option
THOR_LI_INVALID_TRANSMIT_POWER_OPTION = 76, // The provided LI Transmit
                                // Power option is not a valid option
THOR_LI_INVALID_RECEIVE_EQUALIZER_OPTION = 77, // The provided LI Receive
                                // Equalizer option is not a valid option
THOR_LI_INVALID_SIGNALING_MODE = 78, // The provided LI Signaling mode is
                                // not a valid mode
THOR_LI_INVALID_FRAME_FORMAT = 79, // The provided LI Frame Format is
                                // not a valid format

```



```

THOR_LI_INVALID_TRANSMIT_REMOTE_ALARM_FORMAT = 80, // The provided LI
                                                // Transmit Remote Alarm Format is not a valid format
THOR_LI_INVALID_RECEIVE_REMOTE_ALARM_FORMAT = 81, // The provided LI
                                                // Receive Remote Alarm Format is not a valid format
THOR_LI_INVALID_LOOP_TYPE      = 82,   // The provided loop type is not a
                                                // valid type
THOR_HDLC_INVALID_PIPE_NO     = 83,   // Driver was supplied a Pipe number which
                                                // is not allowed (should be 0<=NO<=31).
THOR_LI_INVALID_MODE          = 84,   // The provided LI mode is invalid
THOR_CD_INVALID_TX_GAIN       = 85,   // The provided Codec Transmit (TX) gain
                                                // is invalid
THOR_CD_INVALID_RX_GAIN       = 86,   // The provided Codec Receive (RX) gain
                                                // is invalid
THOR_CD_INVALID_LAW           = 87,   // The provided Codec Coding Law is invalid
THOR_CD_INVALID_CODE          = 88,   // The provided Codec Coding code
                                                // is invalid
THOR_INVALID_DTMF_NO          = 89,   // Invalid DTMF Number
THOR_SIZE_TOO_LARGE           = 90,   // Size too large for internal buffers
THOR_EXTMEM_MOVE_FAILED       = 91,   // Extended Memory Move failed
THOR_SETUP_INCOMPLETE          = 92,   // Setup was not successfully completed
THOR_PIPE_NO_MEM               = 93,   // This pipe can only be controlled from
                                                // the host
THOR_INVALID_CALLBACK_FUNCTION = 94,   // The supplied callback function
                                                // is not a valid function pointer
THOR_CALLBACK_ALREADY_SET      = 95,   // Callback function has already been set
THOR_UNABLE_TO_CREATE_CALLBACK_THREAD = 96, // Creation of a thread for
                                                // the callback failed
THOR_INVALID_DIGIT             = 97,   // Unrecognized Multifrequency tone
THOR_HDLC_NO_DATA              = 98,   // No Allocated Data
THOR_TX_IDLE                   = 99,   // The transmitter is idle. User data
                                                // can be sent
THOR_DATA_ID_FREE              = 100,  // The data ID is free
THOR_DATA_ID_IN_USE             = 101,  // The data ID is currently in use
THOR_WRONG_PIPE_MODE            = 102,  // The pipe is configured to mode not
                                                // compatible with the requested action

} ThorRc;

```

See Also

`drvThorRc2Str()`
`IOCTL_DRV_THOR_RC_2_STR`
`thorGetErrMsg()`



10.2.14 Status Message - *ThorStatusType*

Synopsis

Identification for the Thor status messages. Note that for line interfaces these messages can have a different meaning depending on whether the Line Interfaces (LIs) are configured to E1 or T1 mode. The Status code can be converted into a corresponding status message with the *drvStatus2Str()* function

Definition

```
typedef enum {
    LIS_T8MS_ISF      = 0x00, // E1: receive Timeout 8 MSec
                           // T1: Incorrect Sync Format
    LIS_CASC_RSC      = 0x01, // E1: received CAS information Changed
                           // T1: Received Signalling information Changed
    LIS_CRC4_CRC6     = 0x02, // E1: receive CRC4 error
                           // T1: receive CRC6 error
    LIS_CASE           = 0x03, // E1: -
                           // T1: transmit CAS register Empty
    LIS_RDO            = 0x04, // E1: Receive Data Overflow
                           // T1: Receive Data Overflow
    LIS_XDU            = 0x05, // E1: Transmit Data Underrun
                           // T1: Transmit Data Underrun
    LIS_XLSC           = 0x06, // E1: Transmit Line Status Change
                           // T1: Transmit Line Status Change
    LIS_FAR             = 0x07, // E1: Frame Alignment Recovery
                           // T1: Frame Alignment Recovery
    LIS_LFA             = 0x08, // E1: Loss of Frame Alignment
                           // T1: Loss of Frame Alignment
    LIS_MFAR            = 0x09, // E1: MultiFrame Alignment Recovery
                           // T1: MultiFrame Alignment Recovery
    LIS_T400MS_LMFA   = 0x0A, // E1: receive Timeout 400 MSec
                           // T1: Loss of MultiFrame Alignment
    LIS_AIS             = 0x0B, // E1: Alarm Indication Signal
                           // T1: Alarm Indication Signal
    LIS_LOS             = 0x0C, // E1: Loss Of Signal
                           // T1: Loss Of Signal
    LIS_RAR             = 0x0D, // E1: Remote Alarm Recovery
                           // T1: Remote Alarm Recovery
    LIS_RA              = 0x0E, // E1: Remote Alarm
                           // T1: Remote Alarm
    LIS_LMFA16_XSLP   = 0x0F, // E1: Loss of MultiFrame Alignment ts16
                           // T1: Transmit SLIP indication
    LIS_AIS16_          = 0x10, // E1: Alarm Indication Signal ts16 status change
}
```



```

        // T1: -
LIS_RA16_LLBSCL = 0x11, // E1: Remote Alarm ts16 status change
                  // T1: Line Loop Back Status Change
LIS_API_         = 0x12, // E1: Auxiliary Pattern Indication
                  // T1: -
LIS_SLN          = 0x13, // E1: Slip Negative
                  // T1: Slip Negative
LIS_SLP          = 0x14, // E1: Slip Positive
                  // T1: Slip Positive
LIS_ACTIVE       = 0x15, // E1: physical link ACTIVE indication
                  // T1: physical link ACTIVE indication
LIS_DEACTIVE     = 0x16, // E1: physical link DEACTIVE indication
                  // T1: physical link DEACTIVE indication
LIS_XLS          = 0x17, // E1: Transmit Line Short
                  // T1: Transmit Line Short
LIS_XLO          = 0x18, // E1: Transmit Line Open
                  // T1: Transmit Line Open
LIS_XPR          = 0x19, // Transmit Pool Ready
HDLC_UNKNOWN_INTR = 0x40, // HDLC Unknown interrupt (should not happen)
HDLC_ARF_INTR   = 0x42, // HDLC Action Request Failed
HDLC_ERR_RX_INTR = 0x43, // HDLC Protocol error; Receive direction
HDLC_ERR_TX_INTR = 0x44, // HDLC Host is too slow filling descriptors.
HDLC_FO_INTR    = 0x45, // HDLC Underflow/Overflow. Internal
                  // buffer not available
HDLC_OVERFLOW_INTR = 0x46, // HDLC Interrupt Queue overflow
HDLC_ITF_INTR   = 0x47, // HDLC Idle/Flag change. Changed Interframe
                  // time-fill state
HDLC_SF1_INTR   = 0x48, // HDLC Short Frame Interrupt (7E00 0000 007E
                  // (for CRC32) was detected)
HDLC_SF2_INTR   = 0x49, // HDLC Short Frame
HDLC_IFC_INTR   = 0x4A, // HDLC Interframe timefill character change
HDLC_SF_ERR_INTR = 0x4B, // HDLC Short Frame and Error Indication
HDLC_INVALID_LEN = 0x4C, // HDLC Invalid Message
HDLC_HI_RX_INTR  = 0x4D, // HDLC Host Initiated Interrupt -
                  // Receive direction
HDLC_HI_TX_INTR  = 0x4E, // HDLC Host Initiated Interrupt -
                  // Transmit direction
HDLC_INVALID_PIPE_INTR = 0x4F, // HDLC Interrupt from an unconfigured
                  // pipe
HDLC_HOLD_FAILED = 0x50, // HDLC Failed to put a Tx pipe in hold state
DRV_FIFO_OVERFLOW = 0x80, // Driver Internal FIFO overflow
DRV_END_OF_DRV_STATUS = 0xAF,
LPU_HW_WATCHDOG  = 0xB0, // LPU HW not functioning
LPU_DOS_WATCHDOG = 0xB1, // LPU ROM-DOS crash

```



```
LPU_APP_WATCHDOG = 0xB2, // LPU Application crash  
  
} ThorStatusType;
```

See Also

`drvStatus2Str()`
`IOCTL_DRV_STATUS_2_STR`



10.3 Driver Specific Definitions - *drvdef.h*

10.3.1 Board Configuration Data - *ThorConfigT*

Synopsis

The Board configuration data is stored persistantly in the flash. The information stored is defined with *ThorConfigT*.

Definition

```
typedef struct {
    Word          structVer; // Should be incremented with every change of
                           // this struct
    Word          serialNo; // Serial number of the board. Should
                           // match the data in the GDS.
    short         clkSrc;   // Clock Source
    LiConfigOptionsT li[2]; // Options for Li's (E1 and T1 options)
} ThorConfigT;
```

See Also

```
drvReadConfigData()
IOCTL_DRV_READ_CONFIG_DATA
drvWriteConfigData()
IOCTL_DRV_WRITE_CONFIG_DATA
```

10.3.2 Driver Mode - *DrvModeT*

Synopsis

Specifies the mode the driver is operating. Only Stand-alone (DM_STANDALONE) supported in this driver version.

Definition

```
typedef enum {
    DM_STANDALONE, // This driver is handling everything. There is no
                   // other Thor-2 driver running. Can be used on either LPU or CPU
    DM_LOW_LAYER_LPU, // (LPU only) The LPU is handling the lower protocol
                      // layers (implies that the CPU driver must be
                      // in DM_HIGH_LAYER_CPU mode)
    DM_HIGH_LAYER_CPU, // (CPU only) The CPU is handling the upper
                      // protocol layers (implies that the LPU driver
```



```
// must be in DM_LOW_LAYER_LPU mode)
DM_PARALLEL_LPU, // (LPU only) The LPU driver is handling some
// pipes. The CPU driver is handling some other
// pipes (the tasks are totally independent).
DM_PARALLEL_CPU // (CPU only) The CPU driver is handling some
// pipes. The LPU driver is handling some other pipes
// (the tasks are totally independant).

} DrvModeT;
```



10.4 Line Interface (LI) Specific Definitions - *lidef.h*

10.4.1 Operation Modes - *LiMode*

Synopsis

The operation mode enumerated type is used to indicate whether the Line Interface is configured in T1 or E1 mode.

Definition

```
typedef enum {
    THOR_T1,           // The line interface is configured to operate in T1 mode.
    THOR_E1,           // The line interface is configured to operate in E1 mode.
    THOR_NO_IMODE
} LiMode;
```

10.4.2 Alarm Type - *LiAlarmType*

Synopsis

The Alarm type is used to specify the type of the alarm. Thor-2 can send 3 different alarms towards the remote end: Auxiliary Pattern (AUXP), Alarm Indication Signal (AIS), and Remote Alarm Indication (RAI or Yellow Alarm).

Definition

```
typedef enum {
    LI_AUXP = 0,          // Auxiliary Pattern (AUXP)
    LI_AIS  = 1,           // Alarm Indication Signal (AIS)
    LI_RAI  = 2,           // Remote Alarm Indication (RAI) (E1 only)
    LI_ALARM_SIMULATION = 3, // Initiates internal error simulation of AIS,
                            // loss of signal, loss of synchronization,
                            // auxiliary pattern indication, slip, framing
                            // errors, CRC errors, and code violations.
} LiAlarmType;
```



See Also

10.4.3 Clock mode - LiClkMode

Synopsis

The LiClkMode Type is used to indicate whether the Line Interface is configured to be a clock master or a clock slave.

Definition

```
typedef enum {
    LI_MASTER = 0,
    LI_SLAVE = 1
} LiClkMode;
```

10.4.4 Bit Robbing Data - LiBrData

Synopsis

The LiBrData Type is a parameter to *liSetBitRobData()* which specifies the signaling data (24 bits per signaling channel) to be transmitted next. This is used in CAS_BR (Channel Associated Signaling - Bit Robbing) signaling mode in T1.

The A and B channels are used in frame formats F12, ESF, and F72. The C and D channels are only used in the ESF frame format. The struct holds 24 bits for each channel; The least significant bit is transmitted first (in channel 1, frame 1). This 24 bit value will be repeated unless *liSetBitRobData()* is called again with different values in this struct.

Definition

```
typedef struct {
    Ulong chA;
    Ulong chB;
    Ulong chC; // Only used in ESF format
    Ulong chD; // Only used in ESF format
} LiBrData;
```

See Also

```
liAlarmOn()
IOCTL_LI_ALARM_ON
liAlarmOff()
IOCTL_LI_ALARM_OFF
```



10.4.5 Li Configuration Options - *LiConfigOptionsT*

Synopsis

The Line Interface (LI) configuration options are passed to the *liConfigure()* function to configure the Line Interface for either T1 or E1.

Definition

```
typedef struct {                                // Used as Flash stored config options
    short defaultMode;                         // E1, T1
    LiE1ConfigOptionsT e1;
    LiT1ConfigOptionsT t1;
} LiConfigOptionsT;
```

See Also

```
liConfigure()
IOCTL_LI_CONFIGURE
drvReadConfigData()
IOCTL_DRV_READ_CONFIG_DATA
drvWriteConfigData()
IOCTL_DRV_WRITE_CONFIG_DATA
```

10.4.6 T1 Specific Configuration Options - *LiT1ConfigOptionsT*

Synopsis

The T1 Configuration options are used to configure a line interface (LI) for an T1 link.

Definition

```
// Signalling Modes
typedef enum {
    LI_CCS,      // Common Channel Signalling
    LI_CAS_CC,   // Channel Associated Signalling (Common channel)
    LI_CAS_BR   // Channel Associated Signalling (Bit Robbing)
} LiT1SignallingMode;

// Line Code options for T1
typedef enum {
    LI_T1_AMI = 0, // Must be 0
    LI_T1_B8ZS
} LiT1LineCode;

// Framing options for T1
```



```

typedef enum {
    LI_F12 = 0, // 12-frame multiframe format (F12, D3/4)
    LI_F4 = 1, // 4-frame multiframe format (F4)
    LI_ESF = 2, // 24-frame multiframe format (ESF)
    LI_F72 = 3, // 72-frame multiframe format (F72, remote switch mode)
} LiT1Framing;

// Loss of Frame Alignment sensitivity
typedef enum {
    LI_2_OUT_OF_4 = 0x00, // Values match the Falc register SSC1 bits
                          // and SSC0 bits
    LI_2_OUT_OF_5 = 0x08,
    LI_2_OUT_OF_6 = 0x10,
} LiT1LfaSensitivity;

// Yellow alarm format for T1
typedef enum {
    LI_YELLOW_A = 0, // F12: bit2 = 0 in every channel
                      // ESF: pattern '1111 1111 0000 0000' in data link channel
    LI_YELLOW_B = 1, // F12: FS bit of frame 12
                      // ESF: bit2 = 0 in every channel
} LiT1RemoteAlarmT;

// Li Configuration Options for T1
typedef struct {
    short          signalingMode;
    short          transmitLineCode;
    short          receiveLineCode;
    short          frameFormat;
    short          enableCRC6;
    short          transmitRemoteAlarmFormat;
    short          receiveRemoteAlarmFormat;
    short          autoResynchronization;
    short          lfaSensitivity;
    short          automaticRemoteAlarm;
    Byte           losSensitivity;
    Byte           losRecovery;
    Word           lineLength;
    short          transmitPower;
    short          receiveEqualizer;
    Ulong          clearChannels;
} LiT1ConfigOptionsT;

```



10.4.7 E1 Specific Configuration Options - *LiE1ConfigOptionsT*

Synopsis

The E1 Configuration options are used to configure a line interface (LI) for an E1 link.

Definition

```
// Line code options for E1:  
typedef enum {  
    LI_E1_AMI = 0,           // Must be 0  
    LI_E1_HDB3 = 1  
} LiE1LineCode;  
  
// AIS Alarm Detection Mode for E1:  
typedef enum {  
    LI_AIS_ETS300233 = 0,   // AIS alarm will be detected according to ETS300233  
    LI_AIS_G775 = 1         // AIS alarm will be detected according to CCITT G.775  
} LiE1AisDetectModeT;  
  
// Framing options for E1  
typedef enum {  
    LI_DOUBLE_FRAME = 0,  
    LI_CRC4_MULTIFRAME = 1,  
    LI_CRC4_MULTIFRAME_G706 = 2 // CRC4 Multiframe format with modified CRC4  
                                // Multiframe alignment algorithm (Interworking  
                                // according to CCITT G.706 Annex B)  
} LiE1Framing;  
  
// Li Configuration Options for E1  
typedef struct {  
    short      transmitLineCode;  
    short      receiveLineCode;  
    short      transmitFrameFormat;  
    short      receiveFrameFormat;  
    short      aisDetection;  
    Word       siBits;  
    Word       saBits;  
    short      extendedHDB3errorDetection;  
    short      automaticRegainMultiframe;  
    short      autoResynchronization;  
    short      automaticRemoteAlarm;  
    Byte       losSensitivity;  
    Byte       losRecovery;  
    Word       lineLength;
```



```
    short      transmitPower;
    short      receiveEqualizer;
} LiE1ConfigOptionsT;
```



10.5 HDLC Specific definitions - *hdlcdef.h*

10.5.1 HDLC definitions

```
#define HDLC_TIMESLOTS_MAX           32    // Number of time-slots supported
                                         // by the HDLC Controller
#define HDLC_CHANNELS_MAX            32    // Number of channels (pipes)
                                         // supported by the HDLC Controller
#define HDLC_NO_PATTERNS_MAX         32    // Number of Patterns supported by
                                         // hdlcSendPattern() function
#define HDLC_FRAME_LENGTH_MAX        8191   // Maximum HDLC Frame Length
                                         // supported by the HDLC Controller
```

10.5.2 Pipe Configuration Options - *HdlcPipeOpts*

Synopsis

The HdlcPipeOpts is used to specify the options for the pipes to be configured (see hdlcInitPipe()).

Definition

```
// Pipe configuration options:
typedef struct {
    Byte txFillMask[MUNICH32_TIMESLOT_MAX]; // Array 32 bytes long indicating
                                              // which Tx timeslots (and which bits)
                                              // that should be included in the channel
    Byte rxFillMask[MUNICH32_TIMESLOT_MAX]; // Array 32 bytes long indicating
                                              // which Rx timeslots (and which bits)
                                              // that should be included in the channel
    HdlcPipeMode mode;                      // TMA, TMB, TMR, V110_X30 or HDLC
    ThorFrameFillType frameFillType;        // HDLC mode only
                                              // Character to send between HDLC frames
                                              // THOR_FFT_FLAGS (0x7E) or
                                              // THOR_FFT_ALL_ONES (0xFF)
                                              // All other modes => Use THOR_NO_FFT
    Byte tflag;                            // Transparent Mode Flag (only in TMA mode)
                                              // These 8 bits constitute the fill code for
                                              // flag stuffing and flag filtering. These
                                              // must be set to 0x00 if subchanneling is
                                              // used in TMA.
                                              // Note:
                                              // All other modes => set to 0x00
    HdlcTxRate txRate;                    // Transmission Rate (V.110 and X.30 modes)
                                              // All other modes => use the value TR_NA.
    short interFrameTimeFillNum;          // Minimum No of interframe time-fill chars
```



```

        // (0x7E) between 2 HDLC frames
        // (1=shared flags, 2=non-shared flags)
        // Min value is 1. Max is 1024.
        // Valid for all modes
Bool bitInversion;
        // When TRUE all bits are inverted
        // Valid for all modes
Bool useCrc32;
        // HDLC mode only => TRUE:CRC32, FALSE:CRC16
        // All other modes => Don't care
Bool suppressCrcGen;
        // HDLC mode only => When TRUE the
        // CRC generation in the
        // Transmit direction is suppressed, and
        // the CRC bits are appended to the
        // messages in the receive direction
        // All other modes => set to FALSE
Bool flagAdjustment;
        // HDLC mode: When TRUE the number of
        // interframe time-fill characters is
        // interFrameTimeFillNum - 1 - 1/8*X
        // where X is the number of zero
        // insertions in the frame preceding
        // the interframe time-fill.
        // TMA mode: When TRUE the value tflag is
        // treated a FLAG and it is removed from
        // the rx and tx data streams . When FALSE
        // the pipe runs fully transparent (without
        // framing and without flags)
        // All other modes
} HdlcPipeOpts;

```

TMR mode:

- Transparent transmission/reception with GSM 08.60 frame structure
- Automatic 0x0000 flag generation/detection
- Support for 40, 39.5, and 40.5 octet frames
- Error detection (non octet frame content, short frame, long frame)

For the TMR mode, use the following Pipe options:

pipeOpts.mode	= PM_TMR;
pipeOpts.frameFillType	= THOR_NO_FFT; // 0 required for TMR
pipeOpts.tflag	= 0x00; // N/A for TMR mode; Set to 0x00
pipeOpts.txRate	= TR_NA; // Required for TM mode
pipeOpts.interFrameTimeFillNum	= 10; // Any number 1>=x>=1024 is selectable
pipeOpts.bitInversion	= FALSE; // Could be either TRUE or FALSE
pipeOpts.useCrc32	= FALSE; // N/A for TMR mode; Set to FALSE
pipeOpts.suppressCrcGen	= FALSE; // N/A for TMR mode; Set to FALSE



```
pipeOpts.flagAdjustment = FALSE; // FALSE is required for TMR
```

TMB mode:

- Transparent transmission/reception in frames delimited by 0x00 flags
- Can use shared opening and closing flag if selected
- Flag stuffing, flag detection, flag generation in the abort case
- Error detection (non octet frame content, short frame, long frame)

For the TMB mode, use the following Pipe options:

```
pipeOpts.mode = PM_TMB;
pipeOpts.frameFillType = THOR_NO_FFT; // Required for TMB
pipeOpts.tflag = 0x00; // N/A for TMB mode; Set to 0x00
pipeOpts.txRate = TR_NA; // Required for TM mode
pipeOpts.interFrameTimeFillNum = 10; // Any number 1>=x>=1024 is selectable
pipeOpts.bitInversion = FALSE; // Could be either TRUE or FALSE
pipeOpts.useCrc32 = FALSE; // N/A for TMB mode; Set to FALSE
pipeOpts.suppressCrcGen = FALSE; // N/A for TMB mode; Set to FALSE
pipeOpts.flagAdjustment = FALSE; // FALSE is required for TMB
```

TMA mode:

- Slot synchronous transparent transmission/reception without frame structure
- Bit overwrite with fill/mask flags
- Flag stuffing, flag detection, flag generation in the abort case with programmable flag

For the TMA mode, use the following Pipe options:

```
pipeOpts.mode = PM_TMA;
pipeOpts.frameFillType = THOR_NO_FFT; // Required for TMA
pipeOpts.tflag = 0x00; // Since we flagAdjustment==FALSE,
                      // tflag must be 0x00
pipeOpts.txRate = TR_NA; // Not used in TMA mode
pipeOpts.interFrameTimeFillNum = 4;
pipeOpts.bitInversion = FALSE; // Could be either TRUE or FALSE
pipeOpts.useCrc32 = FALSE; // N/A for TMB mode; Set to FALSE
pipeOpts.suppressCrcGen = FALSE; // N/A for TMB mode; Set to FALSE
pipeOpts.flagAdjustment = FALSE; // Could be either TRUE or FALSE
```

HDLC mode:

- Automatic flag detection and transmission
- Can use shared opening and closing flag if selected



- Detection of interframe-time-fill change, generation of interframe-time-fill 1's or flags.
- Zero bit insertion
- Flag stuffing and flag adjustment for rate adaptation
- CRC generation and checking (16 or 32 bits)
- Error detection (abort, long frame, CRC error, 2 categories of short frames, non-octet frame content)

For the HDLC mode, use the following Pipe options:

```
pipeOpts.mode          = PM_HDLC;
pipeOpts.frameFillType = THOR_FFT_ALL_ONES; // or THOR_FFT_FLAGS
pipeOpts.tflag         = 0x00;   // N/A for HDLC mode; Set to 0x00
pipeOpts.txRate        = TR_NA;  // Not used in HDLC mode
pipeOpts.interFrameTimeFillNum = 2;    // Any number 1>=x>=1024 is selectable
pipeOpts.bitInversion  = FALSE; // Could be either TRUE or FALSE
pipeOpts.useCrc32      = FALSE; // Could be either TRUE or FALSE
pipeOpts.suppressCrcGen = FALSE; // Could be either TRUE or FALSE
pipeOpts.flagAdjustment = FALSE; // Could be either TRUE or FALSE
```

10.5.3 Memory Allocation for Channels - *HdlcBufAllocT*

Synopsis

The *HdlcBufAllocT* specifies how much buffer memory (in Thor-2 on-board DRAM) is allocated for each pipe.

Definition

```
typedef struct {
    Ulong    totalBufSize; // Total receive or transmit buffer size for
                          // this channel.
    Word     bytesPerDescr; // Must be a multiple of 4 and in the
                          // range 4<=x<=8188.
} HdlcBufAllocT;
```

10.5.4 Data Patterns to be sent with *hdlcSendPattern()* - *HdlcDataPatternT*

Synopsis

The *HdlcDataPatternT* is used a parameter to *hdlcSendPattern()*. It specifies what type of pattern that *hdlcSendPattern()* should transmit.



Definition

```
typedef struct {
    Byte *data;           // Pattern (frame) to be sent
    short dataLen;        // Length of the pattern (frame)
    Bool dataEndFlag;    // TRUE if the pattern (frame) should end with a frame end
                         // character. Normally FALSE for TMA mode and TRUE
                         // otherwise.
    short interFrameTimeFillNum; // No of interframe time-fill characters
                                // (0x7E) after this 2 pattern (frame)
                                // (1=shared flags, 2=non-shared flags)
                                // Range: 1 <= x <= 4096
} HdlcDataPatternT;
```



10.6 Flash Specific Defines - *flashdef.h*

10.6.1 Flash Addresses

Definition

```

// Flash Top Address (64M):
#define FLASH_TOP_ADDR    0x3FFFFFFFUL

// Flash Start Address (Top of local memory - 512 KBytes):
#define FLASH_BASE_ADDR   (FLASH_TOP_ADDR - 0x80000UL + 1)

// Location for the boot routine (must be within last 64KBytes of memory)
#define FLASH_BOOT_ADDR   (FLASH_TOP_ADDR - 0x10000UL + 1)

// Location where he LPU starts executing after reset:
#define FLASH_RESET_ADDR  0x3FFFFF0UL

// Flash Sector offsets from FLASH_BASE_ADDRESS
#define FLASH_SA0          0x00000UL      // 0th sector (64KB)
#define FLASH_SA1          0x10000UL      //           (64KB)
#define FLASH_SA2          0x20000UL      //           (64KB)
#define FLASH_SA3          0x30000UL      //           (64KB)
#define FLASH_SA4          0x40000UL      //           (64KB)
#define FLASH_SA5          0x50000UL      //           (64KB)
#define FLASH_SA6          0x60000UL      //           (64KB)
#define FLASH_SA7          0x70000UL      // 7th sector (32KB @ 0x3FF0000)
                                         // LPU Boot strap
#define FLASH_SA8          0x78000UL      // 8th sector (8KB)
#define FLASH_SA9          0x7a000UL      // 9th sector (8KB @ 0x3FFA000)
                                         // Thor configuration data
#define FLASH_SA10         0x7c000UL      // 10th sector (16KB)
                                         // Boot strap addresses @ 0xFFFFFFF0

#define FLSH_MAX_USR_SECT_NO 6      // Highest sector number that the user
                                 // can erase.
#define FLSH_MAX_SECT_NO     10     // Max sector number (0 count)

```

10.6.2 Thor-2 Maintenance Data - *MaintDataT*

Synopsis

The Thor-2 maintenance data contains revision information on the various programmable devices on the board. The Maintenance data can be read by an



application with *flshReadMaintData()* or *IOCTL_FLSH_READ_MAINT_DATA* functions. The data stored in the flash maintenance sector is specified by *MaintDataT*.

Definition

```
typedef struct {  
    // Add more struct members here and change FLASH_MAINT_START_ADDR  
    // Add 4 bytes at a time  
    //  
    // Start maint address 0x3FFFFD4  
    Byte barRev[4];           // Revision of the Bus Arbiter EPLD  
    Byte madRev[4];           // Revision of the Memory Access Device EPLD  
    Byte sadRev[4];           // Revision of the Startup Access Device EPLD  
    Byte ladRev[4];           // Revision of the Local Access Device EPLD  
    Byte rscRev[4];           // Revision of the Reset Controller EPLD  
    Byte lpuBootRev[4];        // Revision of LPUBOOT.ASM  
    Ulong comClkFix;          // WDTOUT#->COMCLK airwire  
    // Address 0x3FFFFF0  
    Byte lpuResVect[12];       // First LPU instruction after a reset  
    // Address 0x3FFFFFC  
    Ulong muResVect;          // Address to the Munich CCS area  
} MaintDataT;
```

See Also

flshReadMaintData()
IOCTL_FLSH_READ_MAINT_DATA



10.7 Codec Specific Definitions - *cddef.h*

10.7.1 Coding Law - *CdLawT*

Synopsis

The *CdLawT* type specifies the different available PCM coding laws.

Definition

```
typedef enum {
    CD_U_LAW,           // North American u-law
    CD_A_LAW            // International A-law
} CdLawT;
```

10.7.2 Code Assignment - *CdCodeT*

Synopsis

The *CdCodeT* specifies the different available code assignment schemes.

Definition

```
typedef enum {
    CD_CCITT_CODE,      // u-law: true sign, inverted magnitude,
                        // a-law: true sign, alternate digit inversion
    CD_SIGN_MAGNITUDE_CODE // sign-magnitude code assignment (independent
                           // of CdLawT)
} CdCodeT;
```

10.7.3 Digital Gain - *CdDigitalGainT*

Synopsis

The *CdDigitalGainT* type is used to specify the amount of gain.

Definition

```
typedef enum {
    CD_MINUS_24_DB = 0,      // -24 dB
    CD_MINUS_21_DB = 1,
    CD_MINUS_18_DB = 2,
    CD_MINUS_15_DB = 3,
    CD_MINUS_12_DB = 4,
    CD_MINUS_9_DB = 5,
```



```
CD_MINUS_6_DB = 6,  
CD_MINUS_3_DB = 7,  
CD_0_DB = 8,  
CD_PLUS_3_DB = 9,  
CD_PLUS_6_DB = 10,  
CD_PLUS_9_DB = 11,  
CD_PLUS_12_DB = 12,  
CD_PLUS_15_DB = 13,  
CD_PLUS_18_DB = 14,  
CD_PLUS_21_DB = 15  
} CdDigitalGainT;
```



10.8 DTMF Specific Definitions - *dtmpdef.h*

10.8.1 DTMF Tone Storage Options - *DtmpOptT*

Synopsis

The *DtmpOptT* type is used specify how the detected DTMF tones will be stored. The options are: Ignore the digits, store only the latest one detected, store all the detected digits in a FIFO.

Definition

```
typedef enum {
    DT_DISABLE,           // No DTMF detection
    DT_DETECT_LAST,       // Detect DTMF tones but store only the last detected digit
    DT_DETECT_STORE        // Detect DTMF tones, and store all detected digits
                           // in the FIFO
} DtmfOptT;
```

See Also

dtmpEnable()
IOCTL_DTMF_ENABLE

10.8.2 Sending Duration - *DtmfDurationT*

Synopsis

The *DtmfDurationT* type is used to specify whether the transmitted tones will be send indefinitely or in bursts.

Definition

```
typedef enum {
    DT_DURATION_INFINITY = 0,   // Send DTMF tone forever
    DT_DURATION_BURST          // 51 ms Burst and Pause duration
} DtDurationT;
```



11. Low-Level API

11.1 Driver functions - *driver.h*

11.1.1 **drvBoardExistence()**

Synopsis

Checks if a Thor-2 board exists at a specified I/O-address.

Definition

```
ThorRc drvBoardExistence(
    short boardNo,           // Board number.
    short aioBaseAddr        // I/O-base address configured with the Dip-switch
);
```

Returns

THOR_SUCCESS	// a THOR-2 board was found
THOR_NO_BOARD	// no THOR-2 board was found
THOR_INVALID_BOARD_NO	// Supplied board number is not valid
THOR_INVALID_ADDR	// Supplied Address is not valid

See Also

`thorBoardExistence()`

11.1.2 **drvCmpMemBlock()**

Synopsis

Compares the contents of a block of on-board memory with a block of host memory.

Definition

```
short drvCmpMemBlock(
    short boardNo,           // Board number
    Ulong lmbAddr,          // On-board Memory Starting Address (flat model) for the
                           // Comparison
    Byte *buf,              // The buffer to be compared with the on-board memory
    Uint count               // Number of bytes to be compared
);
```



Returns

```
== 0      // Buffers are equal
!= 0     // Buffers are different
```

See Also

`drvReadMemBlock()`
`drvWriteMemFill()`
`drvWriteMemBlock()`

11.1.3 **drvDisableCpuIntr()**

Synopsis

Disables Thor-2 device interrupts towards the CPU according to the `cpuIntrMask`. The mask has one bit per device (see Thor-2 Technical Description). A '1' in a mask bit will disable the specific device from interrupting the CPU. A '0' will keep the current value of the mask bit. To enable the interrupts, use `drvEnableCpuIntr()` function.

Definition

```
ThorRc drvDisableCpuIntr(
    short boardNo,           // Board number.
    short cpuIntrMask       // Interrupt Mask
);
```

Returns

```
THOR_SUCCESS          // OK
THOR_INVALID_BOARD_NO // Supplied board number is not valid
```

See Also

`drvEnableCpuIntr()`
`drvEnableLpuIntr()`
`drvDisableLpuIntr()`

11.1.4 **drvDisableLpuIntr()**

Synopsis

Disables interrupts from on-board devices towards the LPU. The mask has one bit per device (see Thor-2 Technical Description). A '1' in a mask bit will disable the specific device from interrupting the LPU. A '0' will keep the current value of the mask bit. To enable the interrupts, use `drvEnableLpuIntr()` function.



Definition

```
ThorRc drvDisableLpuIntr(
    short boardNo,           // Board number.
    short lpuIntrMask       // A '1' in the mask will enable the device
                           // interrupt to the CPU. A '0' will keep the current
                           // value of the bit.
);
```

Returns

```
THOR_SUCCESS          // OK
THOR_INVALID_BOARD_NO // Supplied board number is not valid
```

See Also

```
drvEnableLpuIntr()
drvEnableCpuIntr()
drvDisableCpuIntr()
```

11.1.5 **drvEnableCpuIntr()**

Synopsis

Enables (unmasks) interrupts from on-board devices towards the CPU. The mask has one bit per device (see Thor-2 Technical Description). A '1' in a mask bit will enable the specific device to interrupt the CPU. A '0' will keep the current value of the mask bit. To disable the interrupts, use the *drvDisableCpuIntr()* function.

Definition

```
ThorRc drvEnableCpuIntr(
    short boardNo,           // Board number.
    short cpuIntrMask       // Interrupt Mask
);
```

Returns

```
THOR_SUCCESS          // OK
THOR_INVALID_BOARD_NO // Supplied board number is not valid
```

See Also

```
drvDisableCpuIntr()
drvEnableLpuIntr()
drvDisableLpuIntr()
```



11.1.6 drvEnableLpuIntr()

Synopsis

Enables (unmasks) interrupts from on-board devices towards the LPU. The mask has one bit per device (see Thor-2 Technical Description). A '1' in a mask bit will enable the specific device to interrupt the LPU. A '0' will keep the current value of the mask bit. To disable the interrupts, use the *drvDisableLpuIntr()* function.

Definition

```
ThorRc drvEnableLpuIntr(
    short boardNo,           // Board number.
    short lpuIntrMask       // Interrupt Mask
);
```

Returns

```
THOR_SUCCESS           // OK
THOR_INVALID_BOARD_NO // Supplied board number is not valid
```

See Also

```
drvDisableLpuIntr()
drvEnableCpuIntr()
drvDisableCpuIntr()
```

11.1.7 drvFifoLostMsgs()

Synopsis

Returns the number of lost messages due to driver internal fifo overflow.

Definition

```
ThorRc drvFifoLostMsgs(
    Word *noOfMsgs // OUT PARAMETER: Number of messages
                           // lost due to driver fifo overflow
);
```

Returns

```
THOR_SUCCESS           // OK
```

See Also

```
drvFifoMaxUsage()
drvFifoUsage()
```



drvFifoSize()

11.1.8 drvFifoUsage()

Synopsis

Returns the current usage level (number of messages) of the driver internal fifo.

Definition

```
ThorRc drvFifoUsage(
    Word *noOfMsgs // OUT PARAMETER: Number or messages
                    // currently in the driver fifo
);
```

Returns

THOR_SUCCESS // OK

See Also

drvFifoMaxUsage()
drvFifoLostMsgs()
drvFifoSize()

11.1.9 drvFifoMaxUsage()

Synopsis

Returns the maximum usage level (number of messages) of the driver internal fifo since the last call of this function.

Definition

```
ThorRc drvFifoMaxUsage(
    Word *noOfMsgs // OUT PARAMETER: Max number or messages
                    // in the driver fifo since the last check
);
```

Returns

THOR_SUCCESS // OK

See Also

drvFifoUsage()
drvFifoLostMsgs()
drvFifoSize()



11.1.10 drvFifoSize()

Synopsis

Returns the size of the driver internal fifo.

Definition

```
ThorRc drvFifoSize(
    Word *noOfMsgs // OUT PARAMETER: Size of the Driver internal
                    // message FIFO
);
```

Returns

```
THOR_SUCCESS // OK
```

See Also

```
drvFifoUsage()
drvFifoMaxUsage()
drvFifoLostMsgs()
```

11.1.11 drvFillMem()

Synopsis

Fills a block of the on-board memory (DRAM) with a constant value.

Caveat: Only works for block sizes smaller than the memory window size.

Definition

```
ThorRc drvFillMem(
    short boardNo, // Board number
    Ulong lmbAddr, // Local Memory Bus Address (flat model)
    Word value, // value will be written (Byte)
    Word count // Number of bytes to be written
);
```

Returns

```
THOR_SUCCESS
THOR_DATA_TOO_LARGE // Attempted to fill a memory block that is larger
                    // than the memory window size
THOR_INVALID_BOARD_NO // Supplied board number is not valid
```



See Also

drvWriteMemBlock()

11.1.12 drvFpgaStatus()

Synopsis

Checks if the Field Programmable Gate Arrays (FPGAs) on the Thor-2 board have been configured successfully.

Definition

```
ThorRc drvFpgaStatus(  
    short boardNo           // Board number.  
) ;
```

Returns

THOR_SUCCESS	// the FPGAs are configured
THOR_FPGA_NOT_LOADED	// the FPGAs are not configured
THOR_INVALID_BOARD_NO	// Supplied board number is not valid

11.1.13 drvGetBoardStatus()

Synopsis

Return the status of the specified board.

Definition

```
ThorRc drvGetBoardStatus(  
    short boardNo   // Number of the Thor-2 Board  
) ;
```

Returns

== THOR_SUCCESS	// OK. The board is configured and running.
!= THOR_SUCCESS	// The board is not OK.

See Also

drvGetStatus()



11.1.14 drvGetStatus()

Synopsis

Return the status of the driver in use: DOS Lib, Windows 95 VxD, or Windows NT sys.

Definition

```
ThorRc drvGetStatus(
    void
);
```

Returns

```
== THOR_SUCCESS // OK. The driver is configured and running.  
!= THOR_SUCCESS // The driver is not OK.
```

See Also

`drvGetBoardStatus()`

11.1.15 drvIdent()

Synopsis

Returns the identification string of the Thor-2 driver. The identification number contains the Odin TeleSystems' product number, the driver revision, and the date the driver was compiled.

Definition

```
char *drvIdent(
    void
);
```

Returns

Pointer to a static string containing the driver identification. The string is owned by the LAPI function.

See Also

`thorIdentDriver()`



11.1.16 drvInit()

Synopsis

Connects to the Driver and initializes the Driver internal data structures. In Windows 95 and Windows NT this function needs to be called before any other function is called. In DOS this function needs to be called after drvSetup().

Definition

```
ThorRc drvInit(
    DrvModeT drvMode // Specifies in which mode (and on which target) this
                      // driver is running
);
```

Returns

THOR_SUCCESS	// OK
THOR_OUT_OF_MEMORY	// Not enough memory to create the message FIFO
THOR_DEVICE_OPEN_FAILED	// Unable to connect to the driver
THOR_NO_BOARD	// No Thor-2 Board found

Platforms

ALL

See Also

thorConstructDriver()
drvSetup()

11.1.17 drvInitHdlc()

Synopsis

The *drvInitHdlc()* function performs a hardware reset of the HDLC controller. Initializes the HDLC memory structure.

Definition

```
ThorRc drvInitHdlc(
    short boardNo,           // Board number
    Ulong memSize,          // Total memory on the board (in bytes)
    HdlcBufAllocT txBufAlloc[], // Array of the memory allocation for each
                                // 32 channels (transmit direction)
    HdlcBufAllocT rxBufAlloc[], // Array of the memory allocation for each
                                // 32 channels (receive direction)
```



```

short maxFrameLen           // Max allowed HDLC frame length (only used in HDLC,
                           // TMB and TMR modes)
Ulong *memoryUsed          // Total amount of memory used by the HDLC
                           // controller (output from this function).
);

```

Returns

THOR_SUCCESS	// OK
THOR_OUT_OF_MEMORY	// Not enough on-board memory to setup // the HDLC receive and transmit data structures
THOR_NO_MEM_WIN	// Memory Window has not been setup (DOS). // Call drvSetupMemWin() first.
THOR_HDLC_INIT_FAILURE	// HDLC controller initialization failed
THOR_INVALID_BOARD_NO	// Supplied board number is not valid

See Also

`thorResetHdlc()`

11.1.18 `drvInstallIsr()`

Synopsis

Installs the Thor-2 interrupt service routine for the specified Interrupt (IRQ).

Definition

```

ThorRc drvInstallIsr(
    short aIrq
);

```

Returns

THOR_SUCCESS	// OK
THOR_INVALID_IRQ_NO	// The supplied IRQ number is not valid

Platforms

DOS

See Also

`drvUnInstallIsr()`
`thorConstructDriver()`



11.1.19 drvRead()

Synopsis

Retrieves the next received frame (an HDLC message, a device status message, or a dtmf tone) from the driver receive FIFO. Checks all the boards and all the pipes and devices for available messages.

Note: This function cannot be used with transparent pipes. Use the *drvReadTma()* function instead.

Definition

```
ThorRc drvRead(
    Byte   fmBuf[],           // Buffer into which the received message will
                               // be written. NOTE: The buffer must be
                               // allocated by the application.
    short      fmBufSize,     // Size of fmBuf[].
    ThorFrameHeader *fmHeader // Pointer to header structure that will be
                               // filled in by the function.
                               // NOTE: The struct must be allocated by
                               // the application.
);
```

Returns

THOR_SUCCESS	// A received frame was retrieved successfully
THOR_NO_FRAMES	// No complete frames have been received and // ready to be read.

See Also

[thorRead\(\)](#)
[drvReadTma\(\)](#)
[hdlcWritePipe\(\)](#)

11.1.20 drvReadEx()

Synopsis

Fetch a group of received messages (frame, status code, or dtmf tone) from the driver receive FIFO. Checks all the boards and all the pipes and devices for available messages.

The application passes a number (coFmBuf) of allocated buffers (psqFmData[]) for data and an equal number of allocated ThorFrameHeader (psqFmHeader[]) to the driver in the call to this function.



Note: The driver will directly write the memory space the the psqFmBuf and psqFmHeader is pointing to. This memory can not be paged out during the call to this function.

Definition

```
ThorRc drvReadEx(
    Word    coFmBuf,    // Number of psqFmBuf[] and psqFmHeader[]
                // objects allocated by the application
    Word    cbFmBuf,    // Size of each psqFmBuf[x] buffer.
    Byte   *psqFmBuf,  // Pointer to the first Buffer into which
                    // the received message will
                    // be written. NOTE: The buffer must be
                    // allocated by the application.
    ThorFrameHeader *psqFmHeader, // Pointer to the first header
                    // structure that will be
                    // filled in by the function.
    //NOTE: This array of ThorFrameHeader
    // must be allocated by the application.
    Word     *pcOfmReturned // Number of messages returned in
                    // this call.
                    // NOTE: must be allocated
                    // by the application.
```

Returns

THOR_SUCCESS	// One or more received frames were // retrieved successfully
THOR_NO_FRAMES	// No complete frames have been received and // ready to be read.

See Also

drvRead()
drvReadTma()

11.1.21 drvReadSerialNo()

Synopsis

Reads the serial number of the Thor-2 board.

Definition

```
ThorRc drvReadSerialNo(
    short boardNo,    // Board number to read the serial
                    // number from
```



```
char *serNoStrBuf, // buffer where the driver will
                   // copy the serial number string
short serNoStrBufSize // Size (in number of bytes) of
                      // the serNoStrBuf parameter
);
```

Returns

```
THOR_SUCCESS           // Serial number was successfully
                      // read from the board
```

See Also

-

11.1.22 drvReadTma()

Synopsis

The function *drvReadTma()* fetches data from any transparent pipe if any data is available. The function checks all the boards and all the transparent pipes for received data.

Definition

```
ThorRc drvReadTma(
    Byte fmBuf[],           // Buffer into which the received message will
                           // be written. NOTE: The buffer must be
                           // allocated by the application.
    short fmBufSize,         // Size of fmBuf[].
    ThorFrameHeader *fmHeader // Pointer to header structure that will be
                           // filled in by the function. NOTE: The struct
                           // must be allocated by the application.
);
```

Returns

```
THOR_SUCCESS           // A received frame was retrieved successfully
THOR_NO_FRAMES         // No data has been received and
                      // is ready to be read.
```

See Also

```
thorRead()
drvRead()
hdlcWritePipe()
```



11.1.23 `drvReadConfigData()`

Synopsis

Reads the Thor2 T1/E1 configuration data from the flash.

Note: The calling application must allocate the *ThorConfigT* data structure and pass a pointer to the *drvReadConfigData()* function. The *drvReadConfigData()* function copies the information from the flash memory into the provided the data structure.

Definition

```
ThorRc drvReadConfigData(
    short boardNo,           // Board number
    ThorConfigT *cfgData   // Configuration Data read (Output from this function)
                           // NOTE: ThorConfigT struct must be allocated by the
                           // application
);
```

Returns

THOR_SUCCESS	// OK
THOR_WRONG_CONFIG_VER	// Configuration data has a different revision // than supported by this driver
THOR_INVALID_BOARD_NO	// Supplied board number is not valid

See Also

`drvWriteConfigData()`

11.1.24 `drvReadDriverData()`

Synopsis

Read the driver communications parameters, which are either read from the registry (Windows 95 and Windows NT drivers) or set earlier by the application and stored internally in the driver (DOS driver).

Note: The calling application must allocate the *ThorDriverT* data structure and pass a pointer to the *drvReadDriverData()* function. The *drvReadDriverData()* function copies the information into the provided the data structure.

Definition

```
ThorRc drvReadDriverData(
    ThorDriverT *drvData      // Driver Data read (Output from this function)
);
```



Returns

THOR_SUCCESS // OK

11.1.25 drvReadIo()

Synopsis

Reads a byte (8 bits) from an I/O-port in an on-board device.

Definition

```
short drvReadIo(  
    short boardNo,      // Board number  
    UInt portId        // Local I/O-bus port address to be read  
) ;
```

Returns

The 8-bit (Byte) value of the I/O port.

See Also

drvWriteIo()

11.1.26 drvReadMem()

Synopsis

Reads a Word (16 bits) from an on-board memory (DRAM) location.

Definition

```
Word drvReadMem(  
    short boardNo,      // Board number  
    Ulong lmbAddr       // On-board Memory Address (flat model)  
) ;
```

Returns

The 16-bit (Word) value of the memory location.

See Also

drvReadMem32()
drvWriteMem()



11.1.27 drvReadMem32()

Synopsis

Reads a Double-Word (32 bits) from an on-board memory (DRAM) location.

Definition

```
Ulong drvReadMem32(
    short boardNo,           // Board number
    Ulong lmbAddr           // Local Memory Bus Address (flat model)
);
```

Returns

The 32-bit (Double-Word) value of the memory location.

See Also

`drvReadMem()`
`drvWriteMem()`
`drvWriteMem32()`

11.1.28 drvReadMemBlock()

Synopsis

Copies a block of data from the on-board memory to a buffer in the host memory.

NOTE: This implementation only allows the number of bytes copied (count) to be less than the memory window size.

Definition

```
ThorRc drvReadMemBlock(
    short boardNo,   // Board number
    Ulong lmbAddr,  // On-board Memory Starting Address (flat model)
    Byte *dest,     // Buffer in the host where the block is going to be copied to
                    // NOTE: This buffer must be allocated by the calling
                    //       application.
    Word count      // Number of bytes to be copied
);
```

Returns

`THOR_SUCCESS` // OK
`THOR_DATA_TOO_LARGE` // The buffer is larger than the memory window



```
// size
```

See Also

`drvWriteMemBlock()`

11.1.29 **drvRegisterCallback()**

Synopsis

Register a callback function (implemented by the application) which will be called by the driver upon reception of a message or a hardware/line status change. The use of a callback function allows implementation of event driven applications.

NOTE: Only available with Windows 95 and Windows NT drivers. DOS applications must poll the driver.

Definition

```
ThorRc drvRegisterCallback(  
    void (*lapiCallBack)(void)           // function pointer to the callback function in  
                                         // the application to be called from the driver  
) ;
```

Returns

```
THOR_SUCCESS          // OK  
THOR_INVALID_CALLBACK_FUNCTION      // Invalid function pointer  
THOR_CALLBACK_ALREADY_SET          // Callback function can be set only once  
THOR_UNABLE_TO_CREATE_CALLBACK_THREAD // Creation of a new thread failed
```

See Also

`IOCTL_START_EVENT_NOTIFICATIONS`
`thorRegisterCallback()`

11.1.30 **drvResetDevices()**

Synopsis

Resets (provides a pulse on the reset pins) the following Thor-2 devices:

- Line Interfaces (LI0 and LI1)
- Time-Space Switch (TSS)
- HDLC Controller (HDLC)
- Codecs (CD0 and CD1)



Definition

```
ThorRc drvResetDevices(
    short boardNo           // Number of the board whose devices to reset
);
```

Returns

THOR_SUCCESS	// OK
THOR_INVALID_BOARD_NO	// Supplied board number is not valid

See Also

`drvResetDriver()`
`thorResetDriver()`

11.1.31 **drvResetDriver()**

Synopsis

Resets the Driver software. Clears and re-initializes the internal data structures.

Definition

```
ThorRc drvResetDriver(
    void
);
```

Returns

THOR_SUCCESS	// OK
--------------	-------

See Also

`thorResetDriver()`
`drvResetDevices()`

11.1.32 **drvSetClkSrc()**

Synopsis

Sets the clock source for the Thor-2 board. All the internal data highways are synchronized and run from the same master clock. The possible clock sources are defined by *ThorClkSrcType*.

Definition

```
ThorRc drvSetClkSrc(
    short boardNo,           // Board number.
```



```
    short clkSrc           // Clock source to be used (ThorClkSrcT)
);
```

Returns

THOR_SUCCESS	// OK
THOR_TSS_INVALID_TIMING_MODE	// The provided Clock Source is not valid // See ThorClkSrcType for valid values
THOR_INVALID_BOARD_NO	// Supplied board number is not valid

11.1.33 drvSetup()

Synopsis

Provides the driver the communications parameters to be used with the Thor-2 board(s). This function only needs to be called in DOS. In Windows 95 and Windows NT the information is available to the driver from the Windows Registry.

Note: The DOS driver can work in polling mode, i.e. without an IRQ. In polling mode the maximum number of pipes that can be configured is 6. To run in polling mode pass aIrq=-1 to this function.

Definition

```
ThorRc drvSetup(
    short aIoBaseAddr,           // I/O-base address
    short aNoOfBoards,          // Number of Boards installed (up to 4).
    short aIrq,                 // IRQ for all the installed THOR boards (-1 for
                                // polling mode)
    Word infoBufferSize         // Size of driver fifo
);
```

Returns

THOR_SUCCESS	// OK
THOR_INVALID_BOARD_NO	// The supplied board number is not valid
THOR_INVALID_IRQ_NO	// The supplied IRQ number is not valid
THOR_INVALID_ADDR	// The supplied I/O-Base address is not valid

Platforms

DOS

See Also

thorConstructDriver()
drvInit()



11.1.34 drvSetupIoWin()

Synopsis

Initializes the sliding I/O window by setting the Host I/O Offset (HIO register) and the host I/O Window Size (IWS register).

With DOS driver this function must be called before any other I/O window functions are called. With Windows 95 and Windows NT drivers, the use of this function is not necessary as the information is available to the driver from the Windows Registry. However, with Windows drivers this function can be used to overwrite the information stored in the registry.

Definition

```
ThorRc drvSetupIoWin(
    short boardNo,           // Board number.
    short aHostIoOffset,     // Absolute starting address for the I/O window
                           // in the host I/O-address space (e.g. 0x290).
    short aHostIoWindowSize // Size (no of bytes) of the I/O-window in the
                           // host I/O address space (4 <= size <= 1kByte).
                           // Typical value 16
);
```

Returns

THOR_SUCCESS	// OK
THOR_INVALID_HOST_IO_OFFSET	// The provided host I/O offset value is invalid
THOR_INVALID_IO_WINDOW_SIZE	// The provided I/O window size is invalid
THOR_INVALID_BOARD_NO	// Supplied board number is not valid

Platforms

DOS

See Also

`drvSetupMemWin()`
`thorConstructDriver()`

11.1.35 drvSetupMemWin()

Synopsis

Initializes the memory window by setting the host memory offset (HMO register) and the host memory window size (MWS register).



With DOS driver this function must be called before any memory window functions are called. In Windows 95 and Windows NT use of this function is not necessary as the information is available to the driver from the Windows Registry. However, with Windows drivers this function can be used to overwrite the information stored in the registry.

Definition

```
ThorRc drvSetupMemWin(
    short boardNo,                      // Board number.
    Ulong aHostMemoryOffset,             // Absolute starting addresses of the memory
                                         // in the host memory address space
                                         // (e.g. 0x0D0000).
    Ulong aHostMemoryWindowSize        // Size (no of bytes) of the memory window
                                         // in the host memory address space
                                         // (256 <= size <= 16MByte). Typical values:
                                         // 16kBytes, 32kBytes, or 64kBytes.
);

```

Returns

THOR_SUCCESS	// OK
THOR_INVALID_HOST_MEM_OFFSET	// The provided host memory offset // value is invalid
THOR_INVALID_MEM_WINDOW_SIZE	// The provided memory window size is invalid
THOR_INVALID_BOARD_NO	// Supplied board number is not valid

Platforms

DOS

See Also

drvSetupIoWin()
thorConstructDriver()

11.1.36 drvStatus2Str()

Synopsis

Converts a status code to a string. Returns a pointer to a string describing the status code in a general fashion. Can be used for “quick and dirty” solutions when the status code is not analyzed properly by the application, but at least something needs to be displayed to the user.

**Definition**

```
char *drvStatus2Str(
    short boardNo,           // Number of the Thor-2 Board
    short liNo,              // Number of the LI reporting the status
    ThorStatusType statusCode // The status code
);
```

Returns

Pointer to a static string owned by the function.

See Also

`drvThorRc2Str()`
`thorGetErrMsg()`

11.1.37 `drvThorRc2Str()`**Synopsis**

Converts a *ThorRc* return code to a string. Returns a pointer to a string describing the error code in a general fashion. Can be used for “quick and dirty” solutions when the return code is not analyzed properly by the application, but at least something needs to be displayed to the user.

Definition

```
char *drvThorRc2Str(
    ThorRc errCode           // ThorRc return code to be converted.
);
```

Returns

Pointer to a static string owned by the function.

See Also

`thorGetErrMsg()`
`drvStatus2Str()`

11.1.38 `drvUnInstallIsr()`**Synopsis**

Uninstalls the Thor-2 interrupt service routine.



Definition

```
ThorRc drvUnInstallIsr()  
    void  
);
```

Returns

THOR_SUCCESS

Platforms

DOS

See Also

drvInstallIsr()
thorDestructDriver()

11.1.39 drvWriteConfigData()

Synopsis

Stores the Thor-2 T1/E1 configuration data persistently into the on-board flash memory.

Definition

```
ThorRc drvWriteConfigData(  
    short boardNo,           // Board number  
    ThorConfigT *cfgData   // Configuration data to be written  
);
```

Returns

THOR_SUCCESS // OK
THOR_FLASH_ERASE_ERR // Failed to erase the Flash Sector
THOR_FLASH_WRITE_ERR // Write to the flash failed
THOR_FLASH_CONFIG_ERR // Configuration did not complete successfully
THOR_INVALID_BOARD_NO // Supplied board number is not valid

See Also

drvReadConfigData()



11.1.40 drvWriteIo()

Synopsis

Writes a byte (8 bits) to an I/O-port in an on-board device.

Definition

```
ThorRc drvWriteIo(
    short boardNo,           // Board number
    UInt portId,            // On-board I/O-port address
    UInt value               // Byte (8 bit) value to be written
);
```

Returns

THOR_SUCCESS

See Also

drvReadIo()

11.1.41 drvWriteMem()

Synopsis

Writes a Word (16 bits) to the on-board memory (DRAM) location.

Definition

```
ThorRc drvWriteMem(
    short boardNo,           // Board number
    Ulong lmbAddr,           // On-board Memory Address (flat model)
    Word value                // Word (2 bytes) value to be written
);
```

Returns

THOR_SUCCESS

See Also

drvWriteMem8()
drvWriteMem32()
drvReadMem()



11.1.42 drvWriteMem8()

Synopsis

Writes a Byte (8 bits) to the on-board memory (DRAM) location.

Definition

```
ThorRc drvWriteMem8(
    short boardNo,           // Board number
    Ulong lmbAddr,          // On-board Memory Address (flat model)
    Word value              // Byte (8-bit) value to be written
);
```

Returns

THOR_SUCCESS

See Also

drvWriteMem()
drvWriteMem32()

11.1.43 drvWriteMem32()

Synopsis

Writes a Double-Word (32 bits) to the on-board memory (DRAM) location.

Definition

```
ThorRc drvWriteMem32(
    short boardNo,           // Board number
    Ulong lmbAddr,          // Local Memory Bus Address (flat model)
    Ulong value              // Dword (4 bytes) of value will be written
);
```

Returns

THOR_SUCCESS

See Also

drvWriteMem()
drvReadMem32()



11.1.44 drvWriteMemBlock()

Synopsis

Copies a block of data from a buffer in the host memory to the on-board memory.

Definition

```
ThorRc drvWriteMemBlock(  
    short boardNo,           // Board number  
    Ulong lmbAddr,          // On-Board Memory Starting Address (flat model)  
    Byte *src,              // Buffer in the host from where the block  
                           // is going to be copied from  
    Uint count               // Number of bytes to be copied  
) ;
```

Returns

THOR_SUCCESS

See Also

drvReadMemBlock()
drvCmpMemBlock()



11.2 Line Interface Functions - *li.h*

11.2.1 liAlarmOff()

Synopsis

Stops sending a previously initiated alarm towards the remote end.

Definition

```
ThorRc liAlarmOff(
    short boardNo,           // Number of the Thor-2 board hosting the LI
    short liNo,              // Number of the Line Interface to clear the
                           // alarm from.
    LiAlarmType alarmType   // Alarm type to clear
);
```

Returns

THOR_SUCCESS	// OK
THOR_INVALID_ALARM_TYPE	// The provided alarm type is not a valid type
THOR_WRONG_CONTEXT	// The provided alarm type is not available in the // current Li mode
THOR_INVALID_BOARD_NO	// Function was supplied an invalid board number
THOR_INVALID_LI_NO	// Function was supplied an invalid LI number

See Also

`liAlarmOn()`
`thorAlarmOff()`

11.2.2 liAlarmOn()

Synopsis

Initiates the sending of an alarm towards the remote end. The sending of an alarm will continue until turned off with *liAlarmOff()*.

Definition

```
ThorRc liAlarmOn(
    short boardNo,           // Number of the Thor-2 board hosting the LI
    short liNo,              // Number of the Line Interface to send the alarm from
    LiAlarmType alarmType   // Alarm type to send
);
```



Returns

```

THOR_SUCCESS           // OK
THOR_INVALID_ALARM_TYPE // The provided alarm type is not a valid type
THOR_WRONG_CONTEXT     // The provided alarm type is not available in the
                      // current Li mode
THOR_INVALID_BOARD_NO   // Function was supplied an invalid board number
THOR_INVALID_LI_NO      // Function was supplied an invalid LI number

```

See Also

`liAlarmOff()`
`thorAlarmOn()`

11.2.3 liBitRobAccessDisable()

Synopsis

Disables the sending and receiving of bit-robbed signalling data.

NOTE: Only meaningful in T1 mode.

Definition

```

ThorRc liBitRobAccessDisable(
    short      boardNo,          // Number of the Thor-2 board hosting the LI
    short      liNo             // Number of the Line Interface
);

```

Returns

```

THOR_SUCCESS           // OK
THOR_WRONG_CONTEXT     // Bit Rob Data is not available in E1 Mode
THOR_INVALID_BOARD_NO   // Function was supplied an invalid board number
THOR_INVALID_LI_NO      // Function was supplied an invalid LI number

```

See Also

`liBitRobAccessEnable()`
`liSetBitRobData()`

11.2.4 liBitRobAccessEnable()

Synopsis

Enables the user to send and receive bit-robbed signalling data. Bit Robbing can be used in F12, ESF, and F72 frame formats (T1 only). In F12 and F72 there are two signaling channels called A and B. In ESF format there are four signaling channels: A,



B, C, and D. The received signalling data is passed to the user via the *drvRead()* function. See the *ThorFrameType THOR_FM_BRS*. To transmit bit-robbed signaling data, use the function *liSetBitRobData()*.

If a certain time-slot is used for data traffic, it cannot be overwritten with bit-robbing data, and those time slots should be defined as “Clear Channels” (see the Clear-Channel parameter in the T2config configuration file). If a time-slot (channel) is defined as a Clear Channel it will not be overwritten by bit robbing or Zero Code Suppression (ZCS, B7 stuffing).

NOTE: Only meaningful in T1 mode, and in F12, ESF, and F72 frame formats.

Definition

```
ThorRc liBitRobAccessEnable(
    short      boardNo,           // Number of the Thor-2 board hosting the LI
    short      liNo,             // Number of the Line Interface
);
```

Returns

```
THOR_SUCCESS          // OK
THOR_WRONG_CONTEXT   // Bit Rob Data is not available in E1 Mode
THOR_NOT_SETUP        // The LI has not been configured with for a frame
                      // format that supports Bit Robbing
THOR_INVALID_BOARD_NO // Function was supplied an invalid board number
THOR_INVALID_LI_NO    // Function was supplied an invalid LI number
```

See Also

```
liBitRobAccessDisable()
liSetBitRobData()
```

11.2.5 liConfigure()

Synopsis

Initializes one Line Interface Transceiver for E1 or T1 mode. The configuration parameters to be used are passed to the function with the *liConfigOptions* argument. The configuration options to be used can first be read from the flash with the *drvReadConfigData()* function, or can later be stored to the flash memory with the *drvWriteConfigData()* function.

Definition

```
ThorRc liConfigure(
    short boardNo,           // Number of the Thor-2 board hosting the LI
    short liNo,             // Number of the Li chip to be configured.
```



```

LiMode liMode,           // Mode to be configured to: THOR_T1 or THOR_E1.
LiConfigOptionsT *liConfigOptions // Configuration parameters to be used
);

```

Returns

```

THOR_SUCCESS // OK

THOR_LI_INVALID_MODE // The Provide LI mode is not T1 or E1

THOR_LI_INVALID_CLOCK_MODE // The provided LI clock mode is not a valid mode

THOR_LI_INVALID_RESYNCR_OPTION // The provided LI Auto Resynchronization
                                // configuration option is not a valid option

THOR_LI_INVALID_TRANSMIT_LINE_CODE // The provided LI Transmit line code is
                                    // not a valid code

THOR_LI_INVALID_RECEIVE_LINE_CODE // The provided LI Receive line code is not
                                    // a valid code

THOR_LI_INVALID_AIS_DETECTION_OPTION // The provided LI AIS detection option
                                    // is not a valid option

THOR_LI_INVALID_TRANSMIT_FRAME_FORMAT // The provided LI Transmit Frame Format
                                    // is not a valid format

THOR_LI_INVALID_RECEIVE_FRAME_FORMAT // The provided LI Receive Frame Format
                                    // is not a valid format

THOR_LI_INVALID_HDB3_ERROR_OPTION // The provided LI HDB3 Error Detection
                                    // option is not a valid option

THOR_LI_INVALID_REGAIN_MULTI_FRAME_OPTION // The provided LI Regain Multi
                                         // Frame option is not a valid option

THOR_LI_INVALID_REMOTE_ALARM_OPTION // The provided LI Remote Alarm option is
                                    // not a valid option

THOR_LI_INVALID_TRANSMIT_POWER_OPTION // The provided LI Transmit Power option
                                    // is not a valid option

THOR_LI_INVALID_RECEIVE_EQUALIZER_OPTION // The provided LI Receive Equalizer
                                         // option is not a valid option

THOR_LI_INVALID_SIGNALING_MODE // The provided LI Signaling mode is not a
                               // valid mode

THOR_LI_INVALID_FRAME_FORMAT // The provided LI Frame Format is not a valid
                            // format

THOR_LI_INVALID_TRANSMIT_REMOTE_ALARM_FORMAT // The provided LI Transmit
                                         // Remote Alarm Format is not a valid format

THOR_LI_INVALID_RECEIVE_REMOTE_ALARM_FORMAT // The provided LI Receive Remote
                                         // Alarm Format is not a valid format

THOR_INVALID_BOARD_NO // Function was supplied an invalid board number

THOR_INVALID_LI_NO // Function was supplied an invalid LI number

```

See Also

`drvReadConfigData()`
`drvWriteConfigData()`



```
thorConfigureLi()
```

11.2.6 liExistenceChk()

Synopsis

Attempts to reads certain registers in the line interfaces and verifies that they contain the default values. The registers should contain the default values after reset. This function can be used to test if a board is present or to test that the Line Interface transceiver circuits are functional.

Definition

```
ThorRc liExistenceChk (
    short boardNo,           // Board number
    short liNo               // LI number
);
```

Returns

```
THOR_SUCCESS                // The registers contain the default values
THOR_NON_DEFAULT_LI          // Non default values read. Either there is
                            // no Thor-2 board present or the LIs are
                            // not functioning properly.
THOR_INVALID_BOARD_NO        // Function was supplied an invalid board number
THOR_INVALID_LI_NO            // Function was supplied an invalid LI number
```

See Also

```
thorBoardExistence()
drvBoardExistence()
```

11.2.7 liForceResynch()

Synopsis

Initiates the resynchronization procedure of the pulse frame and the CRC-multiframe starting directly after the old framing candidate.

Definition

```
ThorRc liForceResynch(
    short boardNo,           // Number of the Thor-2 board hosting the LI
    short liNo                // Number of the Line Interface
);
```



Returns

THOR_SUCCESS

11.2.8 liGetBitRobData()

Synopsis

Get the current received bit rob signalling information.

NOTE: Only meaningful in T1 mode

Definition

```
ThorRc liGetBitRobData(
    short boardNo,      // Number of the Thor-2 board
                        // hosting the LI
    short liNo,        // Number of the Line Interface
    LiBrData *brData  // Received Bit-robbed signalling data
);
```

Returns

THOR_SUCCESS	// OK
THOR_WRONG_CONTEXT	// Bit Rob Signalling is only // available in T1 mode and in ESF, // F12 (D3/4), and F72 frame formats
THOR_NOT_SETUP	// The LI has not been configured with // for a frame format that supports // Bit Robbing
THOR_INVALID_BOARD_NO	// Function was supplied an // invalid board number
THOR_INVALID_LI_NO	// Function was supplied an // invalid LI number

See Also

liSetBitRobData()

11.2.9 liGetSaBitValue()

Synopsis

Retrieves the value to of the received SaX bits. Returns a byte (8-bits) received during the last CRC-Multiframe in parameter *saVal.

NOTE: Only meaningful in E1 mode



Definition

```
ThorRc liGetSaBitValue(
    short      boardNo,          // Board number.
    short      liNo,             // Number of the Line Interface
    LiSaBit    saBit,            // Sa bit to use
    Byte       *saVal           // Returns last received 8-bits (output from this
                                // function)
);
```

Returns

THOR_SUCCESS	// OK
THOR_WRONG_CONTEXT	// The operation is not available in T1 mode
THOR_INVALID_BOARD_NO	// Function was supplied an invalid board number
THOR_INVALID_LI_NO	// Function was supplied an invalid LI number

See Also

liSetSaBitValue()
liSaBitAccessEnable()
liSaBitAccessDisable()

11.2.10 liGetSiBitValue()

Synopsis

Retrieves the value of the Si bits received during the last frame. In Doubleframe format, these are the first bits of each frame. In CRC-Multiframe format, the Si bit are the first bits of frames 13 and 15. In CRC-Multiframe format these bits are also known as the E-bits of spare bits for international use.

NOTE: Only meaningful in E1 mode

Definition

```
ThorRc liGetSiBitValue(
    short  boardNo,           // Number of the Thor-2 board hosting the LI
    short  liNo,              // Number of the Line Interface
    Byte   *si1Val,            // Value of the FAS Si-bit in doubleframe format
                                // or Si (E) bit in frame 13 in CRC-multiframe format
    Byte   *si2Val             // Value of the service word Si bit in DoubleFrame
                                // format or Si (E) bit in frame 15 in
                                // CRC-multiframe format
);
```

**Returns**

THOR_SUCCESS	// OK
THOR_WRONG_CONTEXT	// The operation is not available in T1 mode
THOR_INVALID_BOARD_NO	// Function was supplied an invalid board number
THOR_INVALID_LI_NO	// Function was supplied an invalid LI number

See Also

`liSetSiBitValue()`

11.2.11 liGetStatus()**Synopsis**

Checks and returns the physical line status of the T1/E1 line interface.

Definition

```
ThorRc liGetStatus(
    short boardNo,           // Board number.
    short liNo               // Number of the Line Interface to be read.
);
```

Returns

THOR_L1_OK	// Physical Layer is up
THOR_L1_DOWN	// Physical Layer is down

See Also

`thorGetStatusLi()`

11.2.12 liLoop()**Synopsis**

Loops the Line Interface receive and transmit lines; I.e. received E1/T1 data will be transmitted back on the transmit pairs.

Definition

```
ThorRc liLoop(
    short boardNo,           // Number of the Thor-2 board hosting the LI
    short liNo,              // Number of the Line Interface
    LiLoopT loopType         // Loop type: Line loop or Remote loop
);
```



Returns

```
THOR_SUCCESS          // OK
THOR_LI_INVALID_LOOP_TYPE // The provided loop type is not valid
THOR_INVALID_BOARD_NO    // Function was supplied an invalid board number
THOR_INVALID_LI_NO      // Function was supplied an invalid LI number
```

See Also

thorLoopLi()

11.2.13 liSaBitAccessDisable()

Synopsis

Disables the sending of the Sa-bit values specified with the *liSetSaBitValue()* function.

NOTE: Only meaningful in E1 mode

Definition

```
ThorRc liSaBitAccessDisable(
    short      boardNo,           // Number of the Thor-2 board hosting the LI
    short      liNo,             // Number of the Line Interface
);
```

Returns

```
THOR_SUCCESS          // OK
THOR_WRONG_CONTEXT    // The operation is not available in T1 mode
```

See Also

liSaBitAccessEnable()
liSetSaBitValue()
liGetSaBitValue()

11.2.14 liSaBitAccessEnable()

Synopsis

Enables the sending the Sa-bit values specified with the *liSetSaBitValue()* function.

NOTE: Only meaningful in E1 mode

Definition

```
ThorRc liSaBitAccessEnable(
```



```

    short      boardNo,           // Number of the Thor-2 board hosting the LI
    short      liNo,             // Number of the Line Interface
);

```

Returns

THOR_SUCCESS	// OK
THOR_WRONG_CONTEXT	// The operation is not available in T1 mode
THOR_INVALID_BOARD_NO	// Function was supplied an invalid board number
THOR_INVALID_LI_NO	// Function was supplied an invalid LI number

See Also

[liSetSaBitValue\(\)](#)
[liGetSaBitValue\(\)](#)
[liSaBitAccessDisable\(\)](#)

11.2.15 liSetBitRobData()

Synopsis

If Bit robbing has been enabled with a successful call to *liBitRobAccessEnable()*, then this function will transmit the bit robbed signaling data passed to this function. The same data will be sent continuously until this function has been called again to change the data. However, when called repeatedly, every data will be sent in at least one frame. If the function is called before the transmitting of the previous data has been transmitted at least once, the function will return THOR_TX_BUSY.

NOTE: Only meaningful in T1 mode.

Definition

```

ThorRc liSetBitRobData(
    short      boardNo,           // Number of the Thor-2 board hosting the LI
    short      liNo,             // Number of the Line Interface
    LiBrData   *brData          // Bit-robbed signalling data to be transmitted
);

```

Returns

THOR_SUCCESS	// OK
THOR_WRONG_CONTEXT	// Bit Rob Signalling is only available in T1 mode
THOR_NOT_SETUP	// The LI has not been configured for a frame
	// format that supports Bit Robbing
THOR_TX_BUSY	// The previously specified data has not yet been
	// transmitted. Try again later
THOR_INVALID_BOARD_NO	// Function was supplied an invalid board number



```
THOR_INVALID_LI_NO           // Function was supplied an invalid LI number
```

See Also

```
liBitRobAccessEnable()  
liBitRobAccessDisable()
```

11.2.16 liSetClkMode()

Synopsis

Sets a Line Interface Transceiver as a Clock Master or a Clock Slave.

Definition

```
ThorRc liSetClkMode (  
    short boardNo,           // Number of the Thor-2 board hosting the LI  
    short liNo,              // Number of the Line Interface  
    LiClkMode clkMode       // Clock Mode  
) ;
```

Returns

```
THOR_SUCCESS                // OK  
THOR_LI_INVALID_CLOCK_MODE // The provided clock mode is not a valid mode
```

11.2.17 liSetSaBitValue()

Synopsis

Sets the value to be sent at the SaX bits. Eight bits to be sent can be specified per Sa-bit. In CRC-Multiframe format, one bit is sent in the corresponding Sa-bit location of time-slot 0 in every other frame (in frames that do not contain frame alignment information). The least significant bit of the saVal byte is sent first in the frame number 1 of the multiframe and the most significant bit of the Byte is sent last in the frame number 15 of the multiframe.

In Doubleframe format one bit of the saVal word is sent in the every other frame starting from the least significant bit.

NOTE: Only meaningful in E1 mode

Definition

```
ThorRc liSetSaBitValue(  
    short      boardNo,           // Number of the Thor-2 board hosting the LI  
    short      liNo,              // Number of the Line Interface
```



```

        LiSaBit    saBit,           // Sa bit to use
        Byte      saVal            // word to be sent. LSB will be sent first.
    );

```

Returns

THOR_SUCCESS	// OK
THOR_WRONG_CONTEXT	// The operation is not available in T1 mode
THOR_INVALID_BOARD_NO	// Function was supplied an invalid board number
THOR_INVALID_LI_NO	// Function was supplied an invalid LI number

See Also

[liGetSaBitValue\(\)](#)
[liSaBitAccessEnable\(\)](#)
[liSaBitAccessDisable\(\)](#)

11.2.18 liSetSiBitValue()

Synopsis

Sets the value to be sent at the Si bit positions. In Doubleframe format, these are the first bits of each frame. In CRC-Multiframe format, the Si bits are the first bits of frames 13 and 15. In CRC-Multiframe format these bits are also known as the E-bits or Spare bits for International use.

NOTE: Only meaningful in E1 mode

Definition

```

ThorRc liSetSiBitValue(
    short  boardNo,          // Number of the Thor-2 board hosting the LI
    short  liNo,             // Number of the Line Interface
    Byte   silVal,           // Value of the FAS Si-bit in doubleframe format
                           // or Si (E) bit in frame 13 in CRC-multiframe format
    Byte   si2Val,           // Value of the service word Si bit in DoubleFrame
                           // format
                           // or Si (E) bit in frame 15 in CRC-multiframe format
);

```

Returns

THOR_SUCCESS	// OK
THOR_WRONG_CONTEXT	// The operation is not available in T1 mode
THOR_INVALID_BOARD_NO	// Function was supplied an invalid board number
THOR_INVALID_LI_NO	// Function was supplied an invalid LI number



See Also

liGetSiBitValue()

11.2.19 liTransmitPinControl()

Synopsis

Enable or Disable (tri-state) the Transmit pair of the Line Interface.

Definition

```
ThorRc liTransmitPinControl(
    short      boardNo,      // Number of the Thor-2 board
                           // hosting the LI
    short      liNo,        // Number of the Line Interface
    short      enable,       // =1 to enable,
                           // =0 to disable (tri-state)
);
```

Returns

```
THOR_SUCCESS           // OK
THOR_INVALID_BOARD_NO // Function was supplied an invalid
                      // board number
THOR_INVALID_LI_NO    // Function was supplied an
                      // invalid LI number
```

See Also

-



11.3 High-Level Data Control Functions - *hdlc.h*

11.3.1 hdlcInitPipe()

Synopsis

Initializes the HDLC Controller. A pipe can contain one time-slot, only certain bits of a time-slot (sub-channel), or several time-slots (super-channel). Each bit that is to be included in the pipe is passed as a bit rate mask (see HdlcPipeOpts). The bit rate mask is an array of 32 bytes, where index 0 is time-slot 0, etc. A ‘1’ in a bit position indicates that the corresponding bit in the time-slot if included in the pipe. A pipe needs to be configured before data or HDLC frames can be received or sent. The initialization of the time-slot assignment and the selected channel is performed in both TX and RX directions.

Definition

```
ThorRc hdlcInitPipe(
    short boardNo,           // Number of the Thor-2 board hosting the HDLC Controller
    short pipeNo,            // Number of the Pipe (channel)
    HdlcPipeOpts *pipeOpts // Configuration options for the pipe
);
```

Returns

THOR_SUCCESS	// OK
THOR_TOO_MANY_PIPES	// The user has attempted to initialize more pipes // than supported in this version
THOR_HDLC_AR_BUSY	// HDLC Controller is BUSY
THOR_INVALID_BOARD_NO	// Function was supplied an invalid Board number
THOR_HDLC_INVALID_PIPE_NO	// Function was supplied an invalid Pipe number

See Also

[thorConfigurePipe\(\)](#)

11.3.2 hdlcSendAbort()

Synopsis

Aborts the currently transmitted frame (if there is one being transmitted). The frame is aborted by:

- 0x7F for HDLC mode
- 0x00 for TMB mode
- 0x0000 for TMR mode
- pipeOpts.tflag for TMA (pipeOpts.flagAdjustment==TRUE)



0xFF for TMA (pipeOpts.flagAdjustment==FALSE)

To resume sending of frames, use the *hdlcSendData()* or *hdlcSendPattern()* functions.

Definition

```
ThorRc hdlcSendAbort(
    short boardNo,      // Number of the Thor-2 board hosting the HDLC Controller
    short pipeNo        // Number of the Pipe (channel)
);
```

Returns

THOR_SUCCESS	// OK
THOR_HDLC_AR_BUSY	// HDLC Controller is BUSY
THOR_HDLC_INVALID_STATE_TRANS	// The pipe is not in a valid state // to perform this action
THOR_INVALID_BOARD_NO	// Function was supplied an invalid Board number
THOR_HDLC_INVALID_PIPE_NO	// Function was supplied an invalid Pipe number

See Also

thorWritePipe()
hdlcSendData()
hdlcSendPattern()

11.3.3 **hdlcSendData()**

Synopsis

Transmits transparent data or HDLC frames over the specified pipe.

Definition

```
ThorRc hdlcSendData(
    short boardNo,      // Number of the Thor-2 board hosting the HDLC Controller
    short pipeNo,        // Number of the Pipe (channel)
    Byte   *data,        // Data to be sent
    Word dataLen,       // Length of the data
    Bool endOfData      // TRUE if a Frame End should be sent after the data
);
```

Returns

THOR_SUCCESS	// OK, message has been successfully sent
THOR_TX_BUSY	// Transmitter not ready. Transmission of the // previous frame has not been completed. // Try again later.



```

THOR_HDLC_MSG_TOO_LONG      // The message (frame) is too long for the
                            // current driver configuration.

THOR_HDLC_INVALID_TX_STATE // The pipe is not in a valid transmit state

THOR_HDLC_INVALID_STATE_TRANS // Function Internal error

THOR_INVALID_BOARD_NO        // Function was supplied an invalid Board number

THOR_HDLC_INVALID_PIPE_NO    // Function was supplied an invalid Pipe number

```

See Also

`thorWritePipe()`
`thorRead()`
`drvRead()`

11.3.4 **hdlcSendPattern()**

Synopsis

Transmits data patterns (which can be HDLC frames or transparent data) continuously over a number of pipes. An array of patterns is passed as a parameter. This function will send each pattern in the array, starting with the first pattern in the array. When the last pattern in the array is sent it will wrap and send the first pattern again. Between each pattern a number of inter-frame time fill characters can be sent (as specified in `HdlcDataPatternT`). To stop sending the pattern, call either the `hdlcSendAbort()` or the `hdlcSendData()` functions.

Definition

```

ThorRc hdlcSendPattern(
    short boardNo,      // Number of the Thor-2 board hosting the HDLC Controller
    short pipeNo,       // Number of the Pipe (channel)
    HdlcDataPatternT patterns[], // Patterns (frames) to be sent
    short noOfPatterns           // Number of elements in the patterns[] array
);

```

Returns

```

THOR_SUCCESS          // Message accepted and is being sent
THOR_TX_BUSY          // Previous message not yet sent completely
                      // Try again later
THOR_HDLC_MSG_TOO_LONG // Message is too long to be sent
THOR_HDLC_INVALID_STATE_TRANS // HDLC Invalid State Transition,
                             // Driver Internal error
THOR_HDLC_AR_BUSY     // HDLC Controller is BUSY,
                      // Driver internal error
THOR_INVALID_BOARD_NO // Function was supplied an invalid Board number
THOR_HDLC_INVALID_PIPE_NO // Function was supplied an invalid Pipe number

```



See Also

```
thorWritePipe()  
thorRead()  
drvRead()  
hdlcSendData()  
hdlcSendAbort()
```

11.3.5 hdlcReceiveOff()

Synopsis

Sets the receiver in the off condition for a configured pipe. When the receiver is turned off the HDLC controller can still receive frames, but they are discarded and not stored in the receive fifo.

Definition

```
ThorRc hdlcReceiveOn(  
    short boardNo,      // Number of the Thor-2 board hosting the HDLC Controller  
    short pipeNo,       // Number of the Pipe (channel)  
) ;
```

Returns

THOR_SUCCESS	// OK
THOR_HDLC_INVALID_RX_STATE	// The Pipe is not in a valid receive state
THOR_HDLC_INVALID_STATE_TRANS	// HDLC Invalid State Transition, // Driver Internal error
THOR_HDLC_AR_BUSY	// HDLC Controller is BUSY, Driver internal error
THOR_INVALID_BOARD_NO	// Function was supplied an invalid Board number
THOR_HDLC_INVALID_PIPE_NO	// Function was supplied an invalid Pipe number

See Also

hdlcReceiveOn()

11.3.6 hdlcReceiveOn()

Synopsis

Turns on the receiver for a configured pipe. The received frames will be stored in the receive fifo.

Definition

```
ThorRc hdlcReceiveOn(
```



```

    short boardNo,      // Number of the Thor-2 board hosting the HDLC Controller
    short pipeNo,       // Number of the Pipe (channel)
);

```

Returns

THOR_SUCCESS	// OK
THOR_HDLC_INVALID_RX_STATE	// The Pipe is not in a valid receive state
THOR_HDLC_INVALID_STATE_TRANS	// HDLC Invalid State Transition, // Driver Internal error
THOR_HDLC_AR_BUSY	// HDLC Controller is BUSY, Driver internal error
THOR_INVALID_BOARD_NO	// Function was supplied an invalid Board number
THOR_HDLC_INVALID_PIPE_NO	// Function was supplied an invalid Pipe number

See Also

`hdhcReceiveOff()`

11.3.7 hdlcMemoryAlloc()

Synopsis

Allocate a blob of on-board memory to be used for sending data. Returns a handle (dataId) to the memory area which can be used to access the memory with other `hdhcMemoryXXXX()` functions. The function also returns the number of memory units (nrBlobs) allocated for the data. The blob size is set with the *maxFrameLen* parameter to the `drvInitHdcl()` function.

Definition

```

ThorRc hdlcMemoryAlloc(
    short boardNo,      // Number of the Thor-2 board hosting the HDLC Controller
    Ulong size,         // Size of memory requested
    short *dataId,      // OUT PARAMETER: Data Identifier for the allocated area
    Word   *nrBlobs     // OUT PARAMETER: Number of data blobs allocated
);

```

Returns

THOR_SUCCESS	// OK
THOR_OUT_OF_MEMORY	// Not enough allocatable memory to complete the // request

See Also

`hdhcMemoryFree()`
`hdhcMemoryWrite()`
`hdhcMemoryRead()`



11.3.8 hdlcMemoryFree()

Synopsis

Release on-board memory identified with the specified handle (dataId)

Definition

```
ThorRc hdlcMemoryFree(
    short boardNo,    // Number of the Thor-2 board hosting the HDLC Controller
    short dataId      // Data Identifier whose data blobs are to be freed
);
```

Returns

THOR_SUCCESS	// OK
THOR_NO_DATA	// No allocated data found for the given Id

See Also

hdlcMemoryAlloc()
hdlcMemoryWrite()
hdlcMemoryRead()

11.3.9 hdlcMemoryWrite()

Synopsis

Writes data into the on-board HDLC memory. Use the dataId and blobNo to identify the memory area to be written. The dataId ties memory blobs together and the HDLC controller will treat data blobs with the same dataId as continuous data. For example, if 24K of raw data is to be sent, one must write the data in to the memory in 3 passes with blob numbers 0, 1, and 2.

Definition

```
ThorRc hdlcMemoryWrite(
    short boardNo,    // Number of the Thor-2 board hosting the HDLC Controller
    short dataId,     // Data Identifier, must be kept track by the application
    Word  blobNo,     // Blob number to be overwritten (0, 1, 2, ...)
    Byte  data[],     // One data blob (max size 8K)
    Word  dataLen     // Length of the data to be loaded
);
```

Returns

THOR_SUCCESS	// OK
--------------	-------



```

THOR_INVALID_BOARD_NO // Provided Board Number is not valid
THOR_SIZE_TOO_LARGE // Data size must be <= 8192 Bytes
THOR_WRONG_CONTEXT // The HDLC controller must be initialized before
// this function can be called so that the HDLC
// memory requirements are known
THOR_OUT_OF_MEMORY // No free memory to load the data to

```

See Also

`hdhcMemoryAlloc()`
`hdhcMemoryFree()`
`hdhcMemoryRead()`

11.3.10 `hdhcMemoryRead()`

Synopsis

Reads data from the on-board HDLC memory corresponding the dataId and the blobNo. Copies the data into user allocated buffer.

Definition

```

ThorRc hdhcMemoryRead(
    short boardNo, // Number of the Thor-2 board hosting the HDLC Controller
    short dataId, // Data Identifier, must be kept track by the application
    Word blobNo, // Data Blob number to be read (0, 1, 2, ...)
    Byte data[], // User allocated buffer for one data blob (max size 8K)
    Word bufLen, // Length of the user buffer (max size 8K)
    Word *dataLen // OUT PARAMETER: Length of the data returned
);

```

Returns

```

THOR_SUCCESS // OK
THOR_INVALID_BOARD_NO // Provided Board Number is not valid
THOR_SIZE_TOO_LARGE // Provided user buffer is not large enough to
// hold all the data
THOR_HDLC_NO_DATA // No data found

```

See Also

`hdhcMemoryWrite()`
`hdhcMemoryAlloc()`
`hdhcMemoryFree()`



11.3.11 hdlcMemoryCheckId()

Synopsis

Checks whether a data ID is free or in use

Definition

```
ThorRc hdlcMemoryCheckId(  
    short boardNo, // Number of the Thor-2 board hosting the HDLC Controller  
    short dataId, // Data ID to be checked  
    Bool *inUse, // OUT PARAMETER: OTS_TRUE if in use, OTS_FALSE if free  
    Word *size, // OUT PARAMETER: Data Size  
    Word *nrBlobs // OUT PARAMETER: Number of data blobs  
) ;
```

Returns

```
THOR_SUCCESS // OK  
THOR_INVALID_BOARD_NO // Provided Board Number is not valid
```

See Also

hdlcMemoryCheckUsage()

11.3.12 hdlcMemoryCheckUsage()

Synopsis

Provides a status of how much allocatable HDLC memory is available and is currently in use.

Definition

```
ThorRc hdlcMemoryCheckUsage(  
    short boardNo, // Number of the Thor-2 board hosting the HDLC Controller  
    Ulong *totalMem, // OUT PARAMETER: Total allocatable HDLC memory  
    Ulong *memInUse, // OUT PARAMETER: HDLC memory currently in use  
    Ulong *memAvailable // OUT PARAMETER: HDLC memory available  
) ;
```

Returns

```
THOR_SUCCESS // OK  
THOR_INVALID_BOARD_NO // Provided Board Number is not valid
```



See Also

`hdlcMemoryCheckId()`

11.3.13 `hdlcMemoryStartIdlePattern()`

Synopsis

Begin sending an idle pattern on the specified pipe. The user must first load two data blobs into the memory using `hdlcMemoryWrite`. One of the data blobs are used for the primary idle pattern and the second one for secondary idle pattern. Upon completion of this function, the HDLC controller will constantly send the primary idle pattern. The user can now send data between the idle patterns using the `hdlcMemorySend()` function. After the data has been send, the HDLC controller will start sending the secondary idle pattern.

Note: Idle pattern can contain only one descriptor and the max data size for the idle pattern is 8K.

Note: The datasize is set with the `maxFrameLen` parameter for `drvInitHdlc()` function.

Definition

```
ThorRc hdlcMemoryStartIdlePattern(
    short boardNo, // Number of the Thor-2 board hosting the HDLC Controller
    short pipeNo, // Number of the Pipe (channel)
    short primaryIdleDataIdx, // Data index for the primary idle pattern
    short secondaryIdleDataIdx, // Data index for the secondary idle pattern
    Bool dataEndFlag, // Set to OTS_TRUE if the pattern (frame) should
                      // end with a frame end (0x7E for HDLC)
    short nrInterFrameTimeFills // No of interframe time-fill characters
                                // (0x7E) after this 2 pattern (frame)
                                // (1=shared flags, 2=non-shared flags)
                                // Range: 1 <= x <= 4096
);

```

Returns

<code>THOR_SUCCESS</code>	// OK
<code>THOR_HDLC_MSG_TOO_LONG</code>	// Message is too long to be sent
<code>THOR_HDLC_INVALID_STATE_TRANS</code>	// HDLC Invalid State Transition, Driver // Internal error
<code>THOR_HDLC_AR_BUSY</code>	// HDLC Controller is BUSY, Driver internal error
<code>THOR_INVALID_BOARD_NO</code>	// Function was supplied an invalid Board number
<code>THOR_HDLC_INVALID_PIPE_NO</code>	// Function was supplied an invalid Pipe number
<code>THOR_HDLC_NO_DATA</code>	// No data found from the specified data index



See Also

hdlcMemorySendData()

11.3.14 hdlcMemorySendData()

Synopsis

Send the data identified with the Id. When called, the HDLC controller will first complete the sending of the current Idle pattern, it will then send the data identified with the Id, after which it will immediately continue sending the idle patterns.

Definition

```
ThorRc hdlcMemorySendData(  
    short boardNo,      // Number of the Thor-2 board hosting the HDLC Controller  
    short pipeNo,       // Number of the Pipe (channel)  
    short dataId        // Data Identifier whose data blobs is to be sent  
) ;
```

Returns

THOR_SUCCESS	// OK
THOR_WRONG_CONTEXT	// Idle sending must be started before this // function can be called
THOR_INVALID_BOARD_NO	// Provided Board Number is not valid
THOR_HDLC_INVALID_PIPE_NO	// Function was supplied an invalid Pipe number
THOR_TX_BUSY	// The sending of the previous data has not been // completed, try again later
THOR_OUT_OF_MEMORY	// Not enough transmit descriptors to send the // data. Allocate more descriptor or increase // the maximum data size.

See Also

hdlcMemorySendDataList()
hdlcMemoryGetSendStatus()
hdlcMemoryStartIdlePattern()

11.3.15 hdlcMemorySendDataList()

Synopsis

Sends a list of data identified with the data Ids. The data to be send must have been loaded to memory earlier. When called, the HDLC controller will first complete the sending of the current Idle pattern, it will then send the data identified with the list of IDs, after which it will immediately continue sending the idle patterns.



Definition

```
ThorRc hdlcMemorySendDataList(
    short boardNo,      // Number of the Thor-2 board hosting the HDLC Controller
    short pipeNo,       // Number of the Pipe (channel)
    short dataId[],    // Array of Data Identifiers whose data blobs are to be sent
    short nrDataIds   // Number of Data Identifiers in the list
);
```

Returns

THOR_SUCCESS	// OK
THOR_WRONG_CONTEXT	// Idle sending must be started before this // function can be called
THOR_INVALID_BOARD_NO	// Provided Board Number is not valid
THOR_HDLC_INVALID_PIPE_NO	// Function was supplied an invalid Pipe number
THOR_TX_BUSY	// The sending of the previous data has not been // completed, try again later
THOR_DATA_TOO_LARGE	// Too many elements in the dataId array

See Also

`hdlcMemorySendData()`
`hdlcMemoryGetSendStatus()`
`hdlcMemoryStartIdlePattern()`

11.3.16 **hdlcMemoryGetSendStatus()**

Synopsis

Send the data identified with the Id. When called, the HDLC controller will first complete the sending of the current Idle pattern, it will then send the data identified with the Id, after which it will immediately continue sending the idle patterns.

Definition

```
ThorRc hdlcMemoryGetSendStatus(
    short boardNo,      // Number of the Thor-2 board hosting the HDLC Controller
    short pipeNo,       // Number of the Pipe (channel)
);
```

Returns

THOR_TX_IDLE	// HDLC controller is sending IDLE pattern // on this pipe. User Data can be sent
THOR_TX_BUSY	// HDLC controller is currently busy sending // user data on this pipe. Try again later
THOR_INVALID_BOARD_NO	// Provided Board Number is not valid



```
THOR_HDLC_INVALID_PIPE_NO // Function was supplied an invalid Pipe number
```

See Also

`hdhcMemorySendData()`
`hdhcMemorySendDataList()`

11.3.17 **hdhcSS7SetFisu()**

Synopsis

Sets the Signalling System #7 (SS#7) Fill-In Signalling Unit (FISU) to be sent on the specified pipe. When this function is called for the first time after *hdhcInitPipe()*, begins sending the specified FISU. If a FISU sending is already on, switches into sending the newly specified FISU.

Definition

```
ThorRc hdhcSS7SetFisu(  
    short boardNo,           // Number of the Thor-2 board hosting the HDLC Controller  
    short pipeNo,            // Number of Pipe used for SS#7  
    HdhcSS7FisuT *fisu    // FISU to be sent on the pipe  
) ;
```

Returns

```
THOR_SUCCESS                // OK  
THOR_INVALID_BOARD_NO       // Provided Board Number is not valid  
THOR_HDLC_INVALID_PIPE_NO   // Function was supplied an invalid Pipe number  
THOR_WRONG_CONTEXT          // The HDLC controller must be initialized  
                           // before this function can be called
```

See Also

`hdhcSS7GetSendStatus()`
`hdhcSS7GetReceiveStatus()`

11.3.18 **hdhcSS7GetSendStatus()**

Synopsis

Return the Signalling System #7 (SS#7) Fill-In Signalling Unit (FISU) being sent on the specified pipe

Definition

```
ThorRc hdhcSS7GetSendStatus(
```



```

short boardNo,           // Number of the Thor-2 board hosting the HDLC Controller
short pipeNo,            // Number of the Pipe used for SS#7
HdlcSS7FisuT *fisu    // OUT PARAMETER: FISU currently being sent on the pipe
);

```

Returns

THOR_SUCCESS	// OK
THOR_INVALID_BOARD_NO	// Provided Board Number is not valid
THOR_HDLC_INVALID_PIPE_NO	// Function was supplied an invalid Pipe number
THOR_WRONG_CONTEXT	// The HDLC controller must be initialized and // a Fisu must have been set with hdlcSetFisu() // before this function can be called

See Also

hdhcSS7GetReceiveStatus()
hdhcSS7SetFisu()

11.3.19 hdlcSS7GetReceiveStatus()

Synopsis

Retrieve status and statistics of the incoming SS7 link on the specified pipe.

Definition

```

ThorRc hdlcSS7GetReceiveStatus(
    short boardNo,           // Number of the Thor-2 board hosting the HDLC Controller
    short pipeNo,            // Number of the Pipe used for SS#7
    Ulong *fisuCount,        // OUT PARAMETER: Number of FISUs received
    Ulong *lssuCount,        // OUT PARAMETER: Number of LSSUs received
    Ulong *msuCount,         // OUT PARAMETER: Number of MSUs received
    HdlcSS7FisuT *fisu     // OUT PARAMETER: The last received FISU on the pipe
);

```

Returns

THOR_SUCCESS	// OK
THOR_INVALID_BOARD_NO	// Provided Board Number is not valid
THOR_HDLC_INVALID_PIPE_NO	// Function was supplied an invalid Pipe number
THOR_WRONG_CONTEXT	// The HDLC controller must be initialized and // a Fisu must have been set with hdlcSetFisu() // before this function can be called



See Also

hdlcSS7GetSendStatus()
hdlcSS7SetFisu()

11.3.20 hdlcSS7SetFilter()

Synopsis

Set the filter mask for the filtering out SS#7 FISUs, LSSUs, and/or MSUs.

Definition

```
ThorRc hdlcSS7SetFilter(  
    short boardNo,           // Number of the Thor-2 board hosting the HDLC Controller  
    short pipeNo,            // Number of the Pipe used for SS#7  
    unsigned long filterMask // Filter Mask (see HDLC_SS7_FILTER_XXXX Macros)  
) ;
```

Returns

THOR_SUCCESS	// OK
THOR_INVALID_BOARD_NO	// Provided Board Number is not valid
THOR_HDLC_INVALID_PIPE_NO	// Function was supplied an invalid Pipe number

See Also

hdlcSS7GetFilter()

11.3.21 hdlcSS7GetFilter()

Synopsis

Retrieve the currently active filter mask for filtering out SS#7 FISUs, LSSUs, and/or MSUs

Definition

```
ThorRc hdlcSS7GetFilter(  
    short boardNo,           // Number of the Thor-2 board hosting the HDLC Controller  
    short pipeNo,            // Number of the Pipe used for SS#7  
    unsigned long *filterMask // OUT PARAMETER: Currently active Filter Mask  
                           // (see HDLC_SS7_FILTER_XXXX Macros)  
) ;
```

Returns

THOR_SUCCESS	// OK
--------------	-------



```
THOR_INVALID_BOARD_NO      // Provided Board Number is not valid
THOR_HDLC_INVALID_PIPE_NO // Function was supplied an invalid Pipe number
```

See Also

`hdlcSS7SetFilter()`

11.3.22 `hdlcSS7SendData()`

Synopsis

Send a message (LSSU, MSU, or arbitrary data) on a SS#7 pipe. After the sending of the message has been completed, continues sending the new FISU provided as a parameter to the function.

Definition

```
ThorRc hdlcSS7SendData(
    short boardNo,           // Number of the Thor-2 board hosting the HDLC Controller
    short pipeNo,            // Number of the Pipe used for SS#7
    Byte *data,              // Data to be sent
    Word dataLen,            // Length of the data
    HdlcSS7FisuT *nextFisu // Next FISU to be sent after the data
);
```

Returns

```
THOR_SUCCESS                // OK
THOR_TX_BUSY                 // Sending of the previous message has not been
                             // completed, try again later
THOR_INVALID_BOARD_NO        // Provided Board Number is not valid
THOR_HDLC_INVALID_PIPE_NO   // Function was supplied an invalid Pipe number
```

See Also

`hdlcSS7SetFisu()`

11.3.23 `hdlcSS7SendDataEx()`

Synopsis

Send an SS7 FISU, LSU, or MSU. If LSSU then it repeats the LSSU. If FISU then it repeats the FISU. If MSU then it send the MSU, then it repeats FISUs with the same BSN and FSN as the MSU. The first call to this function must be either a FISU or LSSU.



Note: The function can replace both hdlcSS7SetFisu() and hdlcSS7SendData().

Definition

```
ThorRc hdlcSS7SendDataEx(
    short boardNo,           // Number of the Thor-2 board hosting
                           // the HDLC Controller
    short pipeNo,            // Number of the Pipe used for SS#7
    Byte *data,              // Data to be sent
    Word dataLen             // Length of the data
);
```

Returns

```
THOR_SUCCESS      // OK
THOR_TX_BUSY      // Sending of the previous message
                  // has not been completed, try again later
THOR_INVALID_BOARD_NO // Provided Board Number is not valid
THOR_HDLC_INVALID_PIPE_NO // Function was supplied an
                           // invalid Pipe number
THOR_DATA_TOO_LARGE // Datalength too large
THOR_WRONG_CONTEXT // Pipe not configured or first data
                   // is not FISU or LSSU
```

See Also

hdlcSS7SetFisu()
hdlcSS7SendData()



11.4 Time-Space Switch Functions - *tss.h*

11.4.1 tssClear()

Synopsis

Clears all the Cross-connects from the time-space switch. I.e., every sample of the time-slot will contain the same constant value.

Definition

```
ThorRc tssClear(
    short boardNo
);
```

Returns

THOR_SUCCESS	// OK
THOR_INVALID_BOARD_NO	// The function is supplied an invalid board number

See Also

`tssXConnect()`
`thorConnectChannel()`

11.4.2 tssConstByte()

Synopsis

Generates a constant byte value on an output time-slot. I.e., every time-slot sample (8000 per second) will have the same value. To turn off the constant byte generation, specify byte value 0, or use the *tssClear()* function.

Definition

```
ThorRc tssConstByte(
    short boardNo,      // The number of the Thor-2 board hosting the TSS
    short pcmHwOut,    // Highway to output the constant byte
    short channelOut,  // Time-slot to output the constant byte
    Byte constVal      // Constant value to output
);
```

Returns

THOR_SUCCESS	// OK
THOR_TSS_INVALID_PCM_HW	// The function is supplied an invalid PCH
	// highway number



```
THOR_TSS_INVALID_CHANNEL // The function is supplied an invalid channel number  
THOR_INVALID_BOARD_NO // The function is supplied an invalid board number
```

See Also

`thorByteOnCh()`
`thorByteOffCh()`

11.4.3 tssDisable()

Synopsis

Disables the FMIC after it has been initialized and enabled. The TSS must be disabled when the HDLC controller is being initialized.

Definition

```
ThorRc tssDisable(  
    short boardNo  
) ;
```

Returns

```
THOR_SUCCESS // OK  
THOR_INVALID_BOARD_NO // The function is supplied an invalid board number
```

See Also

`tssInit()`
`tssEnable()`

11.4.4 tssEnable()

Synopsis

Enables the Time-Space Switch after it has been initialized and configured.

Definition

```
ThorRc tssEnable(  
    short boardNo // The number of the Thor-2 board hosting the TSS  
) ;
```

Returns

```
THOR_SUCCESS // OK  
THOR_INVALID_BOARD_NO // The function is supplied an invalid board number
```



See Also

`tssInit()`
`tssDisable()`

11.4.5 `tssInit()`

Synopsis

Initializes and configures the Time-Space Switch. When using the low-level libraries, this function must be called before the time-space switch can be used.

Definition

```
ThorRc tssInit(
    short boardNo           // The number of the Thor-2 board hosting the TSS
);
```

Returns

```
THOR_SUCCESS           // OK
THOR_INVALID_BOARD_NO // The function is supplied an invalid board number
```

See Also

`tssEnable()`

11.4.6 `tssLiConstByte()`

Synopsis

Same operation as the `tssConstByte()` function with the following exception:

Increments the channel number on Li Highways (THOR_PHW_LI0 and THOR_PHW_LI1 highways) by one if the Li is in T1 mode. This is done for the following reason. In T1 mode the Li's map the T1 time-slots 0-23 to PCM highway time-slots (1-24). This violates the zero-counting principle used in this driver. It also complicates applications, when they need to keep track of the LI mode and highway, and treat the time-slot numbers differently. Thus, this function performs the adjustments so that the time-slots in all the highways are always zero-counted. I.e.:

External E1 time-slots 0-31 map to PCM highway time-slots 0-31
External T1 time-slots 0-23 map to PCM highway time-slots 0-23

Note: This function is a convenience function only for certain applications, and need not be used by standard applications.



Definition

```
ThorRc tssLiConstByte(
    short boardNo,      // The number of the Thor-2 board hosting the TSS
    short pcmHwOut,    // Highway to output the constant byte
    short channelOut,  // Time-slot to output the constant byte
    Byte constVal      // Constant value to output
);
```

Returns

```
THOR_SUCCESS          // OK
THOR_TSS_INVALID_PCM_HW // The function is supplied an invalid PCH
                        // highway number
THOR_TSS_INVALID_CHANNEL // The function is supplied an invalid channel number
THOR_INVALID_BOARD_NO   // The function is supplied an invalid board number
```

See Also

tssConstByte()

11.4.7 tssLiXConnect()

Synopsis

Same operation as the tssXConnect() function with the following exception:

Increments the channel number on Li Highways(THOR_PHW_LI0 and THOR_PHW_LI1 highways) by one if the Li is in T1 mode. This is done for the following reason. In T1 mode the Li's map the T1 time-slots 0-23 to PCM highway time-slots (1-24). This violates the zero-counting principle used in this driver. It also complicates applications, when they need to keep track of the LI mode and highway, and treat the time-slot numbers differently. Thus, this function performs the adjustments so that the time-slots in all the highways are always zero-counted. I.e.:

External E1 time-slots 0-31 map to PCM highway time-slots 0-31
External T1 time-slots 0-23 map to PCM highway time-slots 0-23

Note: This function is a convenience function only for certain applications, and need not be used by standard applications.

Definition

```
ThorRc tssLiXConnect(
    short boardNo,      // The number of the Thor-2 board hosting the TSS
    short pcmHwIn,     // The Incoming Highway
    short channelIn,   // The time-slot on the incoming highway
    short pcmHwOut,    // The outgoing highway
```



```
    short channelOut      // The time-slot on the outgoing highway
);
```

Returns

```
THOR_SUCCESS          // OK
THOR_TSS_INVALID_PCM_HW // The function is supplied an invalid PCH
                        // highway number
THOR_TSS_INVALID_CHANNEL // The function is supplied an invalid channel number
THOR_INVALID_BOARD_NO   // The function is supplied an invalid board number
```

See Also

```
tssClear()
tssXConnect()
```

11.4.8 tssReadDataMemory()

Synopsis

Reads a snapshot (one Byte) of a particular channel in the Time-Space Switch Data Memory. The Time-Space Switch buffers the data from the time-slots to be switched in the data memory.

Note: The data-memory access is slow this function will return one byte at a arbitrary time from the incoming stream.

Definition

```
ThorRc tssReadDataMemory(
    short boardNo,           // The number of the Thor-2 board hosting the TSS
    short pcmHwIn,          // Incoming highway
    short channelIn,         // Time-slot on the highway
    Byte *dataVal           // Value (snapshot) in the time-slot
);
```

Returns

```
THOR_SUCCESS          // OK
THOR_TSS_INVALID_PCM_HW // The function is supplied an invalid PCH
                        // highway number
THOR_TSS_INVALID_CHANNEL // The function is supplied an invalid channel number
THOR_INVALID_BOARD_NO   // The function is supplied an invalid board number
```



11.4.9 tssTimingMode()

Synopsis

Sets the MVIP timing mode for the Time-Space Switch. For more information on the timing modes, please refer to the documentation the MVIP-90 Standard. The timing mode can be changed dynamically.

Definition

```
ThorRc tssTimingMode(  
    short boardNo,           // The number of the Thor-2 board hosting the TSS  
    short mode               // Timing Mode  
) ;
```

Returns

```
THOR_SUCCESS                // OK  
THOR_TSS_INVALID_TIMING_MODE // The function was supplied an invalid  
                             // timing mode  
THOR_INVALID_BOARD_NO       // The function was supplied an invalid  
                             // board number
```

11.4.10 tssXConnect()

Synopsis

Cross-connects a time-slot from one highway to another through the time-space switch.

Note: This function only makes a one-way connection. To make a two way connection, this function must be called twice with the parameters swapped.

Definition

```
ThorRc tssXConnect(  
    short boardNo,           // The number of the Thor-2 board hosting the TSS  
    short pcmHwIn,           // The Incoming Highway  
    short channelIn,          // The time-slot on the incoming highway  
    short pcmHwOut,           // The outgoing highway  
    short channelOut          // The time-slot on the outgoing highway  
) ;
```

Returns

```
THOR_SUCCESS                // OK  
THOR_TSS_INVALID_PCM_HW   // The function is supplied an invalid PCH
```



```
// highway number
THOR_TSS_INVALID_CHANNEL // The function is supplied an invalid channel number
THOR_INVALID_BOARD_NO    // The function is supplied an invalid board number
```

See Also

`tssClear()`
`thorConnectChannel()`



11.5 On-board Processor Functions - *lpu.h*

11.5.1 lpuBoot()

Synopsis

Boots up the on-board Processor. The on-board processor is reset and the LPU will begin executing the bootstrap from the flash memory. The LPU can be booted up unconditionally (always) or conditionally only if the LPU is not already running.

Definition

```
ThorRc lpuBoot(  
    short boardNo          // Number of the Thor-2 Board Hosting the LPU  
    LpuBootCondT condition // Either BOOT_UNCONDITIONALLY or BOOT_IF_NOT_RUNNING  
) ;
```

Returns

```
THOR_SUCCESS           // OK  
THOR_BAD_BOOT_VECTOR // Corrupted LPU Boot Vector, Problems in Flash Memory  
THOR_LPU_BOOT_FAILED // LPU Boot Failed, the LPU is not running  
THOR_NO_MEM_WIN       // Memory Window has not been configured, cannot  
                      // access memory  
THOR_INVALID_BOARD_NO // The function was supplied an invalid board number
```

11.5.2 lpuFloat()

Synopsis

Disconnects the LPU from the Local Memory Bus by forcing its pins into a high-impedance state. Note: if the LPU is floated, the DRAM memory will not be refreshed and the data in the DRAM will be lost. However, when the LPU is floated, the host can still access the flash memory. This function is used during updating of the flash boot sector.

Definition

```
ThorRc lpuFloat(  
    short boardNo          // Number of the Thor-2 Board Hosting the LPU  
) ;
```

Returns

```
THOR_SUCCESS           // OK  
THOR_INVALID_BOARD_NO // The function was supplied an invalid board number
```



11.5.3 lpuGetStatus()

Synopsis

Get the Status of the LPU, I.e. Check if it is running or floating (i.e. disconnected from the local on-board buses).

Definition

```
ThorRc lpuGetStatus(
    short      boardNo,    // Number of the Thor-2 Board Hosting the LPU
    LpuStatusT *lpuStatus // Current Status of the LPU (Output)
);
```

Returns

```
THOR_SUCCESS          // OK
THOR_INVALID_BOARD_NO // The function was supplied an invalid board number
```

11.5.4 lpuInstallIsr()

Synopsis

Loads an interrupt service routine for the LPU into the on-board memory (RAM).

Definition

```
ThorRc lpuInstallIsr(
    short boardNo,        // Number of the Thor-2 Board Hosting the LPU
    int   lpuIsrVect,     // Number of the LPU interrupt vector
    Ulong lpuIsrAddr,    // Starting address of the LPU isr Vector
    Byte  *isr,          // Interrupt Service routine
    Word  isrLen         // Length of the Interrupt service routine
);
```

Returns

```
THOR_SUCCESS          // OK
THOR_INVALID_BOARD_NO // The function was supplied an invalid board number
```

11.5.5 lpuIntr()

Synopsis

Generates an interrupt towards the LPU.



Definition

```
ThorRc lpuIntr(
    short boardNo           // Number of the Thor-2 Board Hosting the LPU
);
```

Returns

```
THOR_SUCCESS           // OK
THOR_INVALID_BOARD_NO // The function was supplied an invalid board number
```

11.5.6 lpuLoadApp()

Synopsis

Loads an application program for the LPU into the on-board memory (RAM).

Definition

```
ThorRc lpuLoadApp(
    short boardNo,           // Number of the Thor-2 Board
    char *fileName,          // The name of the file to be loaded
    Ulong baseAddr,          // Starting Address in the on-board
                            // memory where to load the file
    Ulong *noOfBytes         // Number of bytes in the file
                            // (output from this function)
);
```

Returns

```
THOR_SUCCESS           // OK
THOR_FILE_NOT_FOUND   // Unable to find the file
THOR_INVALID_BOARD_NO // The function was supplied an invalid board number
```



11.6 Flash Memory Functions - *flash.h*

11.6.1 flshCheckSectorUsage()

Synopsis

Counts the number of words in use in a specific sector of the Flash. I.e. count all the word that are not equal to 0xFFFF.

Note: Locations containing data 0xFFFF are treated as non-used locations, which may result in an inaccurate count.

Definition

```
ThorRc flshCheckSectorUsage(
    short   boardNo,          // Number of the Thor-2 board hosting the flash
    short   sectNo,           // Number of the sector to be examined
    Ulong  *usage             // Usage count (output from this function)
);
```

Returns

THOR_SUCCESS	// OK
THOR_NO_MEM_WIN	// No Memory Window Configured, Cannot access memory
THOR_INVALID_BOARD_NO	// The function was supplied an invalid board number
THOR_FLASH_INVALID_SECT_NO	// The provided sector number is not valid

See Also

flshCheckUsage()

11.6.2 flshCheckUsage()

Synopsis

Counts the number of words in use in the entire Flash. I.e. count all the word that are not equal to 0xFFFF.

Note: Locations containing data 0xFFFF are treated as non-used locations, which may result in an inaccurate count.

Definition

```
ThorRc flshCheckUsage(
    short boardNo          // Number of the board hosting the flash memory
    Ulong  *usage           // Usage count (output from this function)
);
```



Returns

```
THOR_SUCCESS           // OK
THOR_NO_MEM_WIN       // No Memory Window Configured, Cannot access memory
THOR_INVALID_BOARD_NO // The function was supplied an invalid board number
```

See Also

flshCheckSectorUsage()

11.6.3 flshEraseSector()

Synopsis

Erases (empties) one of the flash's 7 user sectors. Note: the user can erase and rewrite sectors number: 1-6 and 9. For more information on the Thor-2 flash sectors, please see the Thor-2 Technical Description.

Definition

```
ThorRc flshEraseSector(
    short boardNo,           // Number of the board hosting the flash memory
    short sectNo             // Number of the sector to be erased (0 - 6)
);
```

Returns

```
THOR_SUCCESS           // Sector was erased
THOR_FLASH_PRG_FAIL   // Erasure Failed
THOR_INVALID_BOARD_NO  // The function was supplied an invalid board number
THOR_FLASH_INVALID_SECT_NO // The provided sector number is not valid
```

11.6.4 flshLoadData()

Synopsis

Loads an array of data bytes anywhere into the flash memory.

Definition

```
ThorRc flshLoadData(
    short  boardNo,           // Number of the board hosting the flash memory
    Byte   *data,             // Array of data bytes to be written to flash
    Ulong  dataLen,           // Length of the data array
    Ulong  targetBaseAddr     // Absolute memory start address where to place
                                // the data in target memory (must be even)
);
```



Returns

THOR_SUCCESS	// OK
THOR_FLASH_BAD_ADDR	// The Address supplied was not even or not // within the flash memory area
THOR_FLASH_PRG_FAIL	// The Flash write operation failed, the flash may // be corrupted
THOR_INVALID_BOARD_NO	// The supplied board number is not valid

11.6.5 flshLoadPrg()

Synopsis

Loads (writes) an arbitrary program or data sequence into the flash memory.

Definition

```
ThorRc flshLoadPrg(
    short   boardNo,           // Number of the board hosting the flash memory
    char *binFileName,         // Name of file containing the binary code
    Ulong targetBaseAddress   // Absolute starting memory address where to place
                            // the data in target memory (must be even)
);
```

Returns

THOR_SUCCESS	// Loading was successful
THOR_FLASH_BAD_FILE	// File was corrupt
THOR_FLASH_PRG_FAIL	// Loading Failed
THOR_FLASH_BAD_ADDR	// Provided Target address was invalid
THOR_INVALID_BOARD_NO	// The supplied board number is not valid

See Also

flshLoadData()

11.6.6 flshReadMaintSect()

Synopsis

Reads the Thor-2 Maintenance sector from the flash (sector number 10) into a struct. This sector contains information about Boot Vectors and Device Revisions on the board.

Definition

```
ThorRc flshReadMaintSect(
```



```
    short boardNo,           // Number of the board hosting the flash memory
    MaintDataT *md          // Maintenance Data (Boot vectors and revisions)
) ;
```

Returns

THOR_SUCCESS	// OK
THOR_NO_MEM_WIN	// No Memory Window Configured, Cannot access memory
THOR_INVALID_BOARD_NO	// The supplied board number is not valid

See Also

drvReadConfigData()

11.6.7 flshWriteMem()

Synopsis

Writes a data word (16 bits) into the Flash memory.

Note: The address to be written to must be an even address.

Note: This function cannot be used to overwrite old data. The sector must first be erased (i.e. make all locations contain 0xFFFF) and then this function can be used to write into an empty sector.

Definition

```
ThorRc flshWriteMem(
    short boardNo,           // Number of the board hosting the flash memory
    Ulong addr,              // Absolute memory start address where to place
                            // the data in target memory (must be even)
    Word data                // Data to be written
) ;
```

Returns

THOR_SUCCESS	// OK
THOR_FLASH_BAD_ADDR	// The Address supplied was not even or not // within the flash memory area
THOR_FLASH_PRG_FAIL	// The Flash write operation failed, the flash may // be corrupted
THOR_INVALID_BOARD_NO	// The supplied board number is not valid

See Also

fldhEraseSector()



11.7 Codec Functions - *cd.h*

11.7.1 cdConnectDtmf()

Synopsis

Connects the DTMF chip to the codec transmit path, so that the DTMF chip can be used to generate and receive DTMF tones.

Definition

```
ThorRc cdConnectDtmf(
    short boardNo,           // Number of the Thor-2 Board Hosting the Codec
    short codecNo           // Number of the Codec
);
```

Returns

THOR_SUCCESS	// OK
THOR_CD_COMM_FAILURE	// Communication to the Codec Failed
THOR_INVALID_CODEC_NO	// The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO	// The Supplied Codec number is not valid

11.7.2 cdConnectHandsetMic()

Synopsis

Connects handset microphone to one of the codecs.

Definition

```
ThorRc cdConnectHandsetMic(
    short boardNo,           // Number of the board hosting the codec
    short codecNo           // Number of the codec to be connected
);
```

Returns

THOR_SUCCESS	// OK
THOR_CD_COMM_FAILURE	// Communication to the Codec Failed
THOR_INVALID_CODEC_NO	// The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO	// The Supplied Codec number is not valid

See Also

`cdDisconnectHandsetMic()`
`cdConnectHandsetSpeaker()`



```
cdConnectHandsetSpeaker()
```

11.7.3 cdConnectHandsetSpeaker()

Synopsis

Connects a handset speaker (ear piece) to a codec.

Definition

```
ThorRc cdConnectHandsetSpeaker(  
    short boardNo,           // Number of the board hosting the codec  
    short codecNo           // Number of the codec to be connected  
) ;
```

Returns

```
THOR_SUCCESS           // OK  
THOR_CD_COMM_FAILURE // Communication to the Codec Failed  
THOR_INVALID_CODEC_NO // The Supplied Codec number is not valid  
THOR_INVALID_BOARD_NO // The Supplied Board number is not valid
```

See Also

```
cdDisconnectHandsetSpeaker()  
cdConnectHandsetMic()  
cdConnectHandsfreeSpeaker()
```

11.7.4 cdConnectHandsfreeSpeaker()

Synopsis

Connects a hands free speaker to a codec.

Definition

```
ThorRc cdConnectHandsfreeSpeaker(  
    short boardNo,           // Number of the board hosting the codec  
    short codecNo           // Number of the codec to be connected  
) ;
```

Returns

```
THOR_SUCCESS           // OK  
THOR_CD_COMM_FAILURE // Communication to the Codec Failed  
THOR_INVALID_CODEC_NO // The Supplied Codec number is not valid  
THOR_INVALID_BOARD_NO // The Supplied Board number is not valid
```



See Also

```
cdDisconnectHandsfreeSpeaker()
cdConnectHandsetMic()
cdConnectHandsetSpeaker()
```

11.7.5 cdDigitalGain()

Synopsis

Sets the Digital gain in a codec (for transmit and received directions). The digital gain can be set in 3dB increments. The total gain for the Codec is the sum of the Digital and Filter gain.

Definition

```
ThorRc cdDigitalGain(
    short boardNo,           // Number of the board hosting the codec
    short codecNo,          // Number of the codec to be adjusted
    CdDigitalGainT txGain,   // Transmit Gain
    CdDigitalGainT rxGain   // Receive Gain
);
```

Returns

THOR_SUCCESS	// OK
THOR_CD_COMM_FAILURE	// Communication to the Codec Failed
THOR_INVALID_CODEC_NO	// The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO	// The Supplied Codec number is not valid

See Also

cdFilterGain()

11.7.6 cdDisconnectHandsetMic()

Synopsis

Disconnects a handset speaker from a codec (if it has been previously connected with cdConnectHandsetMic()).

Definition

```
ThorRc cdDisconnectHandsetMic(
    short boardNo,           // Number of the board hosting the codec
    short codecNo            // Number of the codec to be connected
);
```



Returns

```
THOR_SUCCESS          // OK
THOR_CD_COMM_FAILURE // Communication to the Codec Failed
THOR_INVALID_CODEC_NO // The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO // The Supplied Codec number is not valid
```

See Also

```
cdConnectHandsetMic()
cdDisconnectHandsetSpeaker()
cdDisconnectHandsfreeSpeaker()
```

11.7.7 cdDisconnectHandsetSpeaker()

Synopsis

Disconnects a handset speaker (ear piece) from a codec (if it has been previously connected with cdConnectHandsetSpeaker()).

Definition

```
ThorRc cdDisconnectHandsetSpeaker(
    short boardNo,           // Number of the board hosting the codec
    short codecNo            // Number of the codec to be connected
);
```

Returns

```
THOR_SUCCESS          // OK
THOR_CD_COMM_FAILURE // Communication to the Codec Failed
THOR_INVALID_CODEC_NO // The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO // The Supplied Codec number is not valid
```

See Also

```
cdConnectHandsetSpeaker()
cdDisconnectHandsetMic()
cdDisconnectHandsfreeSpeaker()
```

11.7.8 cdDisconnectHandsfreeSpeaker()

Synopsis

Disconnects a handset speaker from a codec (if it has been previously connected with cdConnectHandsfreeSpeaker())



Definition

```
ThorRc cdDisconnectHandsfreeSpeaker()
    short boardNo,           // Number of the board hosting the codec
    short codecNo           // Number of the codec to be connected
);
```

Returns

THOR_SUCCESS	// OK
THOR_CD_COMM_FAILURE	// Communication to the Codec Failed
THOR_INVALID_CODEC_NO	// The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO	// The Supplied Codec number is not valid

See Also

`cdConnectHandsfreeSpeaker()`
`cdDisconnectHandsetMic()`
`cdDisconnectHandsetSpeaker()`

11.7.9 **cdFilterGain()**

Synopsis

Sets the Codec Filter gain in both receive and transmit directions. The total gain for the Codec is the sum of the Digital and Filter gain.

Definition

```
ThorRc cdFilterGain()
    short boardNo,           // Number of the board hosting the codec
    short codecNo,           // Number of the codec to be adjusted
    short txGain,            // Transmit Gain in dB (0 dB through 7dB)
    short rxGain             // Receive Gain in dB (-7 dB through 0dB)
);
```

Returns

THOR_SUCCESS	// OK
THOR_CD_INVALID_TX_GAIN	// Supplied Transmit (TX) gain is invalid
THOR_CD_INVALID_RX_GAIN	// Supplied Receive (RX) gain is invalid
THOR_CD_COMM_FAILURE	// Communication to the Codec Failed
THOR_INVALID_CODEC_NO	// The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO	// The Supplied Codec number is not valid



11.7.10 cdInit()

Synopsis

Initializes a Codec chip to use a specified coding law and code assignment.

Definition

```
ThorRc cdInit(
    short boardNo,           // Number of the Thor-2 Board Hosting the Codec
    short codecNo,           // Number of the Codec
    CdLawT law,              // u-law or A-law
    CdCodeT code             // sign magnitude or CCITT code assignment
                            // (for input/output)
);
```

Returns

THOR_SUCCESS	// OK
THOR_CD_INVALID_LAW	// Supplied Codec Coding Law is invalid
THOR_CD_INVALID_CODE	// Supplied Codec Coding code is invalid
THOR_CD_COMM_FAILURE	// Communication to the Codec Failed
THOR_INVALID_CODEC_NO	// The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO	// The Supplied Codec number is not valid

11.7.11 cdMuteOff()

Synopsis

Enables the phone (handset) after it has been muted with *cdMuteOn()*.

Definition

```
ThorRc cdMuteOff(
    short boardNo,           // Number of the Thor-2 Board Hosting the Codec
    short codecNo            // Number of the Codec
);
```

Returns

THOR_SUCCESS	// OK
THOR_CD_COMM_FAILURE	// Communication to the Codec Failed
THOR_INVALID_CODEC_NO	// The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO	// The Supplied Codec number is not valid



See Also

`cdMuteOn()`

11.7.12 `cdMuteOn()`

Synopsis

Mutes the phone (handset). To enable the handset again, use `cdMuteOff()`.

Definition

```
ThorRc cdMuteOn(
    short boardNo,           // Number of the Thor-2 Board Hosting the Codec
    short codecNo            // Number of the Codec
);
```

Returns

<code>THOR_SUCCESS</code>	// OK
<code>THOR_CD_COMM_FAILURE</code>	// Communication to the Codec Failed
<code>THOR_INVALID_CODEC_NO</code>	// The Supplied Codec number is not valid
<code>THOR_INVALID_BOARD_NO</code>	// The Supplied Codec number is not valid

See Also

`cdMuteOff()`

11.7.13 `cdReset()`

Synopsis

Performs a reset on a Codec chip.

Definition

```
ThorRc cdReset(
    short boardNo,           // Number of the board hosting the codec
    short codecNo            // Number of the codec to be reset
);
```

Returns

<code>THOR_SUCCESS</code>	// OK
<code>THOR_CD_COMM_FAILURE</code>	// Communication to the Codec Failed
<code>THOR_INVALID_CODEC_NO</code>	// The Supplied Codec number is not valid
<code>THOR_INVALID_BOARD_NO</code>	// The Supplied Codec number is not valid



11.7.14 cdSendDtmf()

Synopsis

Sends a DTMF tone from the codec. Note that both the Codecs and the DTMF transceivers can be used to send DTMF tones. However, only the DTMF transceivers are capable of receiving and detecting DTMF tones.

Definition

```
ThorRc cdSendDtmf(
    short boardNo,           // Number of the Thor-2 Board Hosting the Codec
    short codecNo,          // Number of the Codec
    char cDigit             // The DTMF digit to be sent
);
```

Returns

```
THOR_SUCCESS           // OK
THOR_CD_COMM_FAILURE // Communication to the Codec Failed
THOR_INVALID_CODEC_NO // The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO // The Supplied Board number is not valid
```

See Also

`dtrmfSend()`
`dtrmfSendBurst()`

11.7.15 cdSendMf()

Synopsis

Sends a MF tone from a Codec.

The generated tone Frequencies are as follows:

	Low f	High f
<hr/>		
1:	700Hz,	900Hz
2:	700Hz,	1100Hz
3:	900Hz,	1100Hz
4:	700Hz,	1300Hz
5:	900Hz,	1300Hz
6:	1100Hz,	1300Hz
7:	700Hz,	1500Hz
8:	900Hz,	1500Hz



```

9: 1100Hz, 1500Hz
0: 1300Hz, 1500Hz
KP: 1100Hz, 1700Hz
ST: 1500Hz, 1700Hz

```

Definition

```

ThorRc cdSendMf(
    short boardNo,           // Number of the Thor-2 Board Hosting the Codec
    short codecNo,          // Number of the Codec
    char cDigit             // The MF digit to be sent
);

```

Returns

```

THOR_SUCCESS           // OK
THOR_CD_COMM_FAILURE // Communication to the Codec Failed
THOR_INVALID_CODEC_NO // The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO // The Supplied Codec number is not valid
THOR_INVALID_DIGIT    // The supplied digit is invalid, use
                      // '0' - '9', 'k' for KP, 's' for ST

```

See Also

`dtmlfSendDtmf()`

11.7.16 cdToneOff()

Synopsis

Stop sending MF or DTMF tones.

Definition

```

ThorRc cdToneOff(
    short boardNo,           // Number of the board hosting the codec
    short codecNo            // Number of the codec in use
);

```

Returns

```

THOR_SUCCESS           // OK
THOR_CD_COMM_FAILURE // Communication to the Codec Failed
THOR_INVALID_CODEC_NO // The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO // The Supplied Codec number is not valid

```



See Also

cdSendDtmf()
cdSendMf()

11.7.17 cdVoiceSideToneOff()

Synopsis

Turns the side tone in the speaker off.

Definition

```
ThorRc cdVoiceSideToneOn(
    short boardNo,           // Number of the board hosting the codec
    short codecNo            // Number of the codec in use
);
```

Returns

THOR_SUCCESS	// OK
THOR_CD_COMM_FAILURE	// Communication to the Codec Failed
THOR_INVALID_CODEC_NO	// The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO	// The Supplied Codec number is not valid

See Also

cdVoiceSideToneOn()

11.7.18 cdVoiceSideToneOn()

Synopsis

Turns the side tone in the speaker on.

Definition

```
ThorRc cdVoiceSideToneOn(
    short boardNo,           // Number of the board hosting the codec
    short codecNo            // Number of the codec in use
);
```

Returns

THOR_SUCCESS	// OK
THOR_CD_COMM_FAILURE	// Communication to the Codec Failed
THOR_INVALID_CODEC_NO	// The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO	// The Supplied Codec number is not valid



See Also

`cdVoiceSideToneOff()`



11.8 DTMF Transceiver Function - *dtrmf.h*

11.8.1 dtmfBurstStatus()

Synopsis

Checks whether the DTMF transceiver is busy sending tones or idle and ready to send.

Definition

```
ThorRc dtmfBurstStatus(  
    short boardNo,           // Number of the board hosting the DTMF chips  
    short dtmfNo            // DTMF chip number  
) ;
```

Returns

THOR_SUCCESS	// not busy sending DTMF tones
THOR_DTMF_BUSY	// busy sending DTMF tones
THOR_INVALID_BOARD_NO	// Supplied Board Number is not valid
THOR_INVALID_DTMF_NO	// Supplied DTMF Number is not valid

11.8.2 dtmfEnable()

Synopsis

Enables a DTMF Transceiver chip. This function must be called before the DTMF chips are used.

Definition

```
ThorRc dtmfEnable(  
    short boardNo,           // Number of the board hosting the DTMF chips  
    short dtmfNo             // Number of the DTMF chip  
    Bool store               // Determines whether to store all  
                            // detected DTMF tones in the FIFO.  
) ;
```

Returns

THOR_SUCCESS	// OK
THOR_INVALID_BOARD_NO	// Supplied Board Number is not valid
THOR_INVALID_DTMF_NO	// Supplied DTMF Number is not valid



11.8.3 dtmfReceived()

Synopsis

A non-blocking function that either returns the latest detected DTMF tone or THOR_NO_TONE if there was no tone received.

Note that the codec must be properly cross-connected with *tssXConnect()* prior to calling this function. If there was one or more tones (THOR_SUCCESS), they can be read with the *drvRead()* function (like any other message) if the store option is set in the call to *dtmfEnable()*. This function stores the latest DTMF digit that was detected, and it returns that value in the 'dtmfDigit' parameter. It then clears its internally stored digit.

Note also that DTMF chip 0 is always tied to Codec 0, and DTMF chip 1 is always tied to Codec 1.

Definition

```
ThorRc dtmfReceived(
    short boardNo,           // Board number
    short dtmfNo,            // Number of the Dtmf chip (0 or 1) to be used.
    char *dtmfDigit          // Last DTMF digit received (or \0 if none)
);
```

Returns

THOR_SUCCESS	// a DTMF tone was detected
THOR_DTMF_NO_TONE	// no DTMF tones were detected
THOR_INVALID_BOARD_NO	// Supplied Board Number is not valid
THOR_INVALID_DTMF_NO	// Supplied DTMF Number is not valid

11.8.4 dtmfReset()

Synopsis

Initializes and resets a DTMF chip.

Definition

```
ThorRc dtmfReset(
    short boardNo,           // Number of the board hosting the DTMF chips
    short dtmfNo             // Number of the DTMF chip
);
```



Returns

```
THOR_SUCCESS          // OK
THOR_INVALID_BOARD_NO // Supplied Board Number is not valid
THOR_INVALID_DTMF_NO  // Supplied DTMF Number is not valid
```

11.8.5 dtmfSend()

Synopsis

Sends DTMF tones in a non-burst mode; I.e., the digits are sent with specified tone on and pause intervals.

Definition

```
ThorRc dtmfSend(
    short boardNo,           // Number of the board hosting the DTMF chips
    short dtmfNo,            // DTMF chip number
    char *digits,            // Digits to be sent
    Word onTime,             // Time in msec to keep the tone on
    Word offTime             // Time un msec between the tones
);
```

Returns

```
THOR_SUCCESS          // OK
THOR_INVALID_BOARD_NO // Supplied Board Number is not valid
THOR_INVALID_DTMF_NO  // Supplied DTMF Number is not valid
```

See Also

`dtmfSendBurst()`
`thorSendDtmf()`

11.8.6 dtmfSendBurst()

Synopsis

Sends DTMF tones in burst mode. I.e. the tones are send approximately with 51 msec +- 1 msec tone on and pause intervals.

Definition

```
ThorRc dtmfSendBurst(
    short boardNo,           // Number of the board hosting the DTMF chips
    short dtmfNo,            // DTMF chip number
    char *digits             // Digits to be sent
```



) ;

Returns

THOR_SUCCESS	// OK
THOR_INVALID_BOARD_NO	// Supplied Board Number is not valid
THOR_INVALID_DTMF_NO	// Supplied DTMF Number is not valid

See Also

`thorSendDtmf()`

11.8.7 dtmfToneOff()

Synopsis

Turns off a constant DTMF tone generation.

Definition

```
ThorRc dtmfToneOff(
    short boardNo,                      // Number of the board hosting the DTMF chips
    short dtmfNo,                        // DTMF chip number
);
```

Returns

THOR_SUCCESS	// OK
THOR_INVALID_BOARD_NO	// Supplied Board Number is not valid
THOR_INVALID_DTMF_NO	// Supplied DTMF Number is not valid

See Also

`dtmfToneOn()`

11.8.8 dtmfToneOn()

Synopsis

Turns on a constant DTMF tone generation.

Definition

```
ThorRc dtmfToneOn(
    short boardNo,                      // Number of the board hosting the DTMF chips
    short dtmfNo,                        // DTMF chip number
    short digit                          // Digit to be send
);
```



Returns

```
THOR_SUCCESS          // OK
THOR_INVALID_BOARD_NO // Supplied Board Number is not valid
THOR_INVALID_DTMF_NO  // Supplied DTMF Number is not valid
```

See Also

`dtmfToneOff()`





12. System API - *t2vxddef.h*

12.1 Driver (DRV) Operations

12.1.1 IOCTL_DRV_BOARD_EXISTENCE

Synopsis

Checks if a Thor-2 board exists at the specified I/O-address.

Input Data Type

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board
    short ioBaseAddr;        // I/O-base address of the Thor-2 Board
} IoctlDrvBoardExistenceT;
```

Output Data Type

```
ThorRc           // Function return code
```

Possible Return Codes

```
THOR_SUCCESS      // a THOR-2 board was found
THOR_NO_BOARD     // no THOR-2 board was found
THOR_INVALID_BOARD_NO // Supplied board number is not valid
THOR_INVALID_ADDR // Supplied Address is not valid
```

Equivalent LAPI Function

```
drvBoardExistence()
```

12.1.2 IOCTL_DRV_CMP_MEM_BLOCK

Synopsis

Compares the contents of a block of on-board memory to a block of data in the host memory.

Input Data Type

A buffer containing the following data:

```
short  boardNo // Number of the Thor-2 board
Ulong  lmbAddr // On-board memory starting address for the comparison
Uint   count    // Length of the databuffer to compared with the on-board memory
Byte[count] // databuffer to be compared (count number of Bytes)
```



Output Data Type

```
short           // Result of the comparison
               // == 0 if the Buffers are equal
               // != 0 if the Buffers are different
```

Equivalent LAPI Function

drvCmpMemBlock()

See Also

IOCTL_DRV_READ_MEM_BLOCK
IOCTL_FILL_MEM
IOCTL_DRV_WRITE_MEM_BLOCK

12.1.3 IOCTL_DRV_CONFIGURE_LI

Synopsis

Configures an Li (used internally within the driver).

Input Data Type

```
typedef struct {
    short boardNo;   // Number of the board hosting the Line Interface transceiver
    short liNo;     // Number of the Line Interface transceiver
    UINT32 liMode;  // Mode to be configured to: THOR_T1 or THOR_E1 (LiMode)
} IoctlDrvLiConfigureT;
```

Output Data Type

ThorRc // Function return code

Equivalent LAPI Function

-

See Also

-

12.1.4 IOCTL_DRV_CONFIGURE_PIPE

Synopsis

Configures an Pipe (used internally within the driver).



Input Data Type

```
typedef struct {
    short boardNo;
    short pipeNo;
    Byte txBitRateMask[HDLC_TIMESLOTS_MAX];
    Byte rxBitRateMask[HDLC_TIMESLOTS_MAX];
    UINT32 frameFillType;      // (ThorFrameFillType)
} IoctlDrvConfigurePipeT;
```

Output Data Type

```
ThorRc           // Function return code
```

Equivalent LAPI Function

-

See Also

-

12.1.5 IOCTL_DRV_DISABLE_CPU_INTR

Synopsis

Disables Thor-2 device interrupts towards the CPU according to the intrMask. The mask has one bit per device (see Thor-2 Technical Description). A '1' in a mask bit will disable the specific device from interrupting the CPU. A '0' will keep the current value of the mask bit. To enable the interrupts, use *IOCTL_DRV_ENABLE_CPU_INTR*.

Input Data Structure

```
typedef struct {
    short boardNo;          // Number of the Thor-2 board
    short intrMask;         // Interrupt mask
} IoctlDrvIntrT;
```

Output Data Structure

```
ThorRc           // Function return code
```

Possible Return Codes

```
THOR_SUCCESS      // OK
THOR_INVALID_BOARD_NO // Supplied board number is not valid
```



Equivalent LAPI Function

drvDisableCpuIntr()

See Also

IOCTL_DRV_ENABLE_CPU_INTR
IOCTL_DRV_ENABLE_LPU_INTR
IOCTL_DRV_DISABLE_LPU_INTR

12.1.6 IOCTL_DRV_DISABLE_LPU_INTR

Synopsis

Disables interrupts from on-board devices towards the LPU. The mask has one bit per device (see Thor-2 Technical Description). A '1' in a mask bit will disable the specific device from interrupting the LPU. A '0' will keep the current value of the mask bit. To enable the interrupts, use *IOCTL_DRV_ENABLE_LPU_INTR*.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board
    short intrMask;          // Interrupt mask
} IoctlDrvIntrT;
```

Output Data Structure

```
ThorRc                  // Function return code
```

Possible Return Codes

```
THOR_SUCCESS            // OK
THOR_INVALID_BOARD_NO   // Supplied board number is not valid
```

Equivalent LAPI Function

drvDisableLpuIntr()

See Also

IOCTL_DRV_ENABLE_LPU_INTR
IOCTL_DRV_ENABLE_CPU_INTR
IOCTL_DRV_DISABLE_CPU_INTR



12.1.7 IOCTL_DRV_ENABLE_CPU_INTR

Synopsis

Enables (unmasks) interrupts from on-board devices towards the CPU. The mask has one bit per device (see Thor-2 Technical Description). A '1' in a mask bit will enable the specific device to interrupt the CPU. A '0' will keep the current value of the mask bit. To disable the interrupts, use the *IOCTL_DRV_DISABLE_CPU_INTR*.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board
    short intrMask;          // Interrupt mask
} IoctlDrvIntrT;
```

Output Data Structure

```
ThorRc           // Function return code
```

Possible Return Codes

```
THOR_SUCCESS      // OK
THOR_INVALID_BOARD_NO // Supplied board number is not valid
```

Equivalent LAPI Function

```
drvEnableCpuIntr()
```

See Also

```
IOCTL_DRV_DISABLE_CPU_INTR
IOCTL_DRV_ENABLE_LPU_INTR
IOCTL_DRV_DISABLE_LPU_INTR
```

12.1.8 IOCTL_DRV_ENABLE_LPU_INTR

Synopsis

Enables (unmasks) interrupts from on-board devices towards the LPU. The mask has one bit per device (see Thor-2 Technical Description). A '1' in a mask bit will enable the specific device to interrupt the LPU. A '0' will keep the current value of the mask bit. To disable the interrupts, use the *IOCTL_DRV_DISABLE_LPU_INTR*.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board
```



```
    short intrMask;           // Interrupt mask
} IoctlDrvIntrT;
```

Output Data Structure

ThorRc // Function return code

Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_INVALID_BOARD_NO // Supplied board number is not valid
```

Equivalent LAPI Function

drvEnableLpuIntr()

See Also

```
IOCTL_DRV_DISABLE_LPU_INTR
IOCTL_DRV_ENABLE_CPU_INTR
IOCTL_DRV_DISABLE_CPU_INTR
```

12.1.9 IOCTL_DRV_ERROR_2_STR

Synopsis

Translates an ThorRc error code to an error string.

Input Data Structure

ThorRc errorCode; // Error code to be translated

Output Data Structure

```
typedef struct {
    UINT32 rc;           // Return code (ThorRc)
    short strLen;        // Length of the returned string
    char str[IOCTL_DRV_RETURN_STR_LEN_MAX+1]; // Corresponding error string
} IoctlDrvStringReturnT;
```

Possible Return Codes

THOR_SUCCESS // OK

Equivalent LAPI Function

-



See Also

-

12.1.10 IOCTL_DRV_FIFO_USAGE

Synopsis

Returns the current usage level (number of messages) of the driver internal fifo

Input Data Structure

None

Output Data Structure

```
typedef struct {
    ThorRc rc;          // Function return code
    Word   noOfMsgs;     // Number of messages currently in the driver fifo
} IoctlDrvFifoReturnT;
```

Possible Return Codes

THOR_SUCCESS // OK

Equivalent LAPI Function

drvFifoUsage()

See Also

IOCTL_DRV_FIFO_MAX_USAGE
IOCTL_DRV_FIFO_LOST_MSGS
IOCTL_DRV_FIFO_SIZE

12.1.11 IOCTL_DRV_FIFO_MAX_USAGE

Synopsis

Returns the maximum usage level (number of messages) of the driver internal fifo since the last call of this function

Input Data Structure

None

Output Data Structure

```
typedef struct {
    ThorRc rc;          // Function return code
```



```
Word    noOfMsgs; // Max number of messages in the fifo since the last check
} IoctlDrvFifoReturnT;
```

Possible Return Codes

THOR_SUCCESS	// OK
--------------	-------

Equivalent LAPI Function

drvFifoMaxUsage()

See Also

IOCTL_DRV_FIFO_USAGE
IOCTL_DRV_FIFO_LOST_MSGS
IOCTL_DRV_FIFO_SIZE

12.1.12 IOCTL_DRV_FIFO_LOST_MSGS

Synopsis

Returns the number of lost messages due to driver internal fifo overflow

Input Data Structure

None

Output Data Structure

```
typedef struct {
    ThorRc rc;           // Function return code
    Word    noOfMsgs; // Number of messages lost due to driver fifo overflow
} IoctlDrvFifoReturnT;
```

Possible Return Codes

THOR_SUCCESS	// OK
--------------	-------

Equivalent LAPI Function

drvFifoLostMsgs()

See Also

IOCTL_DRV_FIFO_USAGE
IOCTL_DRV_FIFO_MAX_USAGE
IOCTL_DRV_FIFO_SIZE



12.1.13 IOCTL_DRV_FIFO_SIZE

Synopsis

Returns the size of the driver internal fifo

Input Data Structure

None

Output Data Structure

```
typedef struct {
    ThorRc rc;           // Function return code
    Word   noOfMsgs;    // Size of the Driver internal message FIFO
} IoctlDrvFifoReturnT;
```

Possible Return Codes

THOR_SUCCESS // OK

Equivalent LAPI Function

drvFifoSize()

See Also

IOCTL_DRV_FIFO_USAGE
IOCTL_DRV_FIFO_MAX_USAGE
IOCTL_DRV_FIFO_LOST_MSGS

12.1.14 IOCTL_DRV_FILL_MEM

Synopsis

Fills a block of the on-board memory (DRAM) with a constant value.

Caveat: Only works for block sizes smaller than the memory window size.

Input Data Structure

```
typedef struct {
    short boardNo;          // Number of the Thor-2 board
    Ulong lmbAddr;         // Local (on-board) Memory address (flat model)
    Word   value;          // 8-bit value to be written
    Uint   count;          // Number of bytes to be written
} IoctlDrvFillMemT;
```



Output Data Structure

```
ThorRc           // Function return code
```

Possible Return Codes

THOR_SUCCESS	// OK
THOR_DATA_TOO_LARGE	// Attempted to fill a memory block that is larger // than the memory window size
THOR_INVALID_BOARD_NO	// Supplied board number is not valid

Equivalent LAPI Function

```
drvFillMem()
```

See Also

[IOCTLE_DRV_WRITE_MEM_BLOCK](#)

12.1.15 IOCTL_FPGA_STATUS

Synopsis

Checks if the Field Programmable Gate Arrays (FPGAs) on the Thor-2 board have been configured successfully.

Input Data Structure

```
short boardNo;           // Number of the Thor-2 board
```

Output Data Structure

```
ThorRc           // Function Return code
```

Possible Return Codes

THOR_SUCCESS	// the FPGAs are configured
THOR_FPGA_NOT_LOADED	// the FPGAs are not configured
THOR_INVALID_BOARD_NO	// Supplied board number is not valid

Equivalent LAPI Function

```
drvFpgaStatus()
```



12.1.16 IOCTL_DRV_IDENT

Synopsis

Returns the identification string of the Thor-2 driver. The identification number contains the Odin TeleSystems' product number, the driver revision, and the date the driver was compiled.

Input Data Structure

NULL

Output Data Structure

```
typedef struct {
    ThorRc rc;                                // Function Return code
    char str[IOCTL_DRV_RETURN_STR_LEN_MAX+1];   // Status string
    short strLen;                             // Length of the returned string
} IOCTLDrvStringReturnT;
```

Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_DATA_TOO_LARGE // Return String is larger than the size of the reserved
                     // return buffer
```

Equivalent LAPI Function

drvIdent()

12.1.17 IOCTL_DRV_INIT

Synopsis

Connects to the Driver and initializes the Driver internal data structures. In Windows 95 and Windows NT this function must be called before any other driver function is called.

Input Data Structure

NULL

Output Data Structure

```
ThorRc          // Function Return code
```

Possible Return Codes

```
THOR_SUCCESS          // OK
```



```

THOR_OUT_OF_MEMORY           // Not enough memory to create the message FIFO
THOR_DEVICE_OPEN_FAILED      // Unable to connect to the driver
THOR_NO_BOARD                // No Thor-2 Board found

```

Equivalent LAPI Function

drvInit()

12.1.18 IOCTL_DRV_INIT_HDLC

Synopsis

Performs a hardware reset of the HDLC controller. Initializes the HDLC memory structure.

Input Data Structure

```

typedef struct {
    short boardNo;           // Number of the Thor-2 board
    Ulong memSize;          // Total memory on the board (in bytes)
    HdlcBufAllocT txBufAlloc[HDLC_CHANNELS_MAX]; // Array of the memory allocation
                                                // for each 32 channels (transmit direction)
    HdlcBufAllocT rxBufAlloc[HDLC_CHANNELS_MAX]; // Array of the memory allocation
                                                // for each 32 channels (receive direction)
    short maxFrameLen;      // Max allowed HDLC frame length (only used in HDLC,
                            // TMB and TMR modes)
} IoctlDrvInitHdclT;

```

Output Data Structure

```

typedef struct {
    ThorRc rc;              // Return code
    Ulong memoryUsed;        // Total amount of memory used by the HDLC controller
} IoctlDrvInitHdclReturnT;

```

Possible Return Codes

```

THOR_SUCCESS                // OK
THOR_OUT_OF_MEMORY          // Not enough on-board memory to setup
                            // the HDLC receive and transmit data structures
THOR_NO_MEM_WIN             // Memory Window has not been setup (DOS).
                            // Call drvSetupMemWin() first.
THOR_HDLC_INIT_FAILURE      // HDLC controller initialization failed
THOR_INVALID_BOARD_NO        // Supplied board number is not valid

```



Equivalent LAPI Function

drvInitHdLC()

12.1.19 IOCTL_DRV_READ

Synopsis

Retrieves the next received frame (an HDLC message, a device status message, or a dtmf tone) from the driver receive FIFO. Checks all the boards and all the pipes and devices for available messages.

Note: This function cannot be used with transparent pipes. Use *IOCTL_DRV_READ_TMA* instead.

Input Data Structure

```
Word fmBufSize;           // Size of buffer reserved for storage of the
                           // received message.
```

Output Data Structure

```
typedef struct {
    ThorRc rc;                  // Function return code
    Byte fmBuf[HDLC_FRAME_LENGTH_MAX+1]; // Buffer into which the received
                                         // message will be written
    ThorFrameHeader fmHeader; // Pointer to header structure that will
                           // be filled in by Driver
} IoctlDrvReadReturnT;
```

Possible Return Codes

```
THOR_SUCCESS          // A received frame was retrieved successfully
THOR_NO_FRAMES        // No complete frames have been received and
                      // ready to be read.
```

Equivalent LAPI Function

drvRead()

See Also

IOCTL_DRV_READ_EX
IOCTL_DRV_READ_TMA
IOCTL_HDLC_WRITE_PIPE



12.1.20 IOCTL_DRV_READ_EX

Synopsis

Fetch a group of received messages (frame, status code, or dtmf tone). This is an extended function of IOCTL_DRV_READ which only fetches one message. Using this code instead of IOCTL_DRV_READ will reduce context switching overhead, thus increase performance.

Input Data Structure

```
typedef struct {
    Word     coFmBuf;
    Word     cbFmBuf;
    Byte    *psqFmBuf;   // Pointer to User memory.
                      // Buffer into which the received message
                      // will be written
    IoctlThorFrameHeader *psqFmHeader; // Pointer to User memory.
                      // Header structure that will be
                      // filled in by Driver (ThorFrameHeader)
    Word    *pcoFmReturned; // Pointer to User memory. Number
                      // of frames returned in this call
} IoctlDrvReadExT;
```

Output Data Structure

see Input Data Structure

Possible Return Codes

```
THOR_SUCCESS          // One ore more received frame was retrieved
                     // successfully
THOR_NO_FRAMES       // No complete frames have been received and
                     // ready to be read.
```

Equivalent LAPI Function

drvReadEx()

See Also

IOCTL_DRV_READ



12.1.21 IOCTL_DRV_READ_SERIAL_NO

Synopsis

Read the Thor2 serial number.

Input Data Structure

```
typedef struct {
    short      boardNo;      // Number of the Thor-2 board
    short      serNoStrBufSize; // FLASH_SERIALNO_MAX_BYTES+1
} IoctlDrvReadSerialNoT;
```

Output Data Structure

```
typedef struct {
    UINT32 rc;                // Function return code (ThorRc)
    char   serialNoStr[FLASH_SERIALNO_MAX_BYTES+1]; // Serial number string
} IoctlDrvReadSerialNoReturnT;
```

Possible Return Codes

```
THOR_SUCCESS           // Serial number was read sucessfully
```

Equivalent LAPI Function

```
drvReadSerialNo()
```

See Also

-

12.1.22 IOCTL_DRV_READ_TMA

Synopsis

Fetches data from any transparent pipe if any data is available. The function checks all the boards and all the transparent pipes for received data.

Input Data Structure

```
Word  fmBufSize;        // Size of buffer reserved for storage of the
                           // received message.
```

Output Data Structure

```
typedef struct {
    ThorRc rc;             // Function return code
```



```
Byte fmBuf[HDLC_FRAME_LENGTH_MAX+1]; // Buffer into which the received
                                         // message will be written
ThorFrameHeader fmHeader; // Pointer to header structure that will
                           // be filled in by Driver
} IoctlDrvReadReturnT;
```

Possible Return Codes

THOR_SUCCESS	// A received frame was retrieved successfully
THOR_NO_FRAMES	// No data has been received and // is ready to be read.

Equivalent LAPI Function

drvReadTma()

See Also

IOCTL_DRV_READ_TMA
IOCTL_HDLC_WRITE_PIPE

12.1.23 IOCTL_DRV_READ_CONFIG_DATA

Synopsis

Reads the Thor2 T1/E1 configuration data from the flash.

Input Data Structure

```
short boardNo; // Number of the Thor-2 board
```

Output Data Structure

```
typedef struct {
    ThorRc      rc;           // Function return code
    ThorConfigT cfgData;     // Configuration data
} IoctlDrvReadConfigDataReturnT;
```

Possible Return Codes

THOR_SUCCESS	// OK
THOR_WRONG_CONFIG_VER	// Configuration data has a different revision // than supported by this driver
THOR_INVALID_BOARD_NO	// Supplied board number is not valid

Equivalent LAPI Function

drvReadConfigData()



See Also

IOCTL_DRV_WRITE_CONFIG_DATA

12.1.24 IOCTL_DRV_READ_IO

Synopsis

Reads a byte (8 bits) from an I/O-port in an on-board device.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board
    Uint portId;            // Local I/O-bus port address to be read
} IoctlDrvReadIoT;
```

Output Data Structure

```
typedef struct {
    ThorRc rc;              // Function Return code
    Byte value;              // value of the I/O-port.
} IoctlDrvReadIoReturnT;
```

Possible Return Codes

THOR_SUCCESS

Equivalent LAPI Function

drvReadIo()

See Also

IOCTL_DRV_WRITE_IO

12.1.25 IOCTL_DRV_READ_MEM

Synopsis

Reads a Word (16 bits) from an on-board memory (DRAM) location.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board
    Ulong lmbAddr;          // Local (on-board) Memory address (flat model)
} IoctlDrvReadMemT;
```



Output Data Structure

```
typedef struct {
    ThorRc rc;           // Function return code
    Word   value;        // Value of the memory location
} IoctlDrvReadMemReturnT;
```

Possible Return Codes

THOR_SUCCESS

Equivalent LAPI Function

drvReadMem()

See Also

IOCTL_DRV_READ_MEM32
IOCTL_DRV_WRITE_MEM

12.1.26 IOCTL_DRV_READ_MEM32

Synopsis

Reads a Double-Word (32 bits) from an on-board memory (DRAM) location.

Input Data Structure

```
typedef struct {
    short boardNo;        // Number of the Thor-2 board
    Ulong lmbAddr;       // On-board Memory address (flat model)
} IoctlDrvReadMemT;
```

Output Data Structure

```
typedef struct {
    ThorRc rc;           // Function return code
    Ulong   value;        // Value of the memory location
} IoctlDrvReadMem32ReturnT;
```

Possible Return Codes

THOR_SUCCESS

Equivalent LAPI Function

drvReadMem()



See Also

IOCTL_DRV_READ_MEM
IOCTL_DRV_WRITE_MEM

12.1.27 IOCTL_DRV_READ_MEM_BLOCK

Synopsis

Copies a block of data from the on-board memory to a buffer in the host memory.

Input Data Structure

```
typedef struct {  
    short boardNo;           // Number of the Thor-2 board  
    Ulong lmbAddr;          // Local (on-board) Memory address (flat model)  
    Uint count;             // Number of bytes to be processed  
} IoctlDrvMemBlockT;
```

Output Data Structure

```
Byte buf[count];           // Count bytes copied from the on-board memory.
```

Possible Return Codes

N/A

Equivalent LAPI Function

drvReadMemBlock()

See Also

IOCTL_DRV_WRITE_MEM_BLOCK

12.1.28 IOCTL_DRV_RESET_DEVICES

Synopsis

Resets (provides a pulse on the reset pins) the following Thor-2 devices:

- Line Interfaces (LI0 and LI1)
- Time-Space Switch (TSS)
- HDLC Controller (HDLC)
- Codecs (CD0 and CD1)

Input Data Structure

```
short                  // boardNo - number of the Thor-2 board
```



Output Data Structure

ThorRc // Function Return code

Possible Return Codes

THOR_SUCCESS	// OK
THOR_INVALID_BOARD_NO	// Supplied board number is not valid

Equivalent LAPI Function

drvResetDevices()

See Also

IOCTL_DRV_RESET_DRIVER

12.1.29 IOCTL_DRV_RESET_DRIVER

Synopsis

Resets the Driver software. Clears and re-initializes the internal data structures.

Input Data Structure

NULL

Output Data Structure

ThorRc // Function Return code

Possible Return Codes

THOR_SUCCESS	// OK
--------------	-------

Equivalent LAPI Function

drvResetDriver()

See Also

IOCTL_DRV_RESET_DEVICES

12.1.30 IOCTL_DRV_RESET_HDLC

Synopsis

Resets the HDLC device. Used internally within the driver.



Input Data Structure

```
short boardNo      // Board number hosting the HDLC device
```

Output Data Structure

```
ThorRc           // Function Return code
```

Possible Return Codes

```
THOR_SUCCESS      // OK
```

Equivalent LAPI Function

-

See Also

-

12.1.31 IOCTL_DRV_SET_CLK_SRC

Synopsis

Sets the clock source for the Thor-2 board. All the internal data highways are synchronized and run from the same master clock. The possible clock sources are defined by *ThorClkSrcType*.

Input Data Structure

```
typedef struct {
    short boardNo;          // Number of the Thor-2 board
    short clkSrc;           // TSS clock source to be used (ThorClkSrcType)
} IoctlDrvSetClkSrcT;
```

Output Data Structure

```
ThorRc           // Function Return code
```

Possible Return Codes

```
THOR_SUCCESS      // OK
THOR_TSS_INVALID_TIMING_MODE // The provided Clock Source is not valid
                             // See ThorClkSrcType for valid values
THOR_INVALID_BOARD_NO     // Supplied board number is not valid
```

Equivalent LAPI Function

```
drvSetClkSrc()
```



12.1.32 IOCTL_DRV_SETUP

Synopsis

Provides the driver the communications parameters to be used with the Thor-2 board(s). This function only needs to be called in DOS. In Windows 95 and Windows NT the information is available to the driver from the Windows Registry.

NOTE: This function is included in the SAPI so that the Registry values can be overwritten from the application. This function should normally not be used.

Input Data Structure

```
typedef struct {
    short ioBaseAddr;           // I/O-base address of the Thor-2 Board
    short noOfBoards;          // Number of Boards installed (up to 4).
    short irq;                 // IRQ for all the installed THOR boards
    Word infoBufferSize;       // Size of driver fifo
} IoctlDrvSetupT;
```

Output Data Structure

```
ThorRc                      // Function Return code
```

Possible Return Codes

THOR_SUCCESS	// OK
THOR_INVALID_BOARD_NO	// The supplied board number is not valid
THOR_INVALID_IRQ_NO	// The supplied IRQ number is not valid
THOR_INVALID_ADDR	// The supplied I/O-Base address is not valid

Equivalent LAPI Function

```
drvSetup()
```

See Also

IOCTL_DRV_INIT

12.1.33 IOCTL_DRV_SETUP_IO_WIN

Synopsis

Initializes the sliding I/O window by setting the Host I/O Offset (HIO register) and the host I/O Window Size (IWS register).



With DOS driver this function must be called before any memory window functions are called. In Windows 95 and Windows NT use of this function is not necessary as the information is available to the driver from the Windows Registry.

NOTE: This function is included in the SAPI so that the Registry values can be overwritten from the application. This function should normally not be used.

Input Data Structure

```
typedef struct {  
    short boardNo;           // Number of the Thor-2 board  
    short hostIoOffset;      // Absolute offset address for the sliding window  
                           // in the host I/O-address space  
    short hostIoWindowSize; // Size of the window (Bytes) in the host  
                           // I/O-address space.  
} IoctlDrvSetupIoWinT;
```

Output Data Structure

```
ThorRc          // Function Return code
```

Possible Return Codes

```
THOR_SUCCESS          // OK  
THOR_INVALID_HOST_IO_OFFSET // The provided host I/O offset value is invalid  
THOR_INVALID_IO_WINDOW_SIZE // The provided I/O window size is invalid  
THOR_INVALID_BOARD_NO   // Supplied board number is not valid
```

Equivalent LAPI Function

```
drvSetupIoWin()
```

See Also

[IOCTL_DRV_SETUP_MEM_WIN](#)

Synopsis

Initializes the memory window by setting the host memory offset (HMO register) and the host memory window size (MWS register).

With DOS driver this function must be called before any memory window functions are called. In Windows 95 and Windows NT use of this function is not necessary as the information is available to the driver from the Windows Registry.

NOTE: This function is included in the SAPI so that the Registry values can be overwritten from the application. This function should normally not be used.



Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board
    Ulong hostMemoryOffset; // Absolute starting addresses of the memory
                           // in the host memory address space
                           // (e.g. 0x0D0000).
    Ulong hostMemoryWindowSize // Size (no of bytes) of the memory window
                               // in the host memory address space
                               // (256 <= size <= 16MByte). Typical values:
                               // 16kBytes, 32kBytes, or 64kBytes.
} IoctlDrvSetupMemWinT;
```

Output Data Structure

```
ThorRc          // Function Return code
```

Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_INVALID_HOST_MEM_OFFSET // The provided host memory offset
                             // value is invalid
THOR_INVALID_MEM_WINDOW_SIZE // The provided memory window size is invalid
THOR_INVALID_BOARD_NO    // Supplied board number is not valid
```

Equivalent LAPI Function

```
drvSetupMemWin()
```

See Also

```
IOCTL_DRV_SETUP_IO_WIN
```

12.1.35 IOCTL_DRV_START_EVENT_NOTIFICATIONS

Synopsis

Begins the event notifications from the driver. Once activated, the driver will send a WIN32 Event to the application upon reception of a message or a Hardware/Line status change. This mechanism allows applications to be written in event driver fashion.

Input Data Structure

```
HANDLE // Windows Event Handle created by the application
```

Output Data Structure

```
ThorRc
```



Return Codes

THOR_SUCCESS

Equivalent LAPI Function

drvRegisterCallback()

See Also

IOCTL_DRV_START_EVENT_NOTIFICATIONS

12.1.36 IOCTL_DRV_STOP_EVENT_NOTIFICATIONS

Synopsis

Stops the event notifications from the driver. Should be called at the end of the application.

Input Data Structure

NULL

Output Data Structure

ThorRc

Return Codes

THOR_SUCCESS

Equivalent LAPI Function

drvCleanup()

See Also

IOCTL_DRV_STOP_EVENT_NOTIFICATIONS

12.1.37 IOCTL_DRV_STATUS_2_STR

Synopsis

Converts a status code to a string. Returns a string describing the status code in a general fashion. Can be used for “quick and dirty” solutions when the status code is not properly analyzed by the application, but at least something needs to be displayed to the user.



Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board
    short liNo;              // Number of the Line Interface
    ThorStatusType statusCode; // Status code to be converted to a string
} IoctlDrvStatus2StrT
```

Output Data Structure

```
typedef struct {
    ThorRc rc;                // Function Return code
    char str[IOCTL_DRV_RETURN_STR_LEN_MAX+1]; // Status string
    short strLen;             // Length of the returned string
} IoctlDrvStringReturnT;
```

Return Codes

THOR_SUCCESS	
THOR_DATA_TOO_LARGE	// Status string is larger than the reserved // buffer in the Output Data Structure

Equivalent LAPI Function

drvStatus2Str()

See Also

IOCTL_DRV_THOR_RC_2_STR

12.1.38 IOCTL_DRV_THOR_RC_2_STR

Synopsis

Converts a ThorRc code to a string. Returns a string describing the error code in a general fashion. Can be used for “quick and dirty” solutions when the return code is not properly analyzed by the application, but at least something needs to be displayed to the user.

Input Data Structure

```
ThorRc      // errCode - Return Code to be converted to a string
```

Output Data Structure

```
typedef struct {
    ThorRc rc;                // Function Return code
    char str[IOCTL_DRV_RETURN_STR_LEN_MAX+1]; // Corresponding string
    short strLen;             // Length of the returned string
} IoctlDrvStringReturnT;
```



```
} IoctlDrvStringReturnT;
```

Possible Return Codes

THOR_SUCCESS	
THOR_DATA_TOO_LARGE	// Status string is larger than the reserved // buffer in the Output Data Structure
THOR_INVALID_RETURN_CODE	// The return code passed to the function is not // valid.

Equivalent LAPI Function

drvThorRc2Str()

See Also

IOCTL_DRV_STATUS_2_STR

12.1.39 IOCTL_DRV_REG_VALUES

Synopsis

Return the board communication and configuration information stored in the Windows Registry.

Input Data Structure

NULL

Output Data Structure

```
typedef struct {
    ThorRc    rc;                      // Function return code
    short     irq;                     // IRQ used by the VxD
    short     ioBaseAddr;              // I/O Base Address used
    short     noOfBoards;              // Number of Boards Installed
    Uint      infoBufferSize;          // Size of the message FIFO
    Ulong    memWinOffset[BOARD_PER_PC]; // Memory Window Offset for Board X
    Ulong    memWinSize[BOARD_PER_PC];   // Memory Window Offset for Board X
    Word     ioWinOffset[BOARD_PER_PC]; // I/O Window Offset for Board X
    Word     ioWinSize[BOARD_PER_PC];   // I/O Window Size for Board X
    Ulong    brdDramSize[BOARD_PER_PC]; // DRAM memory installed on board
} IoctlDrvVxDRegValuesReturnT;
```

Possible Return Codes

```
THOR_SUCCESS           // OK
```



Equivalent LAPI Function

drvReadDriverData()

See Also

IOCTL_DRV_VXD_STATUS

12.1.40 IOCTL_DRV_STATUS

Synopsis

Return the status of the VxD driver and the installed boards.

Input Data Structure

NULL

Output Data Structure

```
typedef struct {
    ThorRc    rc;                      // Function return code
    ThorRc    vxdStatus;                // Overall status of the VxD
    ThorRc    boardStatus[BOARD_PER_PC]; // Individual board statuses
    short     failedFunction[BOARD_PER_PC]; // IOCTL code indicating which function
                                              // has failed last if the board is not OK
} IoctlDrvVxDStatusReturnT;
```

Possible Return Codes

THOR_SUCCESS // OK

Equivalent LAPI Function

drvGetStatus()
drvGetBoardStatus()

See Also

IOCTL_DRV_VXD_REG_VALUES

12.1.41 IOCTL_DRV_WRITE_CONFIG_DATA

Synopsis

Stores the Thor-2 T1/E1 configuration data persistently into the on-board flash



memory.

Input Data Structure

```
typedef struct {  
    short      boardNo;      // Number of the Thor-2 board  
    ThorConfigT cfgData;    // Configuration data to be written  
} IoctlDrvWriteConfigDataT;
```

Output Data Structure

```
ThorRc           // Function return code
```

Possible Return Codes

```
THOR_SUCCESS          // OK  
THOR_FLASH_ERASE_ERR // Failed to erase the Flash Sector  
THOR_FLASH_WRITE_ERR // Write to the flash failed  
THOR_FLASH_CONFIG_ERR // Configuration did not complete successfully  
THOR_INVALID_BOARD_NO // Supplied board number is not valid
```

Equivalent LAPI Function

```
drvWriteConfigData()
```

See Also

```
IOCTL_DRV_READ_CONFIG_DATA
```

12.1.42 IOCTL_DRV_WRITE_IO

Synopsis

Writes a byte (8 bits) to an I/O-port in an on-board device.

Input Data Structure

```
typedef struct {  
    short boardNo;          // Number of the Thor-2 board  
    Uint portId;           // On-board I/O-port address  
    Uint value;             // Byte Value (8 bits) to be written to the I/O port  
} IoctlDrvWriteIoT;
```

Output Data Structure

```
ThorRc           // Function Return code
```

Possible Return Codes

```
THOR_SUCCESS
```



Equivalent LAPI Function

See Also

drvReadIo()

12.1.43 IOCTL_DRV_WRITE_MEM

Synopsis

Write a Word (16 bits) to the on-board memory (DRAM) location.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board
    Ulong lmbAddr;          // On-board Memory address (flat model)
    Word value;             // Word (16-bit) value to be written
} IoctlDrvWriteMemT;
```

Output Data Structure

```
ThorRc                  // Function Return code
```

Possible Return Codes

```
THOR_SUCCESS           // OK
```

Equivalent LAPI Function

drvWriteMem()

See Also

```
IOCTL_DRV_WRITE_MEM8
IOCTL_DRV_WRITE_MEM32
IOCTL_DRV_READ_MEM
```

12.1.44 IOCTL_DRV_WRITE_MEM8

Synopsis

Writes a Byte (8 bits) to the on-board memory (DRAM) location.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board
```



```
    Ulong lmbAddr;           // On-board Memory address (flat model)
    Byte value;             // Byte (8-bit) value to be written
} IoctlDrvWriteMem8T;
```

Output Data Structure

ThorRc // Function Return code

Possible Return Codes

THOR_SUCCESS // OK

Equivalent LAPI Function

drvWriteMem8()

See Also

IOCTL_DRV_WRITE_MEM
IOCTL_DRV_WRITE_MEM32
IOCTL_DRV_READ_MEM

12.1.45 IOCTL_DRV_WRITE_MEM32

Synopsis

Writes a Double-Word (32 bits) to the on-board memory (DRAM) location.

Input Data Structure

```
typedef struct {
    short boardNo;          // Number of the Thor-2 board
    Ulong lmbAddr;          // On-board Memory address (flat model)
    Ulong value;            // Double-Word (32-bit) value to be written
} IoctlDrvWriteMem32T
```

Output Data Structure

ThorRc // Function Return code

Possible Return Codes

THOR_SUCCESS

Equivalent LAPI Function

drvWriteMem32()



See Also

`IOCTL_DRV_WRITE_MEM`
`IOCTL_DRV_WRITE_MEM8`
`IOCTL_DRV_READ_MEM`

12.1.46 IOCTL_DRV_WRITE_MEM_BLOCK

Synopsis

Copies a block of data from a buffer in the host memory into the on-board memory.

Caveat: Only works for block sizes smaller than the memory window size.

Input Data Structure

A buffer containing the following data:

```
short boardNo // Number of the Thor-2 board
Ulong lmbAddr // On-board memory starting address for writing
Uint count    // Length of the databuffer to be written to the on-board memory
Byte[count]   // databuffer to be written (count number of Bytes)
```

Output Data Structure

`ThorRc` // Function Return code

Possible Return Codes

<code>THOR_SUCCESS</code>	// OK
<code>THOR_DATA_TOO_LARGE</code>	// Attempted to fill a memory block that is larger // than the memory window size

Equivalent LAPI Function

`drvWriteMemBlock()`

See Also

`IOCTL_DRV_READ_MEM_BLOCK`
`IOCTL_DRV_CMP_MEM_BLOCK`



12.2 Line Interface (LI) Operations

12.2.1 IOCTL_LI_ALARM_OFF

Synopsis

Stops sending a previously initiated alarm towards the remote end. The alarm sending can be turned on with *IOCTL_LI_ALARM_ON*.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the board hosting the Line Interface
                            // transceiver
    short liNo;              // Number of the Line Interface transceiver
    LiAlarmType alarmType;   // Alarm type to turn on or off
} IoctlLiAlarmT;
```

Output Data Structure

```
ThorRc           // Function return code
```

Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_INVALID_ALARM_TYPE // The provided alarm type is not a valid type
THOR_WRONG_CONTEXT      // The provided alarm type is not available in the
                        // current Li mode
THOR_INVALID_BOARD_NO    // Function was supplied an invalid board number
THOR_INVALID_LI_NO        // Function was supplied an invalid LI number
```

Equivalent LAPI Function

```
liAlarmOff()
```

See Also

IOCTL_LI_ALARM_ON

12.2.2 IOCTL_LI_ALARM_ON

Synopsis

Initiates the sending of an alarm towards the remote end. The sending of an alarm will continue until turned off with *IOCTL_LI_ALARM_OFF*.



Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the board hosting the Line Interface
                            // transceiver
    short liNo;              // Number of the Line Interface transceiver
    LiAlarmType alarmType;   // Alarm type to turn on or off
} IOCTL_LI_ALARM_T;
```

Output Data Structure

```
ThorRc                  // Function return code
```

Possible Return Codes

```
THOR_SUCCESS            // OK
THOR_INVALID_ALARM_TYPE // The provided alarm type is not a valid type
THOR_WRONG_CONTEXT      // The provided alarm type is not available in the
                        // current LI mode
THOR_INVALID_BOARD_NO   // Function was supplied an invalid board number
THOR_INVALID_LI_NO       // Function was supplied an invalid LI number
```

Equivalent LAPI Function

```
liAlarmOn()
```

See Also

```
IOCTL_LI_ALARM_OFF
```

12.2.3 IOCTL_LI_BIT_ROB_ACCESS_DISABLE

Synopsis

Disables the sending and receiving of bit-robbed signalling data.

NOTE: Only meaningful in T1 mode.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the board hosting the Line Interface transceiver
    short liNo;              // Number of the Line Interface transceiver
} IOCTL_LI_T;
```

Output Data Structure

```
ThorRc                  // Function return code
```



Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_WRONG_CONTEXT    // Bit Rob Data is not available in E1 Mode
THOR_INVALID_BOARD_NO // Function was supplied an invalid board number
THOR_INVALID_LI_NO     // Function was supplied an invalid LI number
```

Equivalent LAPI Function

```
liBitRobAccessDisable()
```

See Also

```
IOCTL_LI_BIT_ROB_ACCESS_ENABLE
IOCTL_LI_SET_BIT_ROB_DATA
```

12.2.4 IOCTL_LI_BIT_ROB_ACCESS_ENABLE

Synopsis

Enables the user to send and receive bit-robbed signalling data. Bit Robbing can be used in F12, ESF, and F72 frame formats (T1 only). In F12 and F72 there are two signaling channels called A and B. In ESF format there are four signaling channels: A, B, C, and D. The received signalling data is passed to the user via the `drvRead()` function (See the *ThorFrameType: THOR_FM_BRS*). To transmit bit-robbed signaling data, use the function `IOCTL_LI_SET_BIT_ROB_DATA`.

If a certain time-slot is used for data traffic, it cannot be overwritten with bit-robbing data, and those time slots should be defined as “Clear Channels” (see the Clear-Channel parameter in the T2config configuration file). If a time-slot (channel) is defined as a Clear Channel it will not be overwritten by bit robbing or Zero Code Suppression (ZCS, B7 stuffing).

NOTE: Only meaningful in T1 mode, and in F12, ESF, and F72 frame formats.

Input Data Structure

```
typedef struct {
    short boardNo;      // Number of the board hosting the Line Interface transceiver
    short liNo;         // Number of the Line Interface transceiver
} IoctlLiT;
```

Output Data Structure

```
ThorRc                  // Function return code
```

Possible Return Codes

```
THOR_SUCCESS          // OK
```



```

THOR_WRONG_CONTEXT    // Bit Rob Data is not available in E1 Mode
THOR_NOT_SETUP        // The LI has not been configured with for a frame
                      // format that supports Bit Robbing
THOR_INVALID_BOARD_NO // Function was supplied an invalid board number
THOR_INVALID_LI_NO    // Function was supplied an invalid LI number

```

Equivalent LAPI Function

libitRobAccessEnable()

See Also

`IOCTL_LI_BIT_ROB_ACCESS_DISABLE`
`IOCTL_LI_SET_BIT_ROB_DATA`

12.2.5 IOCTL_LI_CONFIGURE

Synopsis

Initializes one Line Interface Transceiver for E1 or T1 mode. The configuration parameters to be used are passed to the function with the *liConfigOptions* argument. The configuration options to be used can first be read from the flash with the *IOCTL_DRV_READ_CONFIG_DATA* function, or can later be stored to the flash memory with the *IOCTL_DRV_WRITE_CONFIG_DATA* function.

Input Data Structure

```

typedef struct {
    short boardNo;    // Number of the board hosting the Line Interface transceiver
    short liNo;       // Number of the Line Interface transceiver
    LiMode liMode;   // Mode to be configured to: THOR_T1 or THOR_E1
    LiConfigOptionsT liConfigOptions; // Configuration parameters to be used
} IoctlLiConfigureT;

```

Output Data Structure

```

ThorRc                  // Function return code

```

Possible Return Codes

```

THOR_SUCCESS                // OK
THOR_LI_INVALID_MODE        // The provided LI Mode is invalid (not T1 or E1)
THOR_LI_INVALID_CLOCK_MODE  // The provided LI clock mode is not a valid mode
THOR_LI_INVALID_RESYNCR_OPTION // The provided LI Auto Resynchronization
                                // configuration option is not a valid option
THOR_LI_INVALID_TRANSMIT_LINE_CODE // The provided LI Transmit line code is
                                    // not a valid code
THOR_LI_INVALID_RECEIVE_LINE_CODE // The provided LI Receive line code is not

```



```
// a valid code
THOR_LI_INVALID_AIS_DETECTION_OPTION // The provided LI AIS detection option
// is not a valid option
THOR_LI_INVALID_TRANSMIT_FRAME_FORMAT // The provided LI Transmit Frame Format
// is not a valid format
THOR_LI_INVALID_RECEIVE_FRAME_FORMAT // The provided LI Receive Frame Format
// is not a valid format
THOR_LI_INVALID_HDB3_ERROR_OPTION // The provided LI HDB3 Error Detection
// option is not a valid option
THOR_LI_INVALID_REGAIN_MULTI_FRAME_OPTION // The provided LI Regain Multi
// Frame option is not a valid option
THOR_LI_INVALID_REMOTE_ALARM_OPTION // The provided LI Remote Alarm option is
// not a valid option
THOR_LI_INVALID_TRANSMIT_POWER_OPTION // The provided LI Transmit Power option
// is not a valid option
THOR_LI_INVALID_RECEIVE_EQUALIZER_OPTION // The provided LI Receive Equalizer
// option is not a valid option
THOR_LI_INVALID_SIGNALING_MODE // The provided LI Signaling mode is not a
// valid mode
THOR_LI_INVALID_FRAME_FORMAT // The provided LI Frame Format is not a valid
// format
THOR_LI_INVALID_TRANSMIT_REMOTE_ALARM_FORMAT // The provided LI Transmit
// Remote Alarm Format is not a valid format
THOR_LI_INVALID_RECEIVE_REMOTE_ALARM_FORMAT // The provided LI Receive Remote
// Alarm Format is not a valid format
THOR_INVALID_BOARD_NO // Function was supplied an invalid board number
THOR_INVALID_LI_NO // Function was supplied an invalid LI number
```

Equivalent LAPI Function

liConfigure()

See Also

IOCTL_DRV_READ_CONFIG_DATA
IOCTL_DRV_WRITE_CONFIG_DATA

12.2.6 IOCTL_LI_EXISTENCE_CHK

Synopsis

Attempts to read certain registers in the line interfaces and verifies that they contain the default values. The registers should contain the default values after reset. This function can be used to test if a board is present or to test that the Line Interface transceiver circuits are functional.

***Input Data Structure***

```
typedef struct {
    short boardNo;      // Number of the board hosting the Line Interface transceiver
    short liNo;         // Number of the Line Interface transceiver
} IoctlLit;
```

Output Data Structure

```
ThorRc           // Function return code
```

Possible Return Codes

THOR_SUCCESS	// The registers contain the default values
THOR_NON_DEFAULT_LI	// Non default values read. Either there is // no Thor-2 board present or the LIs are // not functioning properly.
THOR_INVALID_BOARD_NO	// Function was supplied an invalid board number
THOR_INVALID_LI_NO	// Function was supplied an invalid LI number

Equivalent LAPI Function

```
liExistenceChk()
```

See Also

IOCTL_DRV_BOARD_EXISTENCE

12.2.7 IOCTL_LI_FORCE_RESYNCH***Synopsis***

Initiates the resynchronization procedure of the pulse frame and the CRC-multiframe starting directly after the old framing candidate.

Input Data Structure

```
typedef struct {
    short boardNo;      // Number of the board hosting the Line Interface transceiver
    short liNo;         // Number of the Line Interface transceiver
} IoctlLit;
```

Output Data Structure

```
ThorRc           // Function return code
```

Possible Return Codes

THOR_SUCCESS	// OK
THOR_INVALID_BOARD_NO	// Function was supplied an invalid board number



```
THOR_INVALID_LI_NO           // Function was supplied an invalid LI number
```

12.2.8 IOCTL_LI_GET_BIT_ROB_DATA

Synopsis

Gets the bit robbing signalling information.

NOTE: Only meaningful in T1 mode

Input Data Structure

```
typedef struct {
    short boardNo;      // Number of the board hosting
                        // the Line Interface transceiver
    short liNo;        // Number of the Line Interface transceiver
} IoctlLiT;
```

Output Data Structure

```
typedef struct {
    ThorRc      rc;        // Function Return Code
    LiBrData   brData;    // Received Bit-rob signalling data
} IoctlLiGetBitRobDataReturnT;
```

Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_WRONG_CONTEXT    // The operation is not available in T1 mode
THOR_INVALID_BOARD_NO // Function was supplied an invalid board number
THOR_INVALID_LI_NO     // Function was supplied an invalid LI number
```

Equivalent LAPI Function

```
liGetBitRobData()
```

See Also

IOCTL_LI_SET_BIT_ROB_DATA

12.2.9 IOCTL_LI_GET_SA_BIT_VALUE

Synopsis

Retrieves the value to of the received SaX bits. Returns a byte (8-bits) received during the last CRC-Multiframe.

NOTE: Only meaningful in E1 mode

***Input Data Structure***

```
typedef struct {
    short      boardNo; // Number of the board hosting the Line
                      // Interface transceiver
    short      liNo;   // Number of the Line Interface transceiver
    LiSaBit    saBit;  // Sa bit to use
} IoctlLiGetSaBitValueT;
```

Output Data Structure

```
typedef struct {
    ThorRc      rc;        // Function Return Code
    Byte        saVal;     // Sa byte received. LSB first.
} IoctlLiGetSaBitValueReturnT;
```

Possible Return Codes

```
THOR_SUCCESS           // OK
THOR_WRONG_CONTEXT    // The operation is not available in T1 mode
THOR_INVALID_BOARD_NO // Function was supplied an invalid board number
THOR_INVALID_LI_NO     // Function was supplied an invalid LI number
```

Equivalent LAPI Function

liGetSaBitValue()

See Also

IOCTL_LI_SET_SI_BIT_VALUE
IOCTL_LI_SA_BIT_ACCESS_DISABLE
IOCTL_LI_SA_BIT_ACCESS_ENABLE

12.2.10 IOCTL_LI_GET_SI_BIT_VALUE***Synopsis***

Retrieves the value of the Si bits received during the last frame. In Doubleframe format, these are the first bits of each frame. In CRC-Multiframe format, the Si bit are the first bits of frames 13 and 15. In CRC-Multiframe format these bits are also known as the E-bits of spare bits for international use.

NOTE: Only meaningful in E1 mode

Input Data Structure

```
typedef struct {
    short boardNo; // Number of the board hosting the Line Interface transceiver
    short liNo;   // Number of the Line Interface transceiver
```



```
} IOCTLLiT;
```

Output Data Structure

```
typedef struct {
    ThorRc      rc;          // Function Return Code
    Byte        silVal;       // Value of the FAS Si-bit in doubleframe format
                           // or Si (E) bit in frame 13 in CRC-multiframe format
    Byte        si2Val;       // Value of the service word Si bit in DoubleFrame format
                           // or Si (E) bit in frame 15 in CRC-multiframe format
} IOCTLLiGetValueReturnT;
```

Possible Return Codes

```
THOR_SUCCESS           // OK
THOR_WRONG_CONTEXT     // The operation is not available in T1 mode
THOR_INVALID_BOARD_NO   // Function was supplied an invalid board number
THOR_INVALID_LI_NO       // Function was supplied an invalid LI number
```

Equivalent LAPI Function

```
liGetSiBitValue()
```

See Also

```
IOCTL_LI_SET_SI_BIT_VALUE
```

12.2.11 IOCTL_LI_GET_STATUS

Synopsis

Checks and returns the physical line status of the T1/E1 line interface.

Input Data Structure

```
typedef struct {
    short boardNo;    // Number of the board hosting the Line Interface transceiver
    short liNo;        // Number of the Line Interface transceiver
} IOCTLLiT;
```

Output Data Structure

```
ThorRc                  // Function return code
```

Possible Return Codes

```
THOR_L1_OK            // Physical Layer is up
THOR_L1_DOWN          // Physical Layer is down
THOR_INVALID_BOARD_NO   // Function was supplied an invalid board number
```



```
THOR_INVALID_LI_NO           // Function was supplied an invalid LI number
```

Equivalent LAPI Function

```
liGetStatus()
```

12.2.12 IOCTL_LI_LOOP

Synopsis

Loops the Line Interface receive and transmit lines; I.e. received E1/T1 data will be transmitted back on the transmit pairs.

Input Data Structure

```
typedef struct {
    short boardNo;          // Board number.
    short liNo;             // Line Interface number
    LiLoopT loopType;       // Loop Type: Line loop or Remote loop
} IoctlLiLoopT;
```

Output Data Structure

```
ThorRc                  // Function return code
```

Possible Return Codes

```
THOR_SUCCESS            // OK
THOR_INVALID_LOOP_TYPE // The provided loop type is not valid
THOR_INVALID_BOARD_NO   // Function was supplied an invalid board number
THOR_INVALID_LI_NO       // Function was supplied an invalid LI number
```

Equivalent LAPI Function

```
liLoop()
```

12.2.13 IOCTL_LI_SA_BIT_ACCESS_DISABLE

Synopsis

Disables the sending of the Sa-bit values specified with the *IOCTL_LI_SET_SA_BIT_VALUE* function.

NOTE: Only meaningful in E1 mode

Input Data Structure

```
typedef struct {
```



```
    short boardNo; // Number of the board hosting the Line Interface transceiver
    short liNo; // Number of the Line Interface transceiver
} IoctlLit;
```

Output Data Structure

```
ThorRc // Function return code
```

Possible Return Codes

```
THOR_SUCCESS // OK
THOR_WRONG_CONTEXT // The operation is not available in T1 mode
THOR_INVALID_BOARD_NO // Function was supplied an invalid board number
THOR_INVALID_LI_NO // Function was supplied an invalid LI number
```

Equivalent LAPI Function

```
liSaBitAccessDisable()
```

See Also

```
IOCTLE_LI_SA_BIT_ACCESS_ENABLE
IOCTL_LI_SET_SA_BIT_VALUE
IOCLT_LI_GET_SA_BIT_VALUE
```

12.2.14 IOCTL_LI_SA_BIT_ACCESS_ENABLE

Synopsis

Enables the sending the Sa-bit values specified with the IOCTL_LI_SET_SA_BIT_VALUE function.

NOTE: Only meaningful in E1 mode

Input Data Structure

```
typedef struct {
    short boardNo; // Number of the board hosting the Line Interface transceiver
    short liNo; // Number of the Line Interface transceiver
} IoctlLit;
```

Output Data Structure

```
ThorRc // Function return code
```

Possible Return Codes

```
THOR_SUCCESS // OK
THOR_WRONG_CONTEXT // The operation is not available in T1 mode
```



```
THOR_INVALID_BOARD_NO    // Function was supplied an invalid board number
THOR_INVALID_LI_NO        // Function was supplied an invalid LI number
```

Equivalent LAPI Function

```
liSaBitAccessEnable()
```

See Also

```
IOCTL_LI_SET_SA_BIT_VALUE
IOCTL_LI_GET_SA_BIT_VALUE
IOCTL_LI_SA_BIT_ACCESS_DISABLE
```

12.2.15 IOCTL_LI_SET_BIT_ROB_DATA

Synopsis

If Bit robbing has been enabled with a successful call to *IOCTL_LI_BIT_ROB_ACCESS_ENABLE*, then this function will transmit the bit robbed signaling data passed to this function. The same data will be sent continuously until this function has been called again to change the data. However, when called repeatedly, every data will be sent in at least one frame. If the function is called before the transmitting of the previous data has been transmitted at least once, the function will return THOR_TX_BUSY

NOTE: Only meaningful in T1 mode.

Input Data Structure

```
typedef struct {
    short      boardNo;    // Number of the Thor-2 board hosting the LI
    short      liNo;       // Number of the Line Interface
    LiBrData   brData;    // Bit-robbed signalling data to be transmitted
} IoctlLiBitRobDataT;
```

Output Data Structure

```
ThorRc                  // Function return code
```

Possible Return Codes

```
THOR_SUCCESS            // OK
THOR_WRONG_CONTEXT     // Bit Rob Signalling is only available in T1 mode
THOR_NOT_SETUP          // The LI has not been configured for a frame
                        // format that supports Bit Robbing
THOR_TX_BUSY            // The previously specified data has not yet been
                        // transmitted. Try again later
THOR_INVALID_BOARD_NO   // Function was supplied an invalid board number
```



```
THOR_INVALID_LI_NO           // Function was supplied an invalid LI number
```

Equivalent LAPI Function

```
liSetBitRobData()
```

See Also

```
IOCTL_LI_BIT_ROB_ACCESS_ENABLE  
IOCTL_LI_BIT_ROB_ACCESS_DISABLE
```

12.2.16 IOCTL_LI_SET_CLK_MODE

Synopsis

Sets a Line Interface Transceiver as a Clock Master or a Clock Slave.

Input Data Structure

```
typedef struct {  
    short      boardNo;   // Number of the board hosting the Line Interface  
                        // transceiver  
    short      liNo;     // Number of the Line Interface transceiver  
    LiClkMode clkMode;  // Clock Mode  
} IoctlLiSetClkModeT;
```

Output Data Structure

```
ThorRc                  // Function return code
```

Possible Return Codes

```
THOR_SUCCESS            // OK  
THOR_LI_INVALID_CLOCK_MODE // The provided clock mode is not a valid mode  
THOR_INVALID_BOARD_NO   // Function was supplied an invalid board number  
THOR_INVALID_LI_NO       // Function was supplied an invalid LI number
```

Equivalent LAPI Function

```
liSetClkMode()
```

12.2.17 IOCTL_LI_SET_SA_BIT_VALUE

Synopsis

Sets the value to be sent at the SaX bits. Eight bits to be sent can be specified per Sa-bit. In CRC-Multiframe format, one bit is sent in the corresponding Sa-bit location of time-slot 0 in every other frame (in frames that do not contain frame alignment



information). The least significant bit of the saVal byte is sent first in the frame number 1 of the multiframe and the most significant bit of the Byte is sent last in the frame number 15 of the multiframe.

In Doubleframe format one bit of the saVal word is sent in the every other frame starting from the least significant bit.

NOTE: Only meaningful in E1 mode

Input Data Structure

```
typedef struct {
    short      boardNo;    // Number of the board hosting the Line
                           // Interface transceiver
    short      liNo;       // Number of the Line Interface transceiver
    LiSaBit    saBit;     // Sa bit to use
    Byte       saVal;     // word to be sent. LSB first.
} IoctlLiSetSaBitValueT;
```

Output Data Structure

```
ThorRc           // Function return code
```

Possible Return Codes

THOR_SUCCESS	// OK
THOR_WRONG_CONTEXT	// The operation is not available in T1 mode
THOR_INVALID_BOARD_NO	// Function was supplied an invalid board number
THOR_INVALID_LI_NO	// Function was supplied an invalid LI number

Equivalent LAPI Function

```
liSetSaBitValue()
```

See Also

```
IOCTL_LI_GET_SA_BIT_VALUE
IOCTL_LI_SA_BIT_ACCESS_ENABLE
IOCTL_LI_SA_BIT_ACCESS_DISABLE
```

12.2.18 IOCTL_LI_SET_SI_BIT_VALUE

Synopsis

Sets the value to be sent at the Si bit positions. In Doubleframe format, these are the first bits of each frame. In CRC-Multiframe format, the Si bits are the first bits of frames 13 and 15. In CRC-Multiframe format these bits are also known as the E-bits or Spare bits for International use.



NOTE: Only meaningful in E1 mode

Input Data Structure

```
typedef struct {  
    short boardNo;           // Number of the Thor-2 board hosting the LI  
    short liNo;              // Number of the Line Interface  
    Byte silVal;             // Value of the FAS Si-bit in doubleframe format  
                           // or Si (E) bit in frame 13 in CRC-multiframe format  
    Byte si2Val;             // Value of the service word Si bit in DoubleFrame format  
                           // or Si (E) bit in frame 15 in CRC-multiframe format  
} IoctlLiSetSiBitValueT;
```

Output Data Structure

```
ThorRc                  // Function return code
```

Possible Return Codes

```
THOR_SUCCESS            // OK  
THOR_WRONG_CONTEXT      // The operation is not available in T1 mode  
THOR_INVALID_BOARD_NO   // Function was supplied an invalid board number  
THOR_INVALID_LI_NO       // Function was supplied an invalid LI number
```

Equivalent LAPI Function

```
liSetSiBitValue()
```

See Also

```
IOCTL_LI_GET_SI_BIT_VALUE
```

12.2.19 IOCTL_LI_TRANSMIT_PIN_CONTROL

Synopsis

Enable or Disable (tri-state) the Transmit pair of the Line Interface.

Input Data Structure

```
typedef struct {  
    short      boardNo;    // Number of the Thor-2 board hosting the LI  
    short      liNo;       // Number of the Line Interface  
    short      enable;     // =1 to enable, =0 to disable (tri-state)  
} IoctlLiTransmitPinControlT;
```

Output Data Structure

```
ThorRc                  // Function return code
```



Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_INVALID_BOARD_NO // Function was supplied an invalid board number
THOR_INVALID_LI_NO    // Function was supplied an invalid LI number
```

Equivalent LAPI Function

liTransmitPinControl()

See Also

-



12.3 High-Level Data Control (HDLC) Operations

12.3.1 IOCTL_HDLC_INIT_PIPE

Synopsis

Initializes the HDLC Controller. A pipe can contain one time-slot, only certain bits of a time-slot (sub-channel), or several time-slots (super-channel). Each bit that is to be included in the pipe is passed as a bit rate mask (see HdlcPipeOpts). The bit rate mask is an array of 32 bytes, where index 0 is time-slot 0, etc. A ‘1’ in a bit position indicates that the corresponding bit in the time-slot if included in the pipe. A pipe needs to be configured before data or HDLC frames can be received or sent. The initialization of the time-slot assignment and the selected channel is performed in both TX and RX directions.

Input Data Structure

```
typedef struct {
    short      boardNo;    // Number of the Thor-2 board hosting
                           // the HDLC Controller
    short      pipeNo;    // Number of the Pipe (channel)
    HdlcPipeOpts pipeOpts; // Configuration options for the pipe
} IoctlHdclInitPipeT;
```

Output Data Structure

```
ThorRc           // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_TOO_MANY_PIPES   // The user has attempted to initialize more pipes
                      // than supported in this version
THOR_HDLC_AR_BUSY     // HDLC Controller is BUSY
THOR_INVALID_BOARD_NO  // Function was supplied an invalid Board number
THOR_HDLC_INVALID_PIPE_NO // Function was supplied an invalid Pipe number
```

Equivalent LAPI Function

```
hdlcInitPipe()
```

12.3.2 IOCTL_HDLC_SEND_ABORT

Synopsis

Aborts the currently transmitted frame (if there is one being transmitted). The frame is aborted by:



```

0x7F for HDLC mode
0x00 for TMB mode
0x0000 for TMR mode
pipeOpts.tflag for TMA (pipeOpts.flagAdjustment==TRUE)
0xFF for TMA (pipeOpts.flagAdjustment==FALSE)

```

To resume sending of frames, use the *IOCTL_HDLC_SEND_DATA* or *IOCTL_HDLC_SEND_PATTERN* functions.

Input Data Structure

```

typedef struct {
    short      boardNo;   // Number of the Thor-2 board hosting the
                          // HDLC Controller
    short      pipeNo;    // Number of the Pipe (channel)
} IoctlHdlcT;

```

Output Data Structure

```
ThorRc           // Function Return Code
```

Possible Return Codes

```

THOR_SUCCESS          // OK
THOR_HDLC_AR_BUSY    // HDLC Controller is BUSY
THOR_HDLC_INVALID_STATE_TRANS // The pipe is not in a valid state
                               // to perform this action
THOR_INVALID_BOARD_NO // Function was supplied an invalid Board number
THOR_HDLC_INVALID_PIPE_NO // Function was supplied an invalid Pipe number

```

Equivalent LAPI Function

```
hdlcSendAbort()
```

See Also

```
IOCTL_HDLC_SEND_DATA
IOCTL_HDLC_SEND_PATTERN
```

12.3.3 IOCTL_HDLC_SEND_DATA

Synopsis

Transmits transparent data or HDLC frames over the specified pipe.

Input Data Structure

```
typedef struct {
```



```

short boardNo;           // Number of the Thor-2 board hosting the
                        // HDLC Controller
short pipeNo;           // Number of the Pipe (channel)
Byte   data[HDLC_FRAME_LENGTH_MAX+1]; // Data to be sent
Word   dataLen;          // Length of the data
Bool   endOfData;        // TRUE if a Frame End should be sent after the data
} IoctlHdlcSendDataT;

```

Output Data Structure

ThorRc // Function Return Code

Possible Return Codes

THOR_SUCCESS	// OK, message has been successfully sent
THOR_TX_BUSY	// Transmitter not ready. Transmission of the // previous frame has not been completed. // Try again later.
THOR_HDLC_MSG_TOO_LONG	// The message (frame) is too long for the // current driver configuration.
THOR_HDLC_INVALID_TX_STATE	// The pipe is not in a valid transmit state
THOR_HDLC_INVALID_STATE_TRANS	// Function Internal error
THOR_INVALID_BOARD_NO	// Function was supplied an invalid Board number
THOR_HDLC_INVALID_PIPE_NO	// Function was supplied an invalid Pipe number

Equivalent LAPI Function

hdhcSendData()

See Also

IOCTL_DRV_READ

12.3.4 IOCTL_HDLC_SEND_PATTERN

Synopsis

Transmits data patterns (which can be HDLC frames or transparent data) continuously over a number of pipes. An array of patterns is passed as a parameter. This function will send each pattern in the array, starting with the first pattern in the array. When the last pattern in the array is sent it will wrap and send the first pattern again. Between each pattern a number of inter-frame time fill characters can be sent (as specified in HdlcDataPatternT). To stop sending the pattern, call either the *IOCTL_HDLC_SEND_ABORT* or the *IOCTL_HDLC_SEND_DATA* functions.

Input Data Structure

typedef struct {



```

short boardNo;           // Number of the Thor-2 board hosting the HDLC Controller
short pipeNo;            // Number of the Pipe (channel)
HdlcDataPatternT patterns[HDLC_NO_PATTERNS_MAX]; // Patterns for the pipes
short noOfPatterns;      // Number of patterns to be sent
} IOCTLHdLCSendPatternT;

```

Output Data Structure

ThorRc	// Function Return Code
--------	-------------------------

Possible Return Codes

THOR_SUCCESS	// Message accepted and is being sent
THOR_TX_BUSY	// Previous message not yet sent completely
	// Try again later
THOR_HDLC_MSG_TOO_LONG	// Message is too long to be sent
THOR_HDLC_INVALID_STATE_TRANS	// HDLC Invalid State Transition,
	// Driver Internal error
THOR_HDLC_AR_BUSY	// HDLC Controller is BUSY,
	// Driver internal error
THOR_INVALID_BOARD_NO	// Function was supplied an invalid Board number
THOR_HDLC_INVALID_PIPE_NO	// Function was supplied an invalid Pipe number

Equivalent LAPI Function

hdLCSendPattern()

See Also

IOCTL_HDLC_SEND_DATA
IOCTL_HDLC_SEND_ABORT
IOCTL_DRV_READ

12.3.5 IOCTL_HDLC_RECEIVE_OFF

Synopsis

Sets the receiver in the off condition for a configured pipe. When the receiver is turned off the HDLC controller can still receive frames, but they are discarded and not stored in the receive fifo.

Input Data Structure

```

typedef struct {
    short      boardNo;   // Number of the Thor-2 board hosting the
                          // HDLC Controller
    short      pipeNo;    // Number of the Pipe (channel)
} IOCTLHdLCt;

```



Output Data Structure

```
ThorRc           // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_HDLC_INVALID_RX_STATE // The Pipe is not in a valid receive state
THOR_HDLC_INVALID_STATE_TRANS // HDLC Invalid State Transition,
                             // Driver Internal error
THOR_HDLC_AR_BUSY    // HDLC Controller is BUSY, Driver internal error
THOR_INVALID_BOARD_NO // Function was supplied an invalid Board number
THOR_HDLC_INVALID_PIPE_NO // Function was supplied an invalid Pipe number
```

Equivalent LAPI Function

```
hdlcReceiveOff()
```

See Also

```
IOCTL_HDLC_RECEIVE_ON
```

12.3.6 IOCTL_HDLC_RECEIVE_ON

Synopsis

Turns on the receiver for a configured pipe. The received frames will be stored in the receive fifo.

Input Data Structure

```
typedef struct {
    short      boardNo;   // Number of the Thor-2 board hosting the
                          // HDLC Controller
    short      pipeNo;    // Number of the Pipe (channel)
} IoctlHdclT;
```

Output Data Structure

```
ThorRc           // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_HDLC_INVALID_RX_STATE // The Pipe is not in a valid receive state
THOR_HDLC_INVALID_STATE_TRANS // HDLC Invalid State Transition,
                             // Driver Internal error
THOR_HDLC_AR_BUSY    // HDLC Controller is BUSY, Driver internal error
THOR_INVALID_BOARD_NO // Function was supplied an invalid Board number
```



```
THOR_HDLC_INVALID_PIPE_NO      // Function was supplied an invalid Pipe number
```

Equivalent LAPI Function

hdhcReceiveOn()

See Also

IOCTL_HDLC_RECEIVE_OFF

12.3.7 IOCTL_HDLC_MEMORY_ALLOC

Synopsis

Allocate a blob of on-board memory to be used for sending data. Returns a handle (dataId) to the memory area which can be used to access the memory with other hdhcMemoryXXXX() functions. The function also returns the number of memory units (nrBlobs) allocated for the data. The blob size is set with the *maxFrameLen* parameter to the *IOCTL_DRV_INIT_HDLC* function.

Input Data Structure

```
typedef struct {
    short boardNo;      // Number of the Thor-2 board hosting the HDLC Controller
    Ulong size;         // Size of memory requested
} IoctlHdclMemoryAllocT;
```

Output Data Structure

```
typedef struct {
    ThorRc rc;          // Function Return Code
    short dataId;        // Data Identifier for the allocated area
    Word nrBlobs;        // Number of data blobs allocated
} IoctlHdclMemoryAllocReturnT;
```

Possible Return Codes

```
THOR_SUCCESS           // OK
THOR_OUT_OF_MEMORY    // Not enough allocatable memory to complete the
                      // request
```

Equivalent LAPI Function

hdhcMemoryAlloc()

See Also

IOCTL_HDLC_MEMORY_FREE
IOCTL_HDLC_MEMORY_WRITE



IOCTL_HDLC_MEMORY_READ

12.3.8 IOCTL_HDLC_MEMORY_FREE

Synopsis

Release on-board memory identified with the specified handle (dataId)

Input Data Structure

```
typedef struct {  
    short boardNo;    // Number of the Thor-2 board hosting the HDLC Controller  
    short dataId;    // Data Identifier whose data blobs are to be freed  
} IoctlHdlcMemoryT;
```

Output Data Structure

ThorRc

Possible Return Codes

```
THOR_SUCCES          // OK  
THOR_NO_DATA        // No allocated data found for the given Id
```

Equivalent LAPI Function

hdlcMemoryFree()

See Also

IOCTL_HDLC_MEMORY_ALLOC
IOCTL_HDLC_MEMORY_WRITE
IOCTL_HDLC_MEMORY_READ

12.3.9 IOCTL_HDLC_MEMORY_WRITE

Synopsis

Writes data into the on-board HDLC memory. Use the dataId and blobNo to identify the memory area to be written. The dataId ties memory blobs together and the HDLC controller will treat data blobs with the same dataId as continuous data. For example, if 24K of raw data is to be sent, one must write the data in to the memory in 3 passes with blob numbers 0, 1, and 2.

Input Data Structure

```
typedef struct {  
    short boardNo;    // Number of the Thor-2 board hosting the HDLC Controller
```



```

short  dataId;      // Data Identifier, must be kept track by the application
Word   blobNo;     // Data Blob number to be overwritten (0, 1, 2, ...)
Byte   data[HDLC_FRAME_LENGTH_MAX+1];    // One data blob (max size 8K)
Word   dataLen;    // Length of the data to be written
} IoctlHdLCMemoryWriteT;

```

Output Data Structure

ThorRc

Possible Return Codes

```

THOR_SUCCESS           // OK
THOR_INVALID_BOARD_NO // Provided Board Number is not valid
THOR_SIZE_TOO_LARGE   // Data size must be <= 8192 Bytes
THOR_WRONG_CONTEXT    // The HDLC controller must be initialized before
                      // this function can be called so that the HDLC
                      // memory requirements are known
THOR_OUT_OF_MEMORY    // No free memory to load the data to

```

Equivalent LAPI Function

hdLCMemoryWrite()

See Also

IOCTL_HDLC_MEMORY_ALLOC
IOCTL_HDLC_MEMORY_FREE
IOCTL_HDLC_MEMORY_READ

12.3.10 IOCTL_HDLC_MEMORY_READ

Synopsis

Reads data from the on-board HDLC memory corresponding the dataId and the blobNo. Copies the data into user allocated buffer.

Input Data Structure

```

typedef struct {
    short boardNo;    // Number of the Thor-2 board hosting the HDLC Controller
    short dataId;    // Data Identifier, must be kept track by the application
    Word  blobNo;    // Data Blob number to be read (0, 1, 2, ...)
    Word  bufLen;    // Length of the user buffer (max size 8K)
} IoctlHdLCMemoryReadT;

```



Output Data Structure

```
typedef struct {
    ThorRc rc;           // Function return code
    Byte   data[HDLC_FRAME_LENGTH_MAX+1]; // One data blob (max size 8K)
    Word   dataLen;      // Length of the user buffer (max size 8K)
} IoctlHdLCMemoryReadReturnT;
```

Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_INVALID_BOARD_NO // Provided Board Number is not valid
THOR_SIZE_TOO_LARGE   // Provided user buffer is not large enough to
                      // hold all the data
THOR_HDLC_NO_DATA     // No data found
```

Equivalent LAPI Function

hdLCMemoryRead()

See Also

IOCTL_HDLC_MEMORY_WRITE
IOCTL_HDLC_MEMORY_ALLOC
IOCTL_HDLC_MEMORY_FREE

12.3.11 IOCTL_HDLC_MEMORY_CHECK_ID

Synopsis

Checks whether a data ID is free or in use

Input Data Structure

```
typedef struct {
    short boardNo;    // Number of the Thor-2 board hosting the HDLC Controller
    short dataId;     // Data Identifier whose data blobs are to be freed
} IoctlHdLCMemoryT;
```

Output Data Structure

```
typedef struct {
    ThorRc rc;           // Function Return Code
    Bool  inUse;         // OTS_TRUE if in use, OTS_FALSE if free
    Word  size;          // Data Size
    Word  nrBlobs;       // Number of data blobs
} IoctlHdLCMemoryCheckIdReturnT;
```



Possible Return Codes

```
THOR_SUCCESS           // OK
THOR_INVALID_BOARD_NO // Provided Board Number is not valid
```

Equivalent LAPI Function

hdlcMemoryCheckId()

See Also

IOCTL_HDLC_MEMORY_CHECK_USAGE

12.3.12 IOCTL_HDLC_MEMORY_CHECK_USAGE

Synopsis

Provides a status of how much allocatable HDLC memory is available and is currently in use.

Input Data Structure

```
short boardNo      // Number of the Thor-2 board
```

Output Data Structure

```
typedef struct {
    ThorRc rc;          // Function Return Code
    Ulong totalMem;     // Total allocatable HDLC memory
    Ulong memInUse;     // HDLC memory currently in use
    Ulong memAvailable; // HDLC memory available
} IoctlHdLCMemoryCheckUsageReturnT;
```

Possible Return Codes

```
THOR_SUCCESS           // OK
THOR_INVALID_BOARD_NO // Provided Board Number is not valid
```

Equivalent LAPI Function

hdlcMemoryCheckUsage()

See Also

IOCTL_HDLC_MEMORY_CHECK_ID



12.3.13 IOCTL_HDLC_MEMORY_START_IDLE_PATTERN

Synopsis

Begin sending an idle pattern on the specified pipe. The user must first load two data blobs into the memory using `hdlcMemoryWrite`. One of the data blobs are used for the primary idle pattern and the second one for secondary idle pattern. Upon completion of this function, the HDLC controller will constantly send the primary idle pattern. The user can now send data between the idle patterns using the `hdlcMemorySend()` function. After the data has been send, the HDLC controller will start sending the secondary idle pattern.

Note: Idle pattern can contain only one descriptor and the max data size for the idle pattern is 8K.

Note: The datasize is set with the `maxFrameLen` parameter for `drvInitHdLC()` function.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board hosting the HDLC Controller
    short pipeNo;            // Number of the Pipe (channel)
    short primaryIdleDataIdx; // Data index for the primary idle pattern
    short secondaryIdleDataIdx; // Data index for the secondary idle pattern
    Bool dataEndFlag;        // Set to OTS_TRUE if the pattern (frame)
                            // should end with a frame end (0x7E for HDLC)
    short nrInterFrameTimeFills; // No of interframe time-fill characters
} IoctlHdLCMemoryStartIdlePatternT;
```

Output Data Structure

ThorRc

Possible Return Codes

```
THOR_SUCCESS                // OK
THOR_HDLC_MSG_TOO_LONG      // Message is too long to be sent
THOR_HDLC_INVALID_STATE_TRANS // HDLC Invalid State Transition, Driver
                                // Internal error
THOR_HDLC_AR_BUSY           // HDLC Controller is BUSY, Driver internal error
THOR_INVALID_BOARD_NO        // Function was supplied an invalid Board number
THOR_HDLC_INVALID_PIPE_NO    // Function was supplied an invalid Pipe number
THOR_HDLC_NO_DATA           // No data found from the specified data index
```

Equivalent LAPI Function

`hdlcMemoryStartIdlePattern()`



See Also

[IOCTL_HDLC_MEMORY_SEND_DATA](#)

12.3.14 IOCTL_HDLC_MEMORY_SEND_DATA

Synopsis

Send the data identified with the Id. When called, the HDLC controller will first complete the sending of the current Idle pattern, it will then send the data identified with the Id, after which it will immediately continue sending the idle patterns.

Input Data Structure

```
typedef struct {
    short boardNo;      // Number of the Thor-2 board hosting the HDLC Controller
    short pipeNo;       // Number of the Pipe (channel)
    short dataId;       // Data Identifier whose data blobs are to be sent
} IoctlHdlcMemorySendDataT;
```

Output Data Structure

ThorRc

Possible Return Codes

THOR_SUCCESS	// OK
THOR_WRONG_CONTEXT	// Idle sending must be started before this // function can be called
THOR_INVALID_BOARD_NO	// Provided Board Number is not valid
THOR_HDLC_INVALID_PIPE_NO	// Function was supplied an invalid Pipe number
THOR_TX_BUSY	// The sending of the previous data has not been // completed, try again later
THOR_OUT_OF_MEMORY	// Not enough transmit descriptors to send the // data. Allocate more descriptors or increase // the maximum data size.

Equivalent LAPI Function

hdhcMemorySendData()

See Also

[IOCTL_MEMORY_SEND_DATA_LIST](#)
[IOCTL_MEMORY_GET_SEND_STATUS](#)
[IOCTL_MEMORY_START_IDLE_PATTERN](#)



12.3.15 IOCTL_HDLC_MEMORY_SEND_DATA_LIST

Synopsis

Sends a list of data identified with the data Ids. The data to be send must have been loaded to memory earlier. When called, the HDLC controller will first complete the sending of the current Idle pattern, it will then send the data identified with the list of IDs, after which it will immediately continue sending the idle patterns.

Input Data Structure

```
typedef struct {  
    short boardNo;      // Number of the Thor-2 board hosting the HDLC Controller  
    short pipeNo;       // Number of the Pipe (channel)  
    short dataId[HDLC_MEMORY_SEND_LIST_MAX];    // Array of Data Identifiers  
                                              // whose data blobs are to be sent  
    short nrDataIds; // Number of Data Identifiers in the list  
} IoctlHdlcMemorySendDataListT;
```

Output Data Structure

ThorRc

Possible Return Codes

THOR_SUCCESS	// OK
THOR_WRONG_CONTEXT	// Idle sending must be started before this // function can be called
THOR_INVALID_BOARD_NO	// Provided Board Number is not valid
THOR_HDLC_INVALID_PIPE_NO	// Function was supplied an invalid Pipe number
THOR_TX_BUSY	// The sending of the previous data has not been // completed, try again later
THOR_DATA_TOO_LARGE	// Too many elements in the dataId array

Equivalent LAPI Function

hdlcMemorySendDataList()

See Also

IOCTL_HDLC_MEMORY_SEND_DATA
IOCTL_HDLC_MEMORY_GET_SEND_STATUS
IOCTL_HDLC_MEMORY_START_IDLE_PATTERN



12.3.16 IOCTL_HDLC_MEMORY_GET_SEND_STATUS

Synopsis

Send the data identified with the Id. When called, the HDLC controller will first complete the sending of the current Idle pattern, it will then send the data identified with the Id, after which it will immediately continue sending the idle patterns.

Input Data Structure

```
typedef struct {
    short boardNo;      // Number of the Thor-2 board hosting the HDLC Controller
    short pipeNo;       // Number of the Pipe (channel)
} IoctlHdlcMemoryGetSendStatusT;
```

Output Data Structure

ThorRc

Possible Return Codes

```
THOR_TX_IDLE           // HDLC controller is sending IDLE pattern
                      // on this pipe. User Data can be sent
THOR_TX_BUSY           // HDLC controller is currently busy sending
                      // user data on this pipe. Try again later
THOR_INVALID_BOARD_NO // Provided Board Number is not valid
THOR_HDLC_INVALID_PIPE_NO // Function was supplied an invalid Pipe number
```

Equivalent LAPI Function

hdhcMemoryGetSendStatus()

See Also

IOCTL_HDLC_MEMORY_SEND_DATA
IOCTL_HDLC_MEMORY_SEND_DATA_LIST

12.3.17 IOCTL_HDLC_SS7_SET_FISU

Synopsis

Sets the Signalling System #7 (SS#7) Fill-In Signalling Unit (FISU) to be sent on the specified pipe. When this function is called for the first time after *hdhcInitPipe()*, begins sending the specified FISU. If a FISU sending is already on, switches into sending the newly specified FISU.



Input Data Structure

```
typedef struct {  
    short boardNo;      // Number of the Thor-2 board hosting the HDLC Controller  
    short pipeNo;       // Number of the Pipe used for SS#7  
    HdlcSS7FisuT fisu; // FISU to be sent on the pipe  
} IoctlHdlcSS7SetFisuT;
```

Output Data Structure

ThorRc

Possible Return Codes

```
THOR_SUCCESS           // OK  
THOR_INVALID_BOARD_NO // Provided Board Number is not valid  
THOR_HDLC_INVALID_PIPE_NO // Function was supplied an invalid Pipe number  
THOR_WRONG_CONTEXT    // The HDLC controller must be initialized  
                      // before this function can be called
```

Equivalent LAPI Function

hdlcSS7SetFisu()

See Also

IOCTL_HDLC_SS7_GET_SEND_STATUS
IOCTL_HDLC_SS7_GET_RECEIVE_STATUS

12.3.18 IOCTL_HDLC_SS7_GET_SEND_STATUS

Synopsis

Return the Signalling System #7 (SS#7) Fill-In Signalling Unit (FISU) being sent on the specified pipe

Input Data Structure

```
typedef struct {  
    short boardNo;      // Number of the Thor-2 board hosting the HDLC Controller  
    short pipeNo;       // Number of the Pipe (channel)  
} IoctlHdlcT;
```

Output Data Structure

```
typedef struct {  
    ThorRc      rc;        // Function Return Code  
    HdlcSS7FisuT fisu;   // FISU Currently being sent  
} IoctlHdlcSS7GetSendStatusReturnT;
```



Possible Return Codes

```

THOR_SUCCESS          // OK
THOR_INVALID_BOARD_NO // Provided Board Number is not valid
THOR_HDLC_INVALID_PIPE_NO // Function was supplied an invalid Pipe number
THOR_WRONG_CONTEXT    // The HDLC controller must be initialized and
                      // a Fisu must have been set with hdlcSetFisu()
                      // before this function can be called

```

Equivalent LAPI Function

hdlcSS7GetSendStatus()

See Also

IOCTL_HDLC_SS7_GET_RECEIVE_STATUS
IOCTL_HDLC_SS7_SET_FISU

12.3.19 IOCTL_HDLC_SS7_GET_RECEIVE_STATUS

Synopsis

Retrieve status and statistics of the incoming SS7 link on the specified pipe.

Input Data Structure

```

typedef struct {
    short boardNo;      // Number of the Thor-2 board hosting the HDLC Controller
    short pipeNo;       // Number of the Pipe (channel)
} IoctlHdlcT;

```

Output Data Structure

```

typedef struct {
    ThorRc      rc;           // Function Return Code
    Ulong       fisuCount;    // Number of FISUs received
    Ulong       lssuCount;    // Number of LSSUs received
    Ulong       msuCount;    // Number of MSUs received
    HdlcSS7FisuT fisu;       // The last received FISU on the PIPE
} IoctlHdlcSS7GetReceiveStatusReturnT;

```

Possible Return Codes

```

THOR_SUCCESS          // OK
THOR_INVALID_BOARD_NO // Provided Board Number is not valid
THOR_HDLC_INVALID_PIPE_NO // Function was supplied an invalid Pipe number
THOR_WRONG_CONTEXT    // The HDLC controller must be initialized and
                      // a Fisu must have been set with hdlcSetFisu()

```



```
// before this function can be called
```

Equivalent LAPI Function

hdlcSS7GetReceiveStatus()

See Also

IOCTL_HDLC_SS7_GET_SEND_STATUS
IOCTL_HDLC_SS7_SET_FISU

12.3.20 IOCTL_HDLC_SS7_SET_FILTER

Synopsis

Set the filter mask for the filtering out SS#7 FISUs, LSSUs, and/or MSUs.

Input Data Structure

```
typedef struct {
    short boardNo;      // Number of the Thor-2 board hosting the HDLC Controller
    short pipeNo;       // Number of the Pipe used for SS#7
    unsigned long filterMask; // Filter Mask
} IoctlHdlcSS7SetFilterT;
```

Output Data Structure

ThorRc

Possible Return Codes

```
THOR_SUCCESS           // OK
THOR_INVALID_BOARD_NO // Provided Board Number is not valid
THOR_HDLC_INVALID_PIPE_NO // Function was supplied an invalid Pipe number
```

Equivalent LAPI Function

hdlcSS7SetFilter()

See Also

IOCTL_HDLC_SS7_GET_FILTER

12.3.21 IOCTL_HDLC_SS7_GET_FILTER

Synopsis

Retrieve the currently active filter mask for filtering out SS#7 FISUs, LSSUs, and/or MSUs



Input Data Structure

```
typedef struct {
    short boardNo;      // Number of the Thor-2 board hosting the HDLC Controller
    short pipeNo;       // Number of the Pipe (channel)
} IoctlHdlcT;
```

Output Data Structure

```
typedef struct {
    ThorRc          rc;           // Function Return Code
    unsigned long   filterMask;  // Filter Mask
} IoctlHdlcSS7GetFilterReturnT;
```

Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_INVALID_BOARD_NO // Provided Board Number is not valid
THOR_HDLC_INVALID_PIPE_NO // Function was supplied an invalid Pipe number
```

Equivalent LAPI Function

hdhcSS7GetFilter()

See Also

IOCTL_HDLC_SS7_SET_FILTER

12.3.22 IOCTL_HDLC_SS7_SEND_DATA

Synopsis

Send a message (LSSU, MSU, or arbitrary data) on a SS#7 pipe. After the sending of the message has been completed, continues sending the new FISU provided as a parameter to the function.

Input Data Structure

```
typedef struct {
    short boardNo;          // Number of the Thor-2 board hosting the HDLC Controller
    short pipeNo;           // Number of the Pipe (channel)
    Byte   data[HDLC_FRAME_LENGTH_MAX+1]; // Data to be sent
    Word   dataLen;         // Length of the data
    HdlcSS7FisuT nextFisu; // Next fisu to be sent
} IoctlHdlcSS7SendDataT;
```



Output Data Structure

ThorRc

Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_TX_BUSY          // Sending of the previous message has not been
                      // completed, try again later
THOR_INVALID_BOARD_NO // Provided Board Number is not valid
THOR_HDLC_INVALID_PIPE_NO // Function was supplied an invalid Pipe number
```

Equivalent LAPI Function

hdlcSS7SendData()

See Also

IOCTL_HDLC_SS7_SET_FISU

12.3.23 IOCTL_HDLC_SS7_SEND_DATA_EX

Synopsis

Send an SS7 FISU, LSU, or MSU. If LSSU then repeat the LSSU. If FISU then repeat the FISU. If MSU then send the MSU, then repeat FISUs with the same BSN and FSN as the MSU.

The data in the first call to this function must be either a FISU or LSSU.

Input Data Structure

```
typedef struct {
    short boardNo;      // Number of the Thor-2 board hosting
                        // the HDLC Controller
    short pipeNo;       // Number of the Pipe (channel)
    Word  dataLen;     // Length of the data
    Byte  data[HDLC_FRAME_LENGTH_MAX+1]; // Data to be sent
} IoctlHdlcSS7SendDataExT;
```

Output Data Structure

ThorRc

Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_TX_BUSY          // Sending of the previous message has
                      // not been completed, try again later
```



```
THOR_INVALID_BOARD_NO // Provided Board Number is not valid
THOR_HDLC_INVALID_PIPE_NO // Function was supplied an invalid Pipe number
THOR_DATA_TOO_LARGE // Data length too large
THOR_WRONG_CONTEXT // Pipe not configured or first data is
// not FISU or LSSU
```

Equivalent LAPI Function

hdlcSS7SendDataEx()

See Also

IOCTL_HDLC_SS7_SEND_DATA



12.4 Time-Space Switch (TSS) Operations

12.4.1 IOCTL_TSS_CLEAR

Synopsis

Clears all the Cross-connects in the time-space switch and begins generating 0's on the output time-slots.

Input Data Structure

```
short           // boardNo - Number of the Thor-2 board
```

Output Data Structure

```
ThorRc          // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS      // OK
THOR_TSS_INVALID_PCM_HW // The function is supplied an invalid PCH
                        // highway number
THOR_TSS_INVALID_CHANNEL // The function is supplied an invalid channel number
THOR_INVALID_BOARD_NO    // The function is supplied an invalid board number
```

Equivalent LAPI Function

```
tssClear()
```

See Also

```
IOCTL_TSS_XCONNECT
IOCTL_TSS_CONST_BYTE
```

12.4.2 IOCTL_TSS_CONST_BYTE

Synopsis

Generates a constant byte value on an output time-slot. I.e., every time-slot sample (8000 per second) will have the same value. To turn off the constant byte generation, specify byte value 0, or use *IOCTL_TSS_CLEAR*.

Input Data Structure

```
typedef struct {
    short      boardNo;        // The number of the Thor-2 board hosting the TSS
    ThorPhwType pcmHwOut;     // Highway to output the constant byte
    short      channelOut;     // Time-slot to output the constant byte
```



```
    Byte      constVal;      // Constant value to output
} IoctlTssConstByteT;
```

Output Data Structure

ThorRc // Function Return Code

Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_TSS_INVALID_PCM_HW // The function is supplied an invalid PCH
                        // highway number
THOR_TSS_INVALID_CHANNEL // The function is supplied an invalid channel number
THOR_INVALID_BOARD_NO   // The function is supplied an invalid board number
```

Equivalent LAPI Function

tssConstByte()

See Also

IOCTL_TSS_CLEAR

12.4.3 IOCTL_TSS_DISABLE

Synopsis

Disables the FMIC after it has been initialized and enabled. The TSS must be disabled when the HDLC controller is being initialized.

Input Data Structure

short // boardNo - Number of the Thor-2 board

Output Data Structure

ThorRc // Function Return Code

Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_INVALID_BOARD_NO // The function is supplied an invalid board number
```

Equivalent LAPI Function

tssDisable()

See Also

IOCTL_TSS_INIT



IOCTL_TSS_ENABLE

12.4.4 IOCTL_TSS_ENABLE

Synopsis

Enables the Time-Space Switch after it has been initialized and configured.

Input Data Structure

```
short           // boardNo - Number of the Thor-2 board
```

Output Data Structure

```
ThorRc          // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS      // OK  
THOR_INVALID_BOARD_NO // The function is supplied an invalid board number
```

Equivalent LAPI Function

```
tssEnable()
```

See Also

```
IOCTL_TSS_INIT  
IOCTL_TSS_DISABLE
```

12.4.5 IOCTL_TSS_INIT

Synopsis

Initializes and configures the Time-Space Switch. This function must be called before the time-space switch can be used.

Input Data Structure

```
short           // boardNo - Number of the Thor-2 board
```

Output Data Structure

```
ThorRc          // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS      // OK  
THOR_INVALID_BOARD_NO // The function is supplied an invalid board number
```

*Equivalent LAPI Function*

```
tssInit()
```

See Also

```
IOCTL_TSS_ENABLE
IOCTL_TSS_DISABLE
```

12.4.6 IOCTL_TSS_LI_CONST_BYTE*Synopsis*

Generates a constant byte value on an output time-slot. I.e., every time-slot sample (8000 per second) will have the same value. To turn off the constant byte generation, specify byte value 0, or use *IOCTL_TSS_CLEAR*.

Note: Same operation as the the **IOCTL_TSS_CONST_BYTE** function except that the channel number on Li Highways is incremented by one (THOR_PHW_LI0 and THOR_PHW_LI1 highways) if the Li is in T1 mode, i.e. one can always use zero-counting with time-slots.

Input Data Structure

```
typedef struct {
    short      boardNo;          // The number of the Thor-2 board hosting the TSS
    ThorPhwType pcmHwOut;       // Highway to output the constant byte
    short      channelOut;       // Time-slot to output the constant byte
    Byte       constVal;         // Constant value to output
} IoctlTssConstByteT;
```

Output Data Structure

```
ThorRc                      // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS                // OK
THOR_TSS_INVALID_PCM_HW   // The function is supplied an invalid PCH
                           // highway number
THOR_TSS_INVALID_CHANNEL  // The function is supplied an invalid channel number
THOR_INVALID_BOARD_NO      // The function is supplied an invalid board number
```

Equivalent LAPI Function

```
tssLiConstByte()
```



See Also

IOCTL_TSS_CONST_BYTE
IOCTL_TSS_CLEAR

12.4.7 IOCTL_TSS_LI_XCONNECT

Synopsis

Cross-connects a time-slot from one highway to another through the time-space switch.

Note: Same operation as the the IOCTL_TSS_XCONNECT function except that the channel number on Li Highways is incremented by one (THOR_PHW_LI0 and THOR_PHW_LI1 highways) if the Li is in T1 mode, i.e. one can always use zero-counting with time-slots.

Input Data Structure

```
typedef struct {
    short          boardNo;           // The number of the Thor-2 board hosting the TSS
    ThorPhwType   pcmHwIn;          // The Incoming Highway
    short          channelIn;         // The time-slot on the incoming highway
    ThorPhwType   pcmHwOut;         // The outgoing highway
    short          channelOut;        // The time-slot on the outgoing highway
} IoctlTssXConnectT;
```

Output Data Structure

```
ThorRc                      // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS                // OK
THOR_TSS_INVALID_PCM_HW    // The function is supplied an invalid PCH
                           // highway number
THOR_TSS_INVALID_CHANNEL   // The function is supplied an invalid channel number
THOR_INVALID_BOARD_NO       // The function is supplied an invalid board number
```

Equivalent LAPI Function

```
tssLiXConnect()
```

See Also

IOCTL_TSS_XCONNECT



12.4.8 IOCTL_TSS_READ_DATA_MEMORY

Synopsis

Reads a snapshot (one Byte) of a particular channel in the Time-Space Switch Data Memory. The Time-Space Switch buffers the data from the time-slots to be switched in the data memory.

Note: The data-memory access is slow this function will return one byte at a arbitrary time from the incoming stream.

Input Data Structure

```
typedef struct {
    short      boardNo;        // The number of the Thor-2 board hosting the TSS
    ThorPhwType pcmHwIn;      // Incoming highway
    short      channelIn;     // Time-slot on the highway
} IoctlTssReadDataMemoryT;
```

Output Data Structure

```
typedef struct {
    ThorRc      rc;           // Function return code
    Byte        dataVal;       // Value (snapshot) of the time-slot data memory
} IoctlTssReadDataMemoryReturnT;
```

Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_TSS_INVALID_PCM_HW // The function is supplied an invalid PCH
                        // highway number
THOR_TSS_INVALID_CHANNEL // The function is supplied an invalid channel number
THOR_INVALID_BOARD_NO   // The function is supplied an invalid board number
```

Equivalent LAPI Function

tssReadDataMemory()

12.4.9 IOCTL_TSS_TIMING_MODE

Synopsis

Sets the MVIP timing mode for the Time-Space Switch. For more information on the timing modes, please refer to the documentation the MVIP-90 Standard. The timing mode can be changed dynamically.



Input Data Structure

```
typedef struct {  
    short boardNo;           // The number of the Thor-2 board hosting the TSS  
    short mode;              // Timing Mode  
} IoctlTssTimingModeT;
```

Output Data Structure

```
ThorRc                      // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS                // OK  
THOR_TSS_INVALID_TIMING_MODE // The function was supplied an invalid  
                             // timing mode  
THOR_INVALID_BOARD_NO       // The function was supplied an invalid  
                             // board number
```

Equivalent LAPI Function

```
tssTimingMode( )
```

12.4.10 IOCTL_TSS_XCONNECT

Synopsis

Cross-connects a time-slot from one highway to another through the time-space switch.

Note: This function only makes a one-way connection. To make a two way connection, this function must be called twice with the parameters swapped.

Input Data Structure

```
typedef struct {  
    short          boardNo;        // The number of the Thor-2 board hosting the TSS  
    ThorPhwType   pcmHwIn;       // The Incoming Highway  
    short          channelIn;     // The time-slot on the incoming highway  
    ThorPhwType   pcmHwOut;      // The outgoing highway  
    short          channelOut;    // The time-slot on the outgoing highway  
} IoctlTssXConnectT;
```

Output Data Structure

```
ThorRc                      // Function Return Code
```



Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_TSS_INVALID_PCM_HW // The function is supplied an invalid PCH
                        // highway number
THOR_TSS_INVALID_CHANNEL // The function is supplied an invalid channel number
THOR_INVALID_BOARD_NO   // The function is supplied an invalid board number
```

Equivalent LAPI Function

tssXConnect()

See Also

IOCTL_TSS_CLEAR



12.5 On-board Processor (LPU) Operations

12.5.1 IOCTL_LPU_BOOT

Synopsis

Boots up the on-board Processor. The on-board processor is reset and the LPU will begin executing the bootstrap from the flash memory. The LPU can be booted up unconditionally (always) or conditionally only if the LPU is not already running.

Input Data Structure

```
typedef struct {  
    short          boardNo;      // Number of the Thor-2 board hosting the LPU  
    LpuBootCondT  condition;   // Boot Condition  
} IoctlLpuBootT;
```

Output Data Structure

```
ThorRc           // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS          // OK  
THOR_BAD_BOOT_VECTOR // Corrupted LPU Boot Vector, Problems in Flash Memory  
THOR_LPU_BOOT_FAILED // LPU Boot Failed, the LPU is not running  
THOR_NO_MEM_WIN      // Memory Window has not been configured, cannot  
                      // access memory  
THOR_INVALID_BOARD_NO // The function was supplied an invalid board number
```

Equivalent LAPI Function

```
lpuBoot()
```

12.5.2 IOCTL_LPU_FLOAT

Synopsis

Disconnects the LPU from the Local Memory Bus by forcing its pins into a high-impedance state. Note: if the LPU is floated, the DRAM memory will not be refreshed and the data in the DRAM will be lost. However, when the LPU is floated, the host can still access the flash memory. This function is used during updating of the flash boot sector.

Input Data Structure

```
short          // boardNo - Number of the Thor-2 board
```



Output Data Structure

```
ThorRc           // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS      // OK
THOR_INVALID_BOARD_NO // The function was supplied an invalid board number
```

Equivalent LAPI Function

```
lpuFloat()
```

12.5.3 IOCTL_LPU_GET_STATUS

Synopsis

Get the Status of the LPU, I.e. Check if it is running or floating (i.e. disconnected from the local on-board buses).

Input Data Structure

```
typedef struct {
    ThorRc rc;           // Function return code
    LpuStatusT lpuStatus; // Current Status of the LPU (Output)
} IoctlLpuGetStatusReturnT;
```

Output Data Structure

```
ThorRc           // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS      // OK
THOR_INVALID_BOARD_NO // The function was supplied an invalid board number
```

Equivalent LAPI Function

```
lpuGetStatus()
```

12.5.4 IOCTL_LPU_INSTALL_ISR

Synopsis

Loads an interrupt service routine for the LPU into the on-board memory (RAM).

Input Data Structure

A buffer containing the following data:



```
short  boardNo      // Number of the Thor-2 board
int    lpuIsrVect   // Number of the LPU interrupt vector
Ulong  lpuIsrAddr   // Starting address of the LPU isr Vector
Word   isrLen       // Length of the Interrupt service routine
Byte   isr[isrLen]  // Interrupt Service routine, isrLen * Bytes
```

Output Data Structure

```
ThorRc           // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS      // OK
THOR_INVALID_BOARD_NO // The function was supplied an invalid board number
```

Equivalent LAPI Function

```
lpuInstallIsr()
```

12.5.5 IOCTL_LPU_INTR

Synopsis

Generates an interrupt towards the LPU.

Input Data Structure

```
short          // boardNo - Number of the Thor-2 board
```

Output Data Structure

```
ThorRc           // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS      // OK
THOR_INVALID_BOARD_NO // The function was supplied an invalid board number
```

Equivalent LAPI Function

```
lpuIntr()
```



12.6 Flash Memory (FLASH) Operations

12.6.1 IOCTL_FLSH_CHECK_SECTOR_USAGE

Synopsis

Counts the number of words in use in a specific sector of the Flash. I.e. count all the word that are not equal to 0xFFFF.

Note: Locations containing data 0xFFFF are treated as non-used locations, which may result in an inaccurate count.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the board hosting the flash memory
    short sectNo;            // Number of the sector to be erased
} IoctlFlshSectorT;
```

Output Data Structure

```
typedef struct {
    ThorRc rc;                // Function Return code
    Ulong usage;               // Flash Usage count
} IoctlFlshUsageReturnT;
```

Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_NO_MEM_WIN      // No Memory Window Configured, Cannot access memory
THOR_INVALID_BOARD_NO // The function was supplied an invalid board number
```

Equivalent LAPI Function

flshCheckSectorUsage()

See Also

IOCTL_FLASH_CHECK_USAGE

12.6.2 IOCTL_FLSH_CHECK_USAGE

Synopsis

Counts the number of words in use in the entire Flash. I.e. count all the word that are not equal to 0xFFFF.



Note: Locations containing data 0xFFFF are treated as non-used locations, which may result in an inaccurate count.

Input Data Structure

```
short           // boardNo - Number of the board hosting the flash memory
```

Output Data Structure

```
typedef struct {
    ThorRc rc;          // Function Return code
    Ulong usage;        // Flash Usage count
} IoctlFlshUsageReturnT;
```

Possible Return Codes

```
THOR_SUCCESS      // OK
THOR_NO_MEM_WIN   // No Memory Window Configured, Cannot access memory
THOR_INVALID_BOARD_NO // The function was supplied an invalid board number
```

Equivalent LAPI Function

```
flshCheckUsage()
```

See Also

IOCTL_FLASH_CHECK_SECTOR_USAGE

12.6.3 IOCTL_FLASH_ERASE_SECTOR

Synopsis

Erases (empties) one of the flash's 7 user sectors. Note: the user can erase and rewrite sectors number: 1-6 and 9. For more information on the Thor-2 flash sectors, please see the Thor-2 Technical Description.

Input Data Structure

```
typedef struct {
    short boardNo;      // Number of the board hosting the flash memory
    short sectNo;       // Number of the sector to be erased
} IoctlFlshSectorT;
```

Output Data Structure

```
ThorRc           // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS      // Sector was erased
```



```
THOR_FLASH_PRG_FAIL    // Erasure Failed
THOR_INVALID_BOARD_NO  // The function was supplied an invalid board number
```

Equivalent LAPI Function

flshEraseSector()

12.6.4 IOCTL_FLSH_LOAD_DATA

Synopsis

Loads an array of data bytes anywhere into the flash memory.

Input Data Structure

A buffer containing the following data:

```
short  boardNo          // Number of the Thor-2 board
Ulong  targetBaseAddr   // Starting address for the data in the flash
Ulong  dataLen          // Length of the data to be loaded
Byte   data[dataLen]    // Data to be loaded, dataLen * Bytes
```

Output Data Structure

```
ThorRc                  // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS            // OK
THOR_FLASH_BAD_ADDR    // The Address supplied was not even or not
                        // within the flash memory area
THOR_FLASH_PRG_FAIL    // The Flash write operation failed, the flash may
                        // be corrupted
THOR_INVALID_BOARD_NO  // The supplied board number is not valid
```

Equivalent LAPI Function

flshLoadData()

12.6.5 IOCTL_FLSH_READ_MAINT_SECT

Synopsis

Reads the Thor-2 Maintenance sector from the flash (sector number 10) into a struct. This sector contains information about Boot Vectors and Device Revisions on the board.



Input Data Structure

```
short      // boardNo - Number of the Thor-2 board
```

Output Data Structure

```
typedef struct {
    ThorRc rc;           // Number of the board hosting the flash memory
    MaintDataT md;        // Maintenance Data (Boot vectors and revisions)
} IoctlFlshReadMaintSectReturnT;
```

Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_NO_MEM_WIN       // No Memory Window Configured, Cannot access memory
THOR_INVALID_BOARD_NO // The supplied board number is not valid
```

Equivalent LAPI Function

```
flshReadMaintData()
```

See Also

IOCTL_DRV_READ_CONFIG_DATA

12.6.6 IOCTL_FLSH_WRITE_MEM

Synopsis

Writes a data word (16 bits) into the Flash memory.

Note: The address to be written to must be an even address.

Note: This function cannot be used to overwrite old data. The sector must first be erased (i.e. make all locations contain 0xFFFF) and then this function can be used to write into an empty sector.

Input Data Structure

```
typedef struct {
    short boardNo;        // Number of the board hosting the flash memory
    Ulong addr;          // Local (on-board) Memory address (flat model)
    Word  data;          // Data to write
} IoctlFlshWriteMemT;
```

Output Data Structure

```
ThorRc                // Function Return Code
```



Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_FLASH_BAD_ADDR // The Address supplied was not even or not
                     // within the flash memory area
THOR_FLASH_PRG_FAIL // The Flash write operation failed, the flash may
                     // be corrupted
THOR_INVALID_BOARD_NO // The supplied board number is not valid
```

See Also

[IOCTL_FLSH_ERASE_SECTOR](#)



12.7 Codec (CD) Operations

12.7.1 IOCTL_CD_CONNECT_DTMF

Synopsis

Connects the DTMF chip to the codec transmit path, so that the DTMF chip can be used to generate and receive DTMF tones.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board hosting the Codec
    short codecNo;          // Number of the Codec chip
} IoctlCdT;
```

Output Data Structure

```
ThorRc           // Function Return Code
```

Equivalent LAPI Function

```
cdConnectDtmf()
```

Possible Return Codes

```
THOR_SUCCESS      // OK
THOR_CD_COMM_FAILURE // Communication to the Codec Failed
THOR_INVALID_CODEC_NO // The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO // The Supplied Board number is not valid
```

12.7.2 IOCTL_CD_CONNECT_HANDSET_MIC

Synopsis

Connects handset microphone to one of the codecs.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board hosting the Codec
    short codecNo;          // Number of the Codec chip
} IoctlCdT;
```

Output Data Structure

```
ThorRc           // Function Return Code
```



Possible Return Codes

```
THOR_SUCCESS           // OK
THOR_CD_COMM_FAILURE // Communication to the Codec Failed
THOR_INVALID_CODEC_NO // The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO // The Supplied Codec number is not valid
```

Equivalent LAPI Function

cdConnectHandsetMic()

See Also

```
IOCTL_CD_DISCONNECT_HANDSET_MIC
IOCTL_CD_CONNECT_HANDSFREE_SPEAKER
IOCTL_CD_CONNECT_HANDSET_SPEAKER
```

12.7.3 IOCTL_CD_CONNECT_HANDSET_SPEAKER

Synopsis

Connects a handset speaker (ear piece) to a codec.

Input Data Structure

```
typedef struct {
    short boardNo;          // Number of the Thor-2 board hosting the Codec
    short codecNo;          // Number of the Codec chip
} IoctlCdT;
```

Output Data Structure

```
ThorRc                  // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS           // OK
THOR_CD_COMM_FAILURE // Communication to the Codec Failed
THOR_INVALID_CODEC_NO // The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO // The Supplied Codec number is not valid
```

Equivalent LAPI Function

cdConnectHandsetSpeaker()

See Also

```
IOCTL_CD_DISCONNECT_HANDSET_SPEAKER
IOCTL_CD_CONNECT_HANDSET_MIC
IOCTL_CD_CONNECT_HANDSFREE_SPEAKER
```



12.7.4 IOCTL_CD_CONNECT_HANDSFREE_SPEAKER

Synopsis

Connects a hands free speaker to a codec.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board hosting the Codec
    short codecNo;          // Number of the Codec chip
} IoctlCdT;
```

Output Data Structure

```
ThorRc           // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS      // OK
THOR_CD_COMM_FAILURE // Communication to the Codec Failed
THOR_INVALID_CODEC_NO // The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO // The Supplied Board number is not valid
```

Equivalent LAPI Function

```
cdConnectHandsfreeSpeaker()
```

See Also

```
IOCTL_CD_DISCONNECT_HANDSFREE_SPEAKER
IOCTL_CD_CONNECT_HANDSET_MIC
IOCTL_CD_CONNECT_HANDSET_SPEAKER
```

12.7.5 IOCTL_CD_DIGITAL_GAIN

Synopsis

Sets the Digital gain in a codec (for transmit and received directions). The digital gain can be set in 3dB increments. The total gain for the Codec is the sum of the Digital and Filter gain.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board hosting the Codec
    short codecNo;          // Number of the Codec
    CdDigitalGainT txGain;  // Transmit Gain
```



```
CdDigitalGainT rxGain; // Receive Gain
} IoctlCdDigitalGainT;
```

Output Data Structure

ThorRc // Function Return Code

Possible Return Codes

THOR_SUCCESS	// OK
THOR_CD_COMM_FAILURE	// Communication to the Codec Failed
THOR_INVALID_CODEC_NO	// The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO	// The Supplied Codec number is not valid

Equivalent LAPI Function

cdDigitalGain()

See Also

IOCTL_CD_FILTER_GAIN

12.7.6 IOCTL_CD_DISCONNECT_HANDSET_MIC

Synopsis

Disconnects a handset speaker from a codec (if it has been previously connected with IOCTL_CD_CONNECT_HANDSET_MIC)

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board hosting the Codec
    short codecNo;          // Number of the Codec chip
} IoctlCdT;
```

Output Data Structure

ThorRc // Function Return Code

Possible Return Codes

THOR_SUCCESS	// OK
THOR_CD_COMM_FAILURE	// Communication to the Codec Failed
THOR_INVALID_CODEC_NO	// The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO	// The Supplied Codec number is not valid



Equivalent LAPI Function

cdDisconnectHandsetMic()

See Also

IOCTL_CD_CONNECT_HANDSET_MIC
IOCTL_CD_DISCONNECT_HANDSET_SPEAKER
IOCTL_CD_DISCONNECT_HANDSFREE_SPAKER

12.7.7 IOCTL_CD_DISCONNECT_HANDSET_SPEAKER

Synopsis

Disconnects a handset speaker (ear piece) from a codec (if it has been previously connected with *IOCTL_CD_CONNECT_HANDSET_SPEAKER*).

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board hosting the Codec
    short codecNo;          // Number of the Codec chip
} IoctlCdT;
```

Output Data Structure

ThorRc // Function Return Code

Possible Return Codes

```
THOR_SUCCESS           // OK
THOR_CD_COMM_FAILURE // Communication to the Codec Failed
THOR_INVALID_CODEC_NO // The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO // The Supplied Codec number is not valid
```

Equivalent LAPI Function

cdDisconnectHandsetSpeaker()

See Also

IOCTL_CONNECT_HANDSET_SPEAKER
IOCTL_DISCONNECT_HANDSET_MIC
IOCTL_DISCONNECT_HANDSFREE_SPEAKER



12.7.8 IOCTL_CD_DISCONNECT_HANDSFREE_SPEAKER

Synopsis

Disconnects a handset speaker from a codec (if it has been previously connected with *IOCTL_CE_CONNECT_HANDSFREE_SPEAKER*)

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board hosting the Codec
    short codecNo;          // Number of the Codec chip
} IOCTLCdT;
```

Output Data Structure

```
ThorRc           // Function Return Code
```

Possible Return Codes

THOR_SUCCESS	// OK
THOR_CD_COMM_FAILURE	// Communication to the Codec Failed
THOR_INVALID_CODEC_NO	// The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO	// The Supplied Board number is not valid

Equivalent LAPI Function

```
cdDisconnectHandsfreeSpeaker()
```

See Also

```
IOCTL_CD_CONNECT_HANDSFREE_SPEAKER
IOCTL_CD_DISCONNECT_HANDSET_MIC
IOCTL_CD_DISCONNECT_HANDSET_SPEAKER
```

12.7.9 IOCTL_CD_FILTER_GAIN

Synopsis

Sets the Codec Filter gain in both receive and transmit directions. The total gain for the Codec is the sum of the Digital and Filter gain.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board hosting the Codec
    short codecNo;          // Number of the Codec
    short txGain;           // Transmit Gain in dB (0 dB through 7dB)
}
```



```
    short rxGain;           // Receive Gain in dB (-7 dB through 0dB)
} IoctlCdFilterGainT;
```

Output Data Structure

```
ThorRc           // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS      // OK
THOR_CD_INVALID_TX_GAIN // Supplied Transmit (TX) gain is invalid
THOR_CD_INVALID_RX_GAIN // Supplied Receive (RX) gain is invalid
THOR_CD_COMM_FAILURE // Communication to the Codec Failed
THOR_INVALID_CODEC_NO // The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO // The Supplied Codec number is not valid
```

12.7.10 IOCTL_CD_INIT

Synopsis

Initializes a Codec chip to use a specified coding law and code assignment.

Input Data Structure

```
typedef struct {
    short boardNo;          // Number of the Thor-2 board hosting the Codec
    short codecNo;          // Number of the Codec
    CdLawT law;             // u-law or A-law
    CdCodeT code;           // sign magnitude or CCITT code assignment
} IoctlCdInitT;
```

Output Data Structure

```
ThorRc           // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS      // OK
THOR_CD_INVALID_LAW // Supplied Codec Coding Law is invalid
THOR_CD_INVALID_CODE // Supplied Codec Coding code is invalid
THOR_CD_COMM_FAILURE // Communication to the Codec Failed
THOR_INVALID_CODEC_NO // The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO // The Supplied Codec number is not valid
```

Equivalent LAPI Function

```
cdInit()
```



12.7.11 IOCTL_CD_MUTE_OFF

Synopsis

Enables the phone (handset) after it has been muted.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board hosting the Codec
    short codecNo;          // Number of the Codec chip
} IoctlCdT;
```

Output Data Structure

ThorRc	// Function Return Code
--------	-------------------------

Possible Return Codes

THOR_SUCCESS	// OK
THOR_CD_COMM_FAILURE	// Communication to the Codec Failed
THOR_INVALID_CODEC_NO	// The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO	// The Supplied Board number is not valid

Equivalent LAPI Function

cdMuteOff()

See Also

IOCTL_CD_MUTE_ON

12.7.12 IOCTL_CD_MUTE_ON

Synopsis

Mutes the phone (handset).

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board hosting the Codec
    short codecNo;          // Number of the Codec chip
} IoctlCdT;
```

Output Data Structure

ThorRc	// Function Return Code
--------	-------------------------



Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_CD_COMM_FAILURE // Communication to the Codec Failed
THOR_INVALID_CODEC_NO // The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO // The Supplied Codec number is not valid
```

Equivalent LAPI Function

cdMuteOn()

See Also

IOCTL_CD_MUTE_OFF

12.7.13 IOCTL_CD_RESET

Synopsis

Performs a reset on a Codec chip.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board hosting the Codec
    short codecNo;           // Number of the Codec chip
} IoctlCdT;
```

Output Data Structure

```
ThorRc                // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_CD_COMM_FAILURE // Communication to the Codec Failed
THOR_INVALID_CODEC_NO // The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO // The Supplied Codec number is not valid
```

Equivalent LAPI Function

cdReset()



12.7.14 IOCTL_CD_SEND_DTMF

Synopsis

Sends a DTMF tone from the codec. Note that both the Codecs and the DTMF transceivers can be used to send DTMF tones. However, only the DTMF transceivers are capable of receiving and detecting DTMF tones.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board hosting the Codec
    short codecNo;          // Number of the Codec
    char cDigit;             // The DTMF digit to be sent
} IOCTLCdSendDtmfT;
```

Output Data Structure

ThorRc	// Function Return Code
--------	-------------------------

Possible Return Codes

THOR_SUCCESS	// OK
THOR_CD_COMM_FAILURE	// Communication to the Codec Failed
THOR_INVALID_CODEC_NO	// The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO	// The Supplied Board number is not valid

Equivalent LAPI Function

cdSendDtmf()

See Also

IOCTL_DTMF_SEND
IOCTL_DTMF_SEND_BURST

12.7.15 IOCTL_CD_SEND_MF

Synopsis

Sends a MF tone from a Codec.

The generated tone Frequencies are as follows:

Low f, High f

-
- 1: 700Hz, 900Hz
 - 2: 700Hz, 1100Hz



3: 900Hz, 1100Hz
4: 700Hz, 1300Hz
5: 900Hz, 1300Hz
6: 1100Hz, 1300Hz
7: 700Hz, 1500Hz
8: 900Hz, 1500Hz
9: 1100Hz, 1500Hz
0: 1300Hz, 1500Hz
KP: 1100Hz, 1700Hz
ST: 1500Hz, 1700Hz

Input Data Structure

```
typedef struct {  
    short boardNo;           // Number of the Thor-2 board hosting the Codec  
    short codecNo;          // Number of the Codec  
    char cDigit;            // The MF digit to be sent  
} IOCTL_CDSENDDTMF;
```

Output Data Structure

```
ThorRc                      // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS                // OK  
THOR_CD_COMM_FAILURE       // Communication to the Codec Failed  
THOR_INVALID_CODEC_NO      // The Supplied Codec number is not valid  
THOR_INVALID_BOARD_NO      // The Supplied Codec number is not valid  
THOR_INVALID_DIGIT         // The supplied digit is invalid, use  
                           // '0' - '9', 'k' for KP, 's' for ST
```

Equivalent LAPI Function

```
cdSendMf()
```

See Also

```
IOCTL_DTMF_SEND
```

12.7.16 IOCTL_CD_TONE_OFF

Synopsis

Stop sending DTMF or MF tones.

Input Data Structure

```
typedef struct {
```



```
short boardNo;           // Number of the Thor-2 board hosting the Codec
short codecNo;          // Number of the Codec chip
} IoctlCdT;
```

Output Data Structure

ThorRc // Function Return Code

Possible Return Codes

THOR_SUCCESS	// OK
THOR_CD_COMM_FAILURE	// Communication to the Codec Failed
THOR_INVALID_CODEC_NO	// The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO	// The Supplied Codec number is not valid

Equivalent LAPI Function

cdToneOff()

See Also

-

12.7.17 IOCTL_CD_VOICE_SIDE_TONE_OFF

Synopsis

Turns the side tone in the speaker off.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board hosting the Codec
    short codecNo;          // Number of the Codec chip
} IoctlCdT;
```

Output Data Structure

ThorRc // Function Return Code

Possible Return Codes

THOR_SUCCESS	// OK
THOR_CD_COMM_FAILURE	// Communication to the Codec Failed
THOR_INVALID_CODEC_NO	// The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO	// The Supplied Codec number is not valid

Equivalent LAPI Function

cdVoiceSideToneOff



See Also

IOCTL_CD_VOICE_SIDE_TONE_ON

12.7.18 IOCTL_CD_VOICE_SIDE_TONE_ON

Synopsis

Turns the side tone in the speaker on.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the Thor-2 board hosting the Codec
    short codecNo;          // Number of the Codec chip
} IoctlCdT;
```

Output Data Structure

```
ThorRc           // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS      // OK
THOR_CD_COMM_FAILURE // Communication to the Codec Failed
THOR_INVALID_CODEC_NO // The Supplied Codec number is not valid
THOR_INVALID_BOARD_NO // The Supplied Board number is not valid
```

Equivalent LAPI Function

cdVoiceSideToneOn()

See Also

IOCTL_CD_VOICE_SIDE_TONE_OFF



12.8 Dual Tone Multi Frequency Transceiver (DTMF) Operations

12.8.1 IOCTL_DTMF_BURST_STATUS

Synopsis

Checks whether the DTMF transceiver is busy sending tones or idle and ready to send.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the board hosting the DTMF chips
    short dtmfNo;            // DTMF chip number
} IoctlDtmfT;
```

Output Data Structure

```
ThorRc           // Function Return Code
```

Possible Return Codes

THOR_SUCCESS	// not busy sending DTMF tones
THOR_DTMF_BUSY	// busy sending DTMF tones
THOR_INVALID_BOARD_NO	// Supplied Board Number is not valid
THOR_INVALID_DTMF_NO	// Supplied DTMF Number is not valid

Equivalent LAPI Function

```
dtmfBurstStatus()
```

12.8.2 IOCTL_DTMF_ENABLE

Synopsis

Enables a DTMF Transceiver chip. This function must be called before the DTMF chips are used.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the board hosting the DTMF chips
    short dtmfNo;            // DTMF chip number
    Bool store;              // Determines whether to store all
                            // detected DTMF tones in the FIFO.
} IoctlDtmfEnableT;
```



Output Data Structure

```
ThorRc           // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS      // OK
THOR_INVALID_BOARD_NO // Supplied Board Number is not valid
THOR_INVALID_DTMF_NO // Supplied DTMF Number is not valid
```

Equivalent LAPI Function

```
dtmfEnable()
```

12.8.3 IOCTL_DTMF_RECEIVED

Synopsis

A non-blocking function that either returns the latest detected DTMF tone or THOR_NO_TONE if there was no tone received.

Note that the codec must be properly cross-connected with IOCTL_TSS_XCONNECT prior to calling this function. If there was one or more tones (THOR_SUCCESS), they can be read with the IOCTL_DRV_READ function (like any other message) if the store option is set in the call to IOCTL_DTMF_ENABLE. This function stores the latest DTMF digit that was detected, and it returns that value in the 'dtmfDigit' parameter. It then clears its internally stored digit.

Note also that DTMF chip 0 is always tied to Codec 0, and DTMF chip 1 is always tied to Codec 1.

Input Data Structure

```
typedef struct {
    short boardNo;          // Number of the board hosting the DTMF chips
    short dtmfNo;           // DTMF chip number
} IoctlDtmfT;
```

Output Data Structure

```
typedef struct {
    ThorRc rc;              // Board number.
    char digit;             // Last DTMF digit received (or \0 if none)
} IoctlDtmfReceivedT;
```

Possible Return Codes

```
THOR_SUCCESS           // a DTMF tone was detected
```



```
THOR_DTMF_NO_TONE           // no DTMF tones were detected
THOR_INVALID_BOARD_NO       // Supplied Board Number is not valid
THOR_INVALID_DTMF_NO        // Supplied DTMF Number is not valid
```

Equivalent LAPI Function

dtmfReceived()

12.8.4 IOCTL_DTMF_RESET

Synopsis

Initializes and resets a DTMF chip.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the board hosting the DTMF chips
    short dtmfNo;            // DTMF chip number
} IoctlDtmfT;
```

Output Data Structure

```
ThorRc                  // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS             // OK
THOR_INVALID_BOARD_NO   // Supplied Board Number is not valid
THOR_INVALID_DTMF_NO    // Supplied DTMF Number is not valid
```

Equivalent LAPI Function

dtmfReset()

12.8.5 IOCTL_DTMF_SEND

Synopsis

Sends DTMF tones in a non-burst mode; I.e., the digits are sent with specified tone on and pause intervals.

Input Data Structure

A buffer consisting of the following data:

```
short boardNo           // Number of the Thor-2 board
short dtmfNo            // Number of the DTMF chip
```



```
Word  onTime          // Time in msec to keep the tones on
Word  offTime         // Silence in msec between the tones
Word  noDigits        // no of digits to send
char  digits[noOfDigits]; // digits to be sens
```

Output Data Structure

```
ThorRc                  // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS           // OK
THOR_INVALID_BOARD_NO // Supplied Board Number is not valid
THOR_INVALID_DTMF_NO  // Supplied DTMF Number is not valid
```

Equivalent LAPI Function

```
dtmfSend()
```

See Also

```
IOCTL_DTMF_SEND_BURST
```

12.8.6 IOCTL_DTMF_SEND_BURST

Synopsis

Sends DTMF tones in burst mode. I.e. the tones are send approximately with 51 msec
+- 1 msec tone on and pause intervals.

Input Data Structure

A buffer consisting of the following data:

```
short boardNo           // Number of the Thor-2 board
short dtmfNo            // Number of the DTMF chip
Word  noDigits          // no of digits to send
char  digits[noOfDigits]; // digits to be sens
```

Output Data Structure

```
ThorRc                  // Function Return Code
```

Possible Return Codes

```
THOR_SUCCESS           // OK
THOR_INVALID_BOARD_NO // Supplied Board Number is not valid
THOR_INVALID_DTMF_NO  // Supplied DTMF Number is not valid
```



Equivalent LAPI Function

`dtmfSendBurst()`

See Also

`IOCTL_DTMF_SEND`

12.8.7 IOCTL_DTMF_TONE_OFF

Synopsis

Turns off a constant DTMF tone generation.

Input Data Structure

```
typedef struct {
    short boardNo;           // Number of the board hosting the DTMF chips
    short dtmfNo;            // DTMF chip number
    short digit;             // Digit to be send
} IOCTL_DtmfToneOnT;
```

Output Data Structure

<code>ThorRc</code>	// Function Return Code
---------------------	-------------------------

Possible Return Codes

<code>THOR_SUCCESS</code>	// OK
<code>THOR_INVALID_BOARD_NO</code>	// Supplied Board Number is not valid
<code>THOR_INVALID_DTMF_NO</code>	// Supplied DTMF Number is not valid

Equivalent LAPI Function

`dtmfToneOff()`

See Also

`IOCTL_DTMF_TONE_ON`

12.8.8 IOCTL_DTMF_TONE_ON

Synopsis

Turns on a constant DTMF tone generation.

Input Data Structure

```
typedef struct {
```



```
    short boardNo;           // Number of the board hosting the DTMF chips
    short dtmfNo;            // DTMF chip number
} IOCTL_DtmfEnableT;
```

Output Data Structure

ThorRc // Function Return Code

Possible Return Codes

```
THOR_SUCCESS          // OK
THOR_INVALID_BOARD_NO // Supplied Board Number is not valid
THOR_INVALID_DTMF_NO  // Supplied DTMF Number is not valid
```

Equivalent LAPI Function

dtmfToneOn()

See Also

IOCTL_DTMF_TONE_OFF





13. High-Level API - *thorhapi.h*

13.1 Driver Functions

13.1.1 **thorIdentDriver()**

Synopsis

Returns a pointer to an identification string for the driver. This function is useful in situations where the driver and the applications are not statically linked, and where the application may want to query for the revision or name of a currently dynamically linked driver.

The identification string contains the Odin TeleSystems' product number, the driver revision, and the date the driver was compiled.

Definition

```
char *thorIdentDriver()  
void  
);
```

Returns

Pointer to a string containing the driver identification.

See Also

drvIdent()

13.1.2 **thorConstructDriver()**

Synopsis

Initializes the driver. This function needs to be executed before the high-level driver can be used. The function reads the configuration data from the flash and sets up the sliding memory, the I/O windows, and the clock source. It also checks for the existence of the board, resets the devices on the board, sets the clock source, boots up the LPU, and initializes all the driver data structures.

If a valid IRQ number is provided, the *thorConstructDriver()* function installs the interrupt service routine. If the provided IRQ number is THOR_NO_IRQ (-1), the driver will be set up in a polling mode.



Definition

```

ThorRc thorConstructDriver(
    short boardType,                                // Type of the board used. Boardtype for
                                                    // Thor-2 is 106.
    short boardBaseAddr,                            // I/O-base address configured with a
                                                    // DIP-switch on the board. Base address
                                                    // for Thor boards is valid if:
                                                    // (0x000 < Addr <= 0x400)
                                                    // &&
                                                    // (Addr % 0x10) == 0.
                                                    // Default value is 0x280.
    short noOfBoards,                             // Number of Boards installed (up to 4).
    short irq,                                    // IRQ for all the installed THOR boards
                                                    // (they share the same IRQ), or
                                                    // THOR_NO_IRQ if the polling mode should
                                                    // be used.
    Word infoBufferSize,                          // Size of fifo for board status messages
                                                    // Recommended value: 2048
    Word liHdlcBufferSize,                        // Size of the HDLC fifo in each Li. This
                                                    // fifo is only used if an HDLC pipe
                                                    // is configured for Sa or Si bits (see
                                                    // thorConfigureSaBitPipe() ). If an Sa
                                                    // bit pipe is not used then this size
                                                    // could be set to 0.
    short hostIoOffset[],                         // Table of absolute addresses of the IO
                                                    // windows in the host (e.g. 0x290).
    short hostIoWindowSize[],                     // Table of sizes (no of bytes) of the IO
                                                    // windows in the host (4 <= size <= 1kByte).
                                                    // Most common value would be 16.
    Ulong hostMemoryOffset[],                     // Table of absolute addresses of the
                                                    // memory windows in the host
                                                    // (e.g. 0x0D0000).
    Ulong hostMemoryWindowSize[],                // Table of sizes (no of bytes) of the
                                                    // memory windows in the host
                                                    // (256 <= size <= 16MByte). Typical value
                                                    // would be 16kBytes, 32kBytes, or 64kBytes.
    Byte cpuIrqMask[],                           // Table of interrupt masks. A '1' in
                                                    // the mask will enable the chip interrupt
                                                    // to be forwarded to the CPU.
    Byte lpuIrqMask[],                           // Table of interrupt masks. A '1' in the
                                                    // mask will enable the chip interrupt to
                                                    // be forwarded to the LPU.
    short maxFrameLen[]                          // Maximum frame length (common for
                                                    // all pipes) Indexed per board.

```



) ;

Returns

```
THOR_SUCCESS           // Construction of the Driver successful
THOR_WRONG_CONTEXT    // Driver already constructed
THOR_INVALID_BOARD_TYPE
THOR_INVALID_BOARD_NO
THOR_OUT_OF_MEMORY
THOR_FPGA_NOT_LOADED
THOR_INVALID_ADDRESS
THOR_NO_BOARD          // No board found at the provided I/O address
THOR_INVALID_BOARD_NO
```

See Also

```
thorDestructDriver()
drvInit()
drvSetupMemWin()
drvSetupIoWin()
```

13.1.3 thorDestructDriver()

Synopsis

Releases the driver from memory. This function must be called before the application is exited. Cleans up and clears the driver after use. Uninstalls the Interrupt Service Routines if installed by the *thorConstructDriver()*.

Definition

```
ThorRc thorDestructDriver(
    void
) ;
```

Returns

```
THOR_SUCCESS
THOR_WRONG_CONTEXT      // No driver constructed
```

See Also

```
thorConstructDriver()
```



13.1.4 thorRegisterCallback()

Registers a callback function (implemented by the application) which will be called by the driver upon reception of a message or a hardware/line status change. The use of a callback function allows implementation of event driven applications.

NOTE: Only available with Windows 95 and Windows NT drivers. DOS applications must poll the driver.

Definition

```
ThorRc thorRegisterCallback(
    void (*hapiCallBack)(void)      // function pointer to the callback function in
                                    // the application to be called from the driver
);
```

Returns

THOR_SUCCESS	// OK
THOR_INVALID_CALLBACK_FUNCTION	// Invalid function pointer
THOR_CALLBACK_ALREADY_SET	// Callback function can be set only once
THOR_UNABLE_TO_CREATE_CALLBACK_THREAD	// Creation of a new thread failed

See Also

[drvRegisterCallback\(\)](#)
[IOCTL_START_EVENT_NOTIFICATIONS](#)

13.1.5 thorResetDriver()

Synopsis

The *thorResetDriver()* function resets the driver software. Clears the dynamic data such as the message FIFOs in the host memory.

Definition

```
ThorRc thorResetDriver(
    void
);
```

Returns

THOR_SUCCESS

See Also

[thorResetLi\(\)](#)
[drvResetDriver\(\)](#)



drvResetDevices()

13.1.6 thorSetCpuIntrMask()

Synopsis

The *thorSetCpuIntrMask()* function is used to specify which device (chip) interrupts from the board are forwarded to the host processor to be serviced. The value in parameter *cpuIrqMask* will be written to the CPU Interrupt Mask (CIM) register. The bits in the CIM register are described in Table 7 on page 270. For more information on the Thor-2 internal registers, please refer to the *Thor-2 Technical Description* (Odin TeleSystems Inc. Doc. No. 1112-1-HSA-1002-1).

TABLE 7. CIM Bit Description

Bit	Function
0	0: Mask Interrupts from the HDLC Controller 1: Allow Interrupts
1	0: Mask Interrupts from Li0 1: Allow Interrupts
2	0: Mask Interrupts from Li1 1: Allow Interrupts
3	0: Mask Interrupts from the Time-Space Switch 1: Allow Interrupts
4	0: Mask Interrupts from DTMF Transceiver 0 1: Allow Interrupts
5	0: Mask Interrupts from DTMF Transceiver 1 1: Allow Interrupts
6	0: Mask Interrupts from the LPU 1: Allow Interrupts

Definition

```
ThorRc thorSetCpuIntrMask(
    short boardNo,           // Board number
    short cpuIrqMask        // A '1' in the mask will enable the chip IRQ
                           // to be forwarded to the CPU
);
```

Returns

THOR_SUCCESS



See Also

`thorSetLpuIntrMask()`

13.1.7 `thorSetLpuIntrMask()`

Synopsis

The `thorSetLpuIntrMask()` function is used to specify which device (chip) interrupts from the board are forwarded to the on-board processor (LPU) to be serviced. The value in parameter `lpuIrqMask` will be written to the LPU Interrupt Mask (LIM) register. The bits in the LIM register are described in Table 8 on page 271. For more information on the Thor-2 internal registers, please refer to the *Thor-2 Technical Description* (Odin TeleSystems Inc. Doc. No. 1112-1-HSA-1002-1).

TABLE 8. LIM Bit Description

Bit	Function
0	0: Mask Interrupts from the CPU 1: Allow Interrupts
1	0: Mask Interrupts from the HDLC Controller 1: Allow Interrupts
2	0: Mask Interrupts from Li0 1: Allow Interrupts
3	0: Mask Interrupts from Li1 1: Allow Interrupts
4	0: Mask Interrupts from the Time-Space Switch 1: Allow Interrupts
5	0: Mask Interrupts from DTMF Transceiver 0 1: Allow Interrupts
6	0: Mask Interrupts from DTMF Transceiver 1 1: Allow Interrupts

Definition

```
ThorRc thorSetLpuIntrMask(
    short boardNo,           // Board number
    short lpuIrqMask        // A '1' in the mask will enable the chip IRQ
                            // to be forwarded to the CPU
);
```

Returns

`THOR_SUCCESS`



See Also

`thorSetCpuIntrMask()`



13.2 Line Interface Functions

13.2.1 thorConfigureLi()

Synopsis

The function *thorConfigureLi()* sets up one Line Interface chip in either T1 or E1 mode.

Note: This function uses the configuration parameters specified in the Thor-2 configuration file and stored in the on-board flash for the physical layer configuration.

Definition

```
ThorRc thorConfigureLi(
    short boardNo,           // Board no for the Li chip.
    short liNo,              // Number of the Li chip to be configured.
    LiMode liMode            // Mode to be configured to: T1 or E1
);
```

Returns

```
THOR_SUCCESS
THOR_CONFIG_FAILURE
```

See Also

```
liInitDeviceT1()
liInitDeviceE1()
```

13.2.2 thorGetStatusLi()

Synopsis

The function *thorGetStatusLi()* reports the status of an Line Interface.

Definition

```
ThorRc thorGetStatusLi(
    short boardNo,           // Board number.
    short liNo               // Number of the Line Interface to be read.
);
```

Returns

```
THOR_L1_OK
THOR_L1_DOWN
```



See Also

liGetStatus()

13.2.3 thorSaBytesOn()

Synopsis

The *thorSaBytesOn()* function sets the values to be sent in the SaX bits (X = 4 to 8) . Eight bits (1 byte) for each SaX are specified at the same time (same function call).

In CRC-Multiframe format (16 frames per multi-frame), one bit from each SaX is sent in time-slot 0 in every odd frame (in frames that do not contain frame alignment information). The least significant bit of the saXVal byte is sent in frame 1 of the multiframe and the most significant bit of the Byte is sent in frame 15 of the multiframe (i.e LSb is shifted out first).

In Doubleframe format one bit of each saXVal byte is sent in every frame that does not contain alignment info (every other frame). LSb is shifted out first.

NOTE: Only meaningful in E1 mode

Definition

```
ThorRc thorSaBytesOn(
    short boardNo,           // Board number.
    short liNo,              // Number of the Line Interface to send the service
                            // word from.
    Byte sa4Val,             // Sa4 bits to be sent. LSB will be sent first.
    Byte sa5Val,             // Sa5 bits to be sent. LSB will be sent first.
    Byte sa6Val,             // Sa6 bits to be sent. LSB will be sent first.
    Byte sa7Val,             // Sa7 bits to be sent. LSB will be sent first.
    Byte sa8Val              // Sa8 bits to be sent. LSB will be sent first.
);
```

Returns

THOR_SUCCESS

See Also

thorSaBytesOff()



13.2.4 thorSaBytesOff()

Synopsis

The *thorSaBytesOff()* function returns the Thor-2 board to normal Sa-bit operation. The LIs will stop sending the Sa byte value specified in the *thorSaBytesOn()* function.

NOTE: Only meaningful in E1 mode

Definition

```
ThorRc thorSaBytesOff(
    short boardNo,           // Board number.
    short liNo,              // Number of the Line Interface to stop
                            // sending the service word from.
);
```

Returns

THOR_SUCCESS

See Also

thorSaBytesOff()

13.2.5 thorGetSaBitValue()

Synopsis

The *thorGetSaBitValue()* function fetches the value to of the received SaX bits. Returns a byte (8-bits) received during the last CRC-Multiframe.

NOTE: Only meaningful in E1 mode

Definition

```
ThorRc thorGetSaBitValue(
    short      boardNo,           // Board number.
    short      liNo,              // Line Interface number
    LiSaBit    saBit,             // Sa bit to read
    Byte *saVal                // Last received 8-bits
);
```

Returns

THOR_SUCCESS



See Also

`thorGetSiBitValue()`

13.2.6 thorSetSiBitValue()

Synopsis

The `thorSetSiBitValue()` function sets the value to be sent at the Si bit positions (Spare bits for international use). In Doubleframe format, these are the first bits of each frame. In CRC-Multiframe format, the Si bit are the first bits of frames 13 and 15. In CRC-Multiframe format these bits are also known as the E-bits.

NOTE: Only meaningful in E1 mode

Definition

```
ThorRc thorSetSiBitValue(
    short boardNo,           // Board number.
    short liNo,              // Number of the Line Interface to send the
                            // service word from.
    Byte silVal,             // Value of the FAS Si-bit in doubleframe format
                            // or Si (E) bit in frame 13 in CRC-multiframe
                            // format
    Byte si2Val              // Value of the service word Si bit in DoubleFrame
                            // format or Si (E) bit in frame 15 in
                            // CRC-multiframe format
);
```

Returns

`THOR_SUCCESS`

See Also

`thorGetSiBitValue()`

13.2.7 thorGetSiBitValue()

Synopsis

The `thorGetSiBitValue()` function fetches the value to Si bits received in the last frame.

In Doubleframe format, these are the first bits of each frame. In CRC-Multiframe format, the Si bit are the first bits of frames 13 and 15. In CRC-Multiframe format these bits are also known as the E-bits.

NOTE: Only meaningful in E1 mode



Definition

```
ThorRc thorGetSiBitValue(
    short boardNo,           // Board number.
    short liNo,              // Line Interface number
    Byte *silVal,            // Value of the FAS Si-bit in doubleframe format
                            // or Si (E) bit in frame 13 in CRC-multiframe
                            // format
    Byte *si2Val             // Value of the service word Si bit in
                            // DoubleFrame format
                            // or Si (E) bit in frame 15 in CRC-multiframe format
);
```

Returns

THOR_SUCCESS

See Also

[thorSetSiBitValue\(\)](#)

13.2.8 thorAlarmOn()

Synopsis

The *thorAlarmOn()* function begins transmitting an Alarm towards the Remote End. An Auxiliary Pattern (AUXP) is an unframed signal that contains an continuous alternating bit stream (010101...). The AUXP can be used when Loss of Signal (LOS) has been detected by the receiver. The Alarm Indication Signal (AIS) is an unframed signal that contains an continuous bit stream of 1's. The Remote Alarm Indication (RAI) is send by setting the A-bit (bit 3 in time-slot 0 of E1) to 1.

Note: If both AUXP and AIS is specified, AIS will be send.

Definition

```
ThorRc thorAlarmOn(
    short boardNo,           // Board number.
    short liNo,              // Number of the Line Interface to send the alarm from.
    LiAlarmType alarmType   // Alarm type to send
);
```

Returns

THOR_SUCCESS

See Also

[thorAlarmOff\(\)](#)



13.2.9 thorAlarmOff()

Synopsis

The *thorAlarmOff()* function turns the alarm transmission towards the Remote End off.

Definition

```
ThorRc thorAlarmOff(
    short boardNo,           // Board number.
    short lino,              // Number of the LI to send the alarm from
    LiAlarmType alarmType   // Alarm type to send
);
```

Returns

THOR_SUCCESS

See Also

thorAlarmOn()

13.2.10 thorResetLi()

Synopsis

The function *thorResetLi()* performs a hardware reset on the Line Interface.

Definition

```
ThorRc thorResetLi(
    short lino           // Number of the Line Interface to reset
);
```

Returns

THOR_SUCCESS

See Also

thorResetDriver()
thorResetHdLC()



13.3 Switching

13.3.1 thorConnectChannel()

Synopsis

The *thorConnectChannel()* function connects one channel from an incoming highway in to another channel in an outgoing highway.

Definition

```
ThorRc thorConnectChannel(
    short      boardNo,           // Board number.
    ThorPhwType inHighway,       // Incoming PCM highway.
    short      inChannel,        // The channel in the incoming highway to be
                                // connected to outChannel.
    ThorPhwType outHighway,      // Outgoing PCM highway.
    short      outChannel        // The channel in the outgoing highway to be
                                // connected to inChannel.
);

```

Returns

THOR_SUCCESS

See Also

thorDisconnectChannel()

13.3.2 thorDisconnectChannel()

Synopsis

The *thorDisconnectChannel()* function disconnect channels connected with the *thorConnectChannel()* function.

Definition

```
ThorRc thorDisconnectChannel(
    short boardNo,           // Board number.
    ThorPhwType outHighway, // Outgoing PCM highway.
    short      outChannel   // The channel in the outgoing highway to be
                            // disconnected from whichever inChannel it
                            // is currently connected to)
);

```



Returns

THOR_SUCCESS

See Also

thorConnectChannel()
thorDisconnectAllChannels()

13.3.3 thorDisconnectAllChannels()

Synopsis

The *thorDisconnectAllChannels()* function disconnects all outgoing channels from whichever channels they are connected to (on one Time-Space Switch on one board).

Definition

```
ThorRc thorDisconnectAllChannels(  
    short boardNo           // Board number  
) ;
```

Returns

THOR_SUCCESS

See Also

thorConnectChannel()
thorDisconnectChannel()



13.4 Message Sending and Receiving

13.4.1 thorConfigurePipe()

Synopsis

The function *thorConfigurePipe()* configures a pipe in the HDLC controller. A pipe can contain one time-slot, only certain bits of a time-slot (sub-channel), or several time-slots (super-channel). Each bit that is to be included in the pipe is passed as a bit rate mask. The bit rate mask is an array of 32 bytes, where index 0 is time-slot 0, etc. A '1' in a bit position indicates that the corresponding bit in the time-slot if included in the pipe. A pipe needs to be configured before data or HDLC frames can be received or sent.

Definition

```
ThorRc thorConfigurePipe(
    short boardNo,                      // Board number.
    short pipeNo,                        // Pipe to be configured.
    Byte txBitRateMask[],               // Array of 32 8-bit masks. A '1' indicates
                                         // that this bit of this channel (array
                                         // index) in the THOR_PHW_CTRL highway is
                                         // included in the
                                         // transmit direction of the pipe.
    Byte rxBitRateMask[],               // Bit rate mask for the receive direction
                                         // of the pipe. See txBitRateMask[] above.
    ThorFrameFillType frameFillType // What to send between frames. Either
                                         // flags(0x7E) or all ones (0xFF)
);

```

Returns

THOR_SUCCESS	// Configuration successful
THOR_HDLC_AR_BUSY	// Configuration failed

13.4.2 thorRead()

Synopsis

The function *thorRead()* fetches a received message. Driver will automatically sort the received messages from different pipes according to the time of reception. If several messages are waiting to be fetched, this function will fetch and return the oldest one (messages are buffered in realtime when they arrive, awaiting fetching by this function).



Definition

```
ThorRc thorRead(
    Byte   fmBuf[],           // Buffer into which the received message will
                                // be written. NOTE: The buffer must be
                                // allocated by the application.
    short      fmBufSize,     // Size of fmBuf[].
    ThorFrameHeader *fmHeader // Pointer to header structure that will be
                                // filled in by the function. NOTE: The struct
                                // must be allocated by the application.
);
```

Returns

```
THOR_SUCCESS      // A frame was read successfully
THOR_NO_FRAMES   // No complete frames ready for reading
```

See Also

`thorWritePipe()`

13.4.3 **thorWritePipe()**

Synopsis

The function `thorWritePipe()` sends an HDLC message (including layer 2) on a Pipe.

Definition

```
ThorRc thorWritePipe(
    short      boardNo,       // Board number.
    short      pipeNo,        // The pipe to write to.
    Byte   fmBuf[],           // Buffer containing the message to be sent.
    short      fmLength       // Length of the message to be sent.
);
```

Returns

```
THOR_SUCCESS      // Message accepted and is being sent
THOR_TX_BUSY      // Previous message not yet sent completely
                  // Try again later
THOR_MSG_TOO_LONG // Message is too long to be sent... Try again later
```

See Also

`thorRead()`



13.4.4 thorResetHdlc()

Synopsis

The *thorResetHdlc()* performs a hardware reset on the HDLC controller.

Definition

```
ThorRc thorResetHdlc(  
    short boardNo           // Board number  
) ;
```

Returns

THOR_SUCCESS

See Also

```
thorResetDriver()  
thorResetLi()  
drvInitHdlc()
```



13.5 Phone Functions

13.5.1 thorPhoneOn()

Synopsis

The function *thorPhoneOn()* connects a handset to a specified Codec (CD0 or CD1). The appropriate data channel must have been properly cross-connected on the Time-Space Switch to the Codec prior to calling this function (see *thorConnectChannel()*). Note also that Codec 0 is communicating on channel 2 on the Auxiliary PCM highway. Codec 1 is communicating on channel 3 of the Auxiliary PCM highway.

Definition

```
ThorRc thorPhoneOn(
    short boardNo,           // Board number
    short codecNo,          // Number of the Codec to be used (0 or 1).
    CdLawT law,             // u-law or A-law
    CdCodeT code,            // sign magnitude or CCITT code assignment
                            // (for input/output)
    DtmfOptT dtmfOption     // Determines whether to enable DTMF detection and
                            // if so whether to store all detected DTMF tones
                            // in the FIFO.
);
```

Returns

THOR_SUCCESS

See Also

thorPhoneOff()
thorConnectChannel()

13.5.2 thorPhoneOff()

Synopsis

The function *thorPhoneOff()* disconnects the handset from the codec.

Definition

```
ThorRc thorPhoneOff(
    short boardNo,           // Board number.
    short codecNo,          // Number of the Codec to be used (0 or 1).
);
```



Returns

THOR_SUCCESS

See Also

thorPhoneOn()

13.5.3 thorSendDtmf()

Synopsis

The function *thorSendDtmf()* sends DTMF tones on a B-channel. The time between tones and the duration of the tone can be specified.

Note: The DTMF transceiver is connected to the codec (DTMF chip #0 to Codec chip #0 on aux time-slot #2 and DTMF chip #1 to Codec chip #1 on aux time -slot #3). The codec must be properly cross-connected in the time-space switch to a time-slot in an outgoing T1/E1 span for the tones to be send out.

Definition

```
ThorRc thorSendDtmf(
    short boardNo,           // Board number.
    short codecNo,          // Number of the Codec (0 or 1) to be used.
    char *phoneNumber,       // Phone number to dial.
    DtDurationT duration,   // Burst and pause duration
    CdLawT law,             // u-law or A-law
    CdCodeT code            // sign magnitude or CCITT code
                           // assignment (for input/output)
);
```

Returns

THOR_SUCCESS

13.5.4 thorReceivedDtmf()

Synopsis

The *thorReceivedDtmf()* function is a non-blocking function that either returns the latest detected DTMF tone or THOR_NO_TONE if there was no tone received.

If one or more tones had been detected (THOR_SUCCESS), they can be read with the *thorRead()* function (like any other message) if the dtmfOption is set to DT_DETECT_STORE. If the dtmfOption is set to DT_DETECT_LAST, then the digits will not be stored in the *thorRead()* fifo at all and can only be retrieved with this function.



The function stores the last DTMF digit that was detected, and it returns that value in the 'dtmfDigit' parameter. It then clears its internally stored digit.

Note: The DTMF transceiver is connected to the codec (DTMF chip #0 to Codec chip #0 on aux time-slot #2 and DTMF chip #1 to Codec chip #1 on aux time -slot #3). The codec must be properly cross-connected in the time-space switch to a time-slot in an outgoing T1/E1 span for the tones to be send out.

Definition

```
ThorRc thorReceivedDtmf(  
    short boardNo,           // Board number.  
    short dtmfNo,            // Number of the Dtmf chip (0 or 1) to be used.  
    char *dtmfDigit         // Last DTMF digit received (or \0 if none)  
) ;
```

Returns

THOR_SUCCESS	// a DTMF tone was detected
THOR_NO_TONE	// no tone was detected

See Also

thorSendDtmf()



13.6 Test Functions

13.6.1 thorByteOnBch()

Synopsis

thorByteOnBch() begins sending a constant byte on the specified highway and time-slot and keeps sending it until turned off with the *thorByteOffCh()* function. This constant byte is inserted in every frame for the particular time-slot (channel). The channel byte can have the value between 0 and 255.

Definition

```
ThorRc thorByteOnCh(
    short boardNo,           // Board number
    ThorPhwType outHighway, // PCM Highway to send the byte on.
    short       outChannel, // Channel (0-31) within the PCM highway to send
                           // the byte on.
    Byte      aByte          // Byte to be sent
);
```

Returns

THOR_SUCCESS

See Also

thorByteOffBch()

13.6.2 thorByteOffBch()

Synopsis

The function *thorByteOffBch()* stops the sending of a constant byte value on the specified B-channel.

Definition

```
ThorRc thorByteOffCh(
    short boardNo,           // Board number.
    ThorPhwType outHighway, // PCM Highway to turn off the byte from.
    short       outChannel, // Channel (0-31) within the PCM highway to turn
                           // off the byte from.
);
```



Returns

THOR_SUCCESS

See Also

thorByteOnBch()

13.6.3 thorByteReadBch()

Synopsis

The *thorByteReadBch()* function reads one byte from the specified channel and returns it in **recByte*. The sampling of the byte is done at no particular time. If the byte being read is not constant, random results should be expected. To verify that the channel in fact does carries constant bytes, several samples should be taken.

Definition

```
ThorRc thorByteReadCh(
    short      boardNo,      // Board number.
    ThorPhwType inHighway,   // PCM Highway to read the byte from.
    short      inChannel,   // Channel (0-31) within the PCM highway to
                           // read the byte from.
    Byte       *recByte     // Received byte from the channel.
);
```

Returns

THOR_SUCCESS

Received Byte is returned in **recByte* parameter.

See Also

thorByteOnBch()

thorByteOffBch()



13.7 Miscellaneous

13.7.1 thorGetErrMsg()

Synopsis

The *thorGetErrMsg()* function converts a Thor-function return code into a string. Returns a pointer to a string describing the error code in a general fashion. Can be used for quick and dirty solutions when the return code is not analyzed properly by the application but at least something needs to be printed.

Definition

```
char *thorGetErrMsg(
    ThorRc errCode           // Error code to be converted.
);
```

Returns

Pointer to a static string owned by the function.

See Also

```
drvStatus2Str()
*drvThorRc2Str()
```

13.7.2 thorBoardExistence()

Synopsis

The *thorBoardExistence()* function checks if a Thor-2 board exists at a specified I/O address.

Definition

```
ThorRc thorBoardExistence(
    short boardNo,
    short aIoBaseAddr        // I/O-base address configured with a
                            // DIP-switch on the board. Base address
                            // for Thor boards is valid if:
                            // (0x000 < Addr <= 0x400)
                            // &&
                            // (Addr % 0x10) == 0.
                            // Default value is 0x280.
);
```



Returns

```
THOR_SUCCESS    // if a THOR-2 board was found.  
THOR_NO_BOARD  // if no THOR-2 board was found.
```

See Also

```
drvBoardExistence()  
liExistenceChk()
```

13.7.3 thorLoopLi()

Synopsis

The *thorLoopLi()* function loops the transmit lines of the Line Interface Transceiver to the receive lines.

Definition

```
ThorRc thorLoopLi(  
    short boardNo,           // Board number.  
    short liNo,              // Number of the line interface to be used.  
    LiLoopT loopType        // Line loop or Remote loop  
) ;
```

Returns

```
THOR_SUCCESS
```



**A**

aHostIoOffset 95
 aHostIoWindowSize 95
 aHostMemoryOffset 96
 aHostMemoryWindowSize 96
 aIoBaseAddr 76, 94, 289
 aIrq 85, 94
 AIS 277
 alarmType 102, 277
 A-law 73, 150, 284, 285
 aNoOfBoards 94
 API 16
 Audioapp.exe 14
 AUXP 277

B

binFileName 143
 BOARD_PER_PC 43
 boardBaseAddr 267
 boardType 267
 Byte 42

C

callbackFunction() 27, 35
 cd.h 21, 145
 CD_A_LAW 73
 CD_CCITT_CODE 73
 CD_SIGN_MAGNITUDE_CODE 73
 CD_U_LAW 73
 CDO 284
 CD1 284
 CdCodeT 73, 150, 252, 284, 285
 cdConnectDtmf() 145
 cdConnectHandsetMic() 145
 cdConnectHandsetSpeaker() 146
 cdConnectHandsfreeSpeaker() 146
 cddef.h 21, 73
 cdDigitalGain() 147
 CdDigitalGainT 248
 cdDisconnectHandsetMic() 147
 cdDisconnectHandsetSpeaker() 148
 cdDisconnectHandsfreeSpeaker() 148
 cdFilterGain() 149
 cdInit() 150
 CdLawT 73, 150, 252, 284, 285
 cdMuteOff() 150
 cdMuteOn() 151
 cdReset() 151
 cdSendDtmf() 152
 cdSendDtmf() 152
 cdToneOff() 153
 cdVoiceSideToneOff() 154
 cdVoiceSideToneOn() 154
 cfgData 98
 channelIn 134, 135, 136
 channelOut 131, 134, 135, 136
 CIM 270
 clkMode 112
 code 150, 284, 285
 codecNo 145, 150, 284
 constVal 131, 134



count 91
 cpuIntrMask 77, 78
 cpuIrqMask 270
 CRC-Multiframe 112, 206, 274, 275
 CreateEvent() 32
 CreateFile() 30

D

DATAAPP.EXE 14, 38
 dest 91
 DeviceIoControl() 16
 digits 158
 DM_HIGH_LAYER_CPU 58
 DM_LOW_LAYER_LPU 58
 DM_PARALLEL_CPU 59
 DM_PARALLEL_LPU 59
 DM_STANDALONE 58
 Doubleframe format 112, 207
 driver.h 21, 76
 DRV_END_OF_DRV_STATUS 56
 DRV_FIFO_OVERFLOW 56
 drvBoardExistence() 76
 drvCmpMemBlock() 76
 drvdef.h 21, 58
 drvDisableCpuIntr() 45, 77
 drvDisableLpuIntr() 46, 77
 drvEnableCpuIntr() 45, 78
 drvEnableLpuIntr() 46, 79
 drvFifoLostMsgs() 79
 drvFifoMaxUsage() 80
 drvFifoSize() 81
 drvFifoUsage() 80
 drvFillMem() 81
 drvFpgaStatus() 82
 drvGetBoardStatus() 82
 drvGetStatus() 83
 drvIdent() 83
 drvInit 26
 drvInit() 84
 drvInitHd1c 26
 drvInitHd1c() 84, 119, 123, 220
 drvInstallIIsr() 85
 DrvModeT 58
 drvRead() 27, 47, 86, 88
 drvReadConfigData 26
 drvReadConfigData() 58, 89
 drvReadDriverData() 89
 drvReadEx() 86
 drvReadIo() 90
 drvReadMem() 90
 drvReadMem32() 91
 drvReadMemBlock() 91
 drvReadTma() 87, 88
 drvRegisterCallback() 27, 92
 drvResetDevices 26
 drvResetDevices() 92
 drvResetDriver() 93
 drvResetHd1c() 84
 drvSetClkSrc 26
 drvSetClkSrc() 45, 93
 drvSetup() 94



drvSetupIoWin() 95
 drvSetupMemWin() 95
 drvStatus2Str() 55, 57, 96
 drvThorRc2Str() 54, 97
 drvUnInstallIsr() 97
 drvUnistallIsr 27
 drvWriteConfigData() 58, 98
 drvWriteIo() 99
 drvWriteMem() 99
 drvWriteMem32() 100
 drvWriteMem8() 100
 drvWriteMemBlock() 101
 DT_DETECT_LAST 75, 285
 DT_DETECT_STORE 75, 285
 DT_DISABLE 75
 DT_DURATION_BURST 75
 DT_DURATION_INFINITY 75
 DtDurationT 285
 dtmf.h 21, 156
 dtmfBurstStatus() 156
 dtmfdef.h 21, 75
 dtmfDigit 286
 DtmfDurationT 75
 dtmfEnable() 156
 dtmfEnable() 75
 dtmfNo 286
 dtmfOption 284
 DtmfOptT 75, 284
 dtmfReceived() 157
 dtmfReset() 157
 dtmfSend() 158
 dtmfSendBurst() 158
 dtmfToneOff() 159
 dtmfToneOn() 159
 duration 285
 Dword 42

E

E1APP.EXE 39
 E1app.exe 14
 ENABLE_ECHO_INPUT 32
 ENABLE_LINE_INPUT 32
 errCode 97, 289

F

FILE_ATTRIBUTE_NORMAL 30
 flash.h 21, 141
 FLASH_BASE_ADDR 71
 FLASH_BOOT_ADDR 71
 FLASH_RESET_ADDR 71
 FLASH_SA 71
 FLASH_TOP_ADDR 71
 flashdef.h 21, 71
 FLSH_MAX_SECT_NO 71
 FLSH_MAX_USR_SECT_NO 71
 flshCheckSectorUsage() 141
 flshCheckUsage() 141
 flshEraseSector() 142
 flshLoadData() 142
 flshLoadPrg() 143
 flshReadMaintSect() 143



flshWriteMem() 144
 fmBuf 174
 fmBufSize 86, 174, 176, 282
 fmHeader 86, 282
 fmLength 46
 fmSeqNo 46
 fmSrc 46
 fmStatus 46
 fmType 46
 frameFillType 281

G

GetConsoleMode() 32
 GetStdHandle() 27, 32, 35

H

HANDLE 31
 HAPIAPP.EXE 14, 38
 hdlc.h 21, 115
 HDLC_ARF_INTR 56
 HDLC_CHANNELS_MAX 66, 173
 HDLC_ERR_RX_INTR 56
 HDLC_ERR_TX_INTR 56
 HDLC_FO_INTR 56
 HDLC_FRAME_LENGTH_MAX 66, 174, 177, 212
 HDLC_HI_RX_INTR 56
 HDLC_HI_TX_INTR 56
 HDLC_HOLD_FAILED 56
 HDLC_IFC_INTR 56
 HDLC_INVALID_LEN 56
 HDLC_INVALID_PIPE_INTR 56
 HDLC_ITF_INTR 56
 HDLC_NO_PATTERNS_MAX 66
 HDLC_OVERFLOW_INTR 56
 HDLC_SF_ERR_INTR 56
 HDLC_SF1_INTR 56
 HDLC_SF2_INTR 56
 HDLC_TIMESLOTS_MAX 66
 HDLC_UNKNOWN_INTR 56
 HdlcBufAllocT 69, 84, 173
 HdlcDataPatternT 69, 117, 213
 hdlcdef.h 21, 66
 hdlcInitPipe 27
 hdlcInitPipe() 115
 hdlcInitPipe() 126, 223
 hdlcMemoryAlloc() 119
 hdlcMemoryCheckId() 122
 hdlcMemoryCheckUsage() 122
 hdlcMemoryFree() 120
 hdlcMemoryGetSendStatus() 125
 hdlcMemoryRead() 121
 hdlcMemorySendData() 124
 hdlcMemorySendDataList() 124
 hdlcMemoryStartIdlePattern() 123
 hdlcMemoryWrite() 120
 HdlcPipeOpts 66, 115, 210
 hdlcReceiveOff() 118
 hdlcReceiveOn() 118
 hdlcSendAbort() 115
 hdlcSendData() 116
 hdlcSendData() 28



hdlcSendPattern() 117
hdlcSS7GetFilter() 128
hdlcSS7GetReceiveStatus() 127
hdlcSS7GetSendStatus() 126
hdlcSS7SendData() 129
hdlcSS7SendDataEx() 129
hdlcSS7SetFilter() 128
hdlcSS7SetFisu() 126

I

inChannel 279, 288
infoBufferSize 94, 267
inHighway 279, 288
INVALID_HANDLE_VALUE 30
IOCTL 202
IOCTL_CD_CONNECT_DTMF 246
IOCTL_CD_CONNECT_HANDSET_MIC 246
IOCTL_CD_CONNECT_HANDSET_SPEAKER 247
IOCTL_CD_CONNECT_HANDSFREE_SPEAKER 248
IOCTL_CD_DIGITAL_GAIN 248
IOCTL_CD_DISCONNECT_HANDSET_MIC 249
IOCTL_CD_DISCONNECT_HANDSET_SPEAKER 250
IOCTL_CD_DISCONNECT_HANDSFREE_SPEAKER 251
IOCTL_CD_FILTER_GAIN 251
IOCTL_CD_INIT 252
IOCTL_CD_MUTE_OFF 253
IOCTL_CD_MUTE_ON 253
IOCTL_CD_RESET 254
IOCTL_CD_SEND_DTMF 255
IOCTL_CD_VOICE_SIDE_TONE_OFF 255, 257
IOCTL_CD_VOICE_SIDE_TONE_ON 256, 258
IOCTL_DRV_BOARD_EXISTENCE 162
IOCTL_DRV_CMP_MEM_BLOCK 162, 163
IOCTL_DRV_DISABLE_CPU_INTR 164
IOCTL_DRV_DISABLE_LPU_INTR 165
IOCTL_DRV_ENABLE_CPU_INTR 166
IOCTL_DRV_ENABLE_LPU_INTR 166
IOCTL_DRV_ERROR_2_STR 167
IOCTL_DRV_FIFO_MAX_USAGE 168
IOCTL_DRV_FILL_MEM 168, 169, 170
IOCTL_DRV_IDENT 30, 172
IOCTL_DRV_INIT 172
IOCTL_DRV_INIT_HDLC 31, 173, 215
IOCTL_DRV_READ 32, 47, 174, 175
IOCTL_DRV_READ_CONFIG_DATA 58, 177
IOCTL_DRV_READ_IO 178
IOCTL_DRV_READ_MEM 178
IOCTL_DRV_READ_MEM_BLOCK 180
IOCTL_DRV_READ_MEM32 179
IOCTL_DRV_READ_SERIAL_NO 176
IOCTL_DRV_READ_TMA 176
IOCTL_DRV_RESET_DEVICES 180
IOCTL_DRV_RESET_DRIVER 181
IOCTL_DRV_RESET_HDLC 181
IOCTL_DRV_RETURN_STR_LEN_MAX 187
IOCTL_DRV_SET_CLK_SRC 31, 45, 182
IOCTL_DRV_SETUP 183
IOCTL_DRV_SETUP_IO_WIN 183
IOCTL_DRV_SETUP_MEM_WIN 184
IOCTL_DRV_START_EVENT_NOTIFICATIONS 185
IOCTL_DRV_STATUS_2_STR 57, 186



IOCTL_DRV_STOP_EVENT_NOTIFICATIONS 186
IOCTL_DRV_THOR_RC_2_STR 54, 187
IOCTL_DRV_VXD_REG_VALUES 188
IOCTL_DRV_VXD_STATUS 30, 189
IOCTL_DRV_WRITE_CONFIG_DATA 58, 189
IOCTL_DRV_WRITE_IO 190
IOCTL_DRV_WRITE_MEM 191
IOCTL_DRV_WRITE_MEM_BLOCK 193
IOCTL_DRV_WRITE_MEM32 192
IOCTL_DRV_WRITE_MEM8 191
IOCTL_DTMF_BURST_STATUS 259
IOCTL_DTMF_ENABLE 75, 259
IOCTL_DTMF_RECEIVED 260
IOCTL_DTMF_RESET 261
IOCTL_DTMF_SEND 261
IOCTL_DTMF_SEND_BURST 262
IOCTL_DTMF_TONE_OFF 263
IOCTL_DTMF_TONE_ON 263
IOCTL_FLASH_CHECK_SECTOR_USAGE 241
IOCTL_FLASH_CHECK_USAGE 241
IOCTL_FLSH_ERASE_SECTOR 242
IOCTL_FLSH_LOAD_DATA 243
IOCTL_FLSH_READ_MAINT_DATA 243
IOCTL_FLSH_WRITE_MEM 244
IOCTL_FPGA_STATUS 171
IOCTL_HDLC_INIT_PIPE 31, 210
IOCTL_HDLC_MEMORY_ALLOC 215
IOCTL_HDLC_MEMORY_CHECK_ID 218
IOCTL_HDLC_MEMORY_CHECK_USAGE 219
IOCTL_HDLC_MEMORY_FREE 216
IOCTL_HDLC_MEMORY_GET_SEND_STATUS 223
IOCTL_HDLC_MEMORY_READ 217
IOCTL_HDLC_MEMORY_SEND_DATA 221
IOCTL_HDLC_MEMORY_SEND_DATA_LIST 222
IOCTL_HDLC_MEMORY_START_IDLE_PATTERN 220
IOCTL_HDLC_MEMORY_WRITE 216
IOCTL_HDLC_RECEIVE_OFF 213
IOCTL_HDLC_RECEIVE_ON 214
IOCTL_HDLC_SEND_ABORT 210
IOCTL_HDLC_SEND_DATA 33, 211
IOCTL_HDLC_SEND_PATTERN 212
IOCTL_HDLC_SS7_GET_FILTER 226
IOCTL_HDLC_SS7_GET_RECEIVE_STATUS 225
IOCTL_HDLC_SS7_GET_SEND_STATUS 224
IOCTL_HDLC_SS7_SEND_DATA 227, 228
IOCTL_HDLC_SS7_SET_FILTER 226
IOCTL_HDLC_SS7_SET_FISU 223
IOCTL_LI_ALARM_OFF 194
IOCTL_LI_ALARM_ON 194
IOCTL_LI_BIT_ROB_ACCESS_DISABLE 195
IOCTL_LI_BIT_ROB_ACCESS_ENABLE 196
IOCTL_LI_CONFIGURE 31, 197
IOCTL_LI_EXISTENCE_CHK 198
IOCTL_LI_FORCE_RESYNCH 199
IOCTL_LI_GET_BIT_ROB_DATA 200
IOCTL_LI_GET_SA_BIT_VALUE 200
IOCTL_LI_GET_SI_BIT_VALUE 201
IOCTL_LI_GET_STATUS 202
IOCTL_LI_LOOP 203
IOCTL_LI_SA_BIT_ACCESS_DISABLE 203
IOCTL_LI_SA_BIT_ACCESS_ENABLE 204



IOCTL_LI_SET_BIT_ROB_DATA 205
IOCTL_LI_SET_CLK_MODE 206
IOCTL_LI_SET_SA_BIT_VALUE 206
IOCTL_LI_SET_SI_BIT_VALUE 207, 208
IOCTL_LPU_BOOT 238
IOCTL_LPU_FLOAT 238
IOCTL_LPU_GET_STATUS 239
IOCTL_LPU_INSTALL_ISR 239
IOCTL_LPU_INTR 240
IOCTL_TSS_CLEAR 230
IOCTL_TSS_CONST_BYTE 44, 230
IOCTL_TSS_DISABLE 231
IOCTL_TSS_ENABLE 232
IOCTL_TSS_INIT 232
IOCTL_TSS_LI_XCONNECT 234
IOCTL_TSS_READ_DATA_MEMORY 235
IOCTL_TSS_TIMING_MODE 235
IOCTL_TSS_XCONNECT 31, 44, 233, 236
IoctlCdDigitalGainT 249
IoctlCdFilterGainT 252
IoctlCdInitT 252
IoctlCdSendDtmfT 255, 256
IoctlCdT 246
IoctlDrvBoardExistenceT 162
IoctlDrvFillIMemT 170
IoctlDrvInitHdlcReturnT 173
IoctlDrvInitHdlcT 30, 173
IoctlDrvIntrT 164, 165, 167
IoctlDrvMemBlockT 180
IoctlDrvReadConfigDataReturnT 31, 177
IoctlDrvReadIoReturnT 178
IoctlDrvReadIoT 178
IoctlDrvReadMem32ReturnT 179
IoctlDrvReadMemReturnT 179
IoctlDrvReadMemT 178, 179
IoctlDrvReadReturnT 32, 174, 177
IoctlDrvSetClkSrcT 31, 182
IoctlDrvSetupIoWinT 184
IoctlDrvSetupMemWinT 185
IoctlDrvSetupT 183
IoctlDrvStatus2StrT 187
IoctlDrvStringReturnT 30, 172, 187, 188
IoctlDrvVxDRegValuesReturnT 188
IoctlDrvVxDStatusReturnT 30, 189
IoctlDrvWriteConfigDataT 190
IoctlDrvWriteIoT 190
IoctlDrvWriteMem32T 192
IoctlDrvWriteMem8T 192
IoctlDrvWriteMemT 191
IoctlDtmfEnableT 259
IoctlDtmfReceivedT 260
IoctlDtmfT 259
IoctlDtmfToneOnT 263
IoctlFlshReadMaintSectReturnT 244
IoctlFlshSectorT 241, 242
IoctlFlshUsageReturnT 241, 242
IoctlFlshWriteMemT 244
IoctlHdlcInitPipeT 31, 210
IoctlHdlcSendDataT 33, 212
IoctlHdlcSendPatternT 213
IoctlLiAlarmT 194, 195



IocLiBitRobDataT 205
 IocLiConfigureT 31, 197
 IocLiGetSaBitValueReturnT 201
 IocLiGetSaBitValueT 201
 IocLiGetSiBitValueReturnT 202
 IocLiLoopT 203
 IocLiSetClkModeT 206
 IocLiSetSaBitValueT 207
 IocLiSetSiBitValueT 208
 IocLiT 195
 IocLpuBootT 238
 IocLpuGetStatusReturnT 239
 IocTssConstByteT 231, 233
 IocTssReadDataMemoryReturnT 235
 IocTssReadDataMemoryT 235
 IocTssTimingModeT 236
 IocTssXConnectT 31, 234, 236
 irq 267

L

LAPIAPP.EXE 14, 38
 law 150, 284, 285
 li.h 21, 102
 LI_AIS 60
 LI_ALARM_SIMULATION 60
 LI_AUXP 60
 LI_RAI 60
 liAlarmOff() 102
 liAlarmOn() 102
 LiAlarmType 60, 102, 194, 195, 277
 liBitRobAccessDisable() 103
 liBitRobAccessEnable() 103
 LiBrData 111
 LiClkMode 61
 LiClkMode 112
 LiConfigOptionsT 62, 105, 197
 liConfigure 26
 liConfigure() 104
 lidef.h 21, 60
 LiE1ConfigOptionsT 62, 64
 liExistenceChk() 106
 liForceResynch() 106
 liGetSaBitValue() 107
 liGetSiBitValue() 108
 liGetStatus() 109
 liHdLCBufferSize 267
 liLoop() 109
 LiLoopT 109, 203, 290
 LIM 271
 LiMode 60, 273
 liMode 273
 LIS_CASE 55
 LIS_ACTIVE 56
 LIS_AIS 55
 LIS_AIS16_55
 LIS_API_56
 LIS_CASC_RSC 55
 LIS_CRC4_CRC6 55
 LIS_DEACTIVE 56
 LIS_FAR 55
 LIS_LFA 55



LIS_LMFA16_XSLP 55
 LIS_LOS 55
 LIS_MFAR 55
 LIS_RA 55
 LIS_RA16_LLWSC 56
 LIS_RAR 55
 LIS_RDO 55
 LIS_SLN 56
 LIS_SLP 56
 LIS_T400MS_LMFA 55
 LIS_T8MS_ISF 55
 LIS_XDU 55
 LIS_XLO 56
 LIS_XLS 56
 LIS_XLSC 55
 LIS_XPR 56
 LiSaBit 108, 113, 207, 275
 liSaBitAccessDisable() 110
 liSaBitAccessEnable() 110
 liSetBitRobData() 111
 liSetBitRobData() 61
 liSetClkMode() 112
 liSetSaBitValue() 112
 liSetSiBitValue() 113
 liTransmitPinControl() 114
 loopType 109, 290
 LOS 277
 lpu.h 21, 138
 LPU_APP_WATCHDOG 57
 LPU_DOS_WATCHDOG 56
 LPU_HW_WATCHDOG 56
 lpuBoot() 138
 LpuBootCondT 238
 lpudef.h 21
 lpuFloat() 138
 lpuGetStatus() 139
 lpuInstallIsr() 139
 lpuIntr() 139
 lpuIntrMask 78, 79
 lpuIrqMask 271
 lpuLoadApp() 140
 LpuStatusT 139, 239

M

MaintDataT 71, 244
 maxFrameLen 119, 123, 215, 220
 MVIP-90 136, 235

N

noOfBoards 267

O

offTime 158
 onTime 158
 OPEN_EXISTING 30
 otsdef.h 21, 42
 outChannel 279, 287
 outHighway 279, 287

P

PATAPP.EXE 39



Patapp.exe 14
 pcmHwIn 134, 135, 136
 pcmHwOut 131, 134, 136
 PERFAPP.EXE 39
 Perfapp.exe 14
 PHONEAPP.EXE 39
 Phoneapp.exe 14
 phoneNumber 285
 pipeNo 281

R

RAI 277
 ReadFile() 27, 32, 35
 Readme 14
 rxBufAlloc 173

S

sa4Val 274
 saBit 113
 SAPIAPP.EXE 38
 Sapiapp.exe 14
 SDA-1001-1 12
 sectNo 142
 SetConsoleMode() 32
 si1Val 113, 276, 277
 si2Val 113, 276, 277
 SS7app.exe 14
 Statusapp.exe 14

T

T1APP.EXE 39
 T1app.exe 14
 T2.cfg 13
 T2boot.exe 13
 T2Config.exe 24
 T2config.exe 13
 T2ConfigW 13
 T2ConfigW.exe 13, 24
 t2vxddef.h 162
 targetBaseAddress 143
 Tho2.lib 12
 THOR 45
 THOR_ASSERT_FAILED 52
 THOR_AUX_CD0_CH 43
 THOR_AUX_CD1_CH 43
 THOR_BAD_BOOT_VECTOR 53, 138, 238
 THOR_BAD_CHIP 51
 THOR_BOARD_TYPE 43
 THOR_CALLBACK_ALREADY_SET 54
 THOR_CD_COMM_FAILURE 52, 145, 246
 THOR_CD_INVALID_CODE 54, 150, 252
 THOR_CD_INVALID_LAW 54, 150, 252
 THOR_CD_INVALID_RX_GAIN 54, 149, 252
 THOR_CD_INVALID_TX_GAIN 54, 149, 252
 THOR_CD_PER_BOARD 43
 THOR_CIM_DT0 45
 THOR_CIM_DT1 45
 THOR_CIM_FA0 45
 THOR_CIM_FA1 45
 THOR_CIM_FMI 45
 THOR_CIM_LPU 45



THOR_CIM_MUN 45
THOR_CLK_EXTERNAL_2M 45
THOR_CLK_EXTERNAL_8K 45
THOR_CLK_FA0 45
THOR_CLK_FA1 45
THOR_CLK_INTERNAL 44
THOR_CLK_MVIP_MASTER_CLK 44
THOR_CLK_MVIP_SEC_CLK 45
THOR_CONFIG_FAILURE 273
THOR_CORRUPT_FPGA_FILE 51
THOR_DATA_ID_FREE 54
THOR_DATA_ID_IN_USE 54
THOR_DATA_TOO_LARGE 53, 91, 125, 171, 187, 188, 193, 222
THOR_DEVICE_OPEN_FAILED 52, 84, 173
THOR_DEVICE_READ_FAILED 52
THOR_DRV_CALL_FAILED 52
THOR_DRV_NOT_INITIALIZED 52
THOR_DTMF_BUSY 53, 156, 259
THOR_DTMF_NO_TONE 52, 157, 261
THOR_DTMF_PER_BOARD 43
THOR_E1 60
THOR_EXTMEM_MOVE_FAILED 54
THOR_FEC_CRC0 49
THOR_FEC_LFD 49
THOR_FEC_LOSS 49
THOR_FEC_NOB 49
THOR_FEC_OK 49
THOR_FEC_OVERFLOW 49
THOR_FEC_RA 49
THOR_FEC_ROF 49
THOR_FEC_SF 49
THOR_FFT_ALL_ONES 50
THOR_FFT_FLAGS 50
THOR_FILE_NOT_FOUND 52
THOR_FLASH_BAD_ADDR 52, 143, 144, 243, 245
THOR_FLASH_BAD_ADDRESS 143
THOR_FLASH_BAD_FILE 52, 143
THOR_FLASH_CONFIG_ERR 51, 98, 190
THOR_FLASH_ERASE_ERR 52, 98, 190
THOR_FLASH_INVALID_SECT_NO 52, 141, 142
THOR_FLASH_PRG_FAIL 52, 142, 143, 144, 243, 245
THOR_FLASH_TOO_LARGE 52
THOR_FLASH_WRITE_ERR 52, 98, 190
THOR_FM_DTMF 48
THOR_FM_HDLC 48
THOR_FM_SS7_FISU 48
THOR_FM_STAT 48
THOR_FPGA_FILE_NOT_FOUND 52
THOR_FPGA_NOT_LOADED 52, 82, 171, 268
THOR_HDLC_AR_BUSY 52, 115, 116, 210, 214, 281
THOR_HDLC_INIT_FAILURE 52, 85, 173
THOR_HDLC_INVALID_PIPE_NO 54, 115, 210, 211
THOR_HDLC_INVALID_RX_STATE 52, 118, 214
THOR_HDLC_INVALID_STATE_TRANS 116, 117, 211, 212, 213, 214
THOR_HDLC_INVALID_TX_STATE 52, 117, 212
THOR_HDLC_MSG_TOO_LONG 117, 212, 213
THOR_HDLC_NO_DATA 54, 121, 218
THOR_INVALID_ADDR 51, 76, 162, 183
THOR_INVALID_ADDRESS 268
THOR_INVALID_ALARM_TYPE 102, 103, 194, 195
THOR_INVALID_BOARD_NO 51, 76, 183, 184, 268



THOR_INVALID_BOARD_TYPE 51, 268
 THOR_INVALID_CALLBACK_FUNCTION 54
 THOR_INVALID_CODEC_NO 52, 145, 246
 THOR_INVALID_DIGIT 54
 THOR_INVALID_DTMF_NO 54, 156, 259
 THOR_INVALID_HOST_IO_OFFSET 53, 95, 184
 THOR_INVALID_HOST_MEM_OFFSET 53, 96, 185
 THOR_INVALID_IO_WIN_SIZE 53
 THOR_INVALID_IO_WINDOW_SIZE 95, 184
 THOR_INVALID_IRQ_NO 51, 85, 183
 THOR_INVALID_LI_NO 51, 102, 194
 THOR_INVALID_MEM_WIN_SIZE 53
 THOR_INVALID_MEM_WINDOW_SIZE 96, 185
 THOR_INVALID_RETURN_CODE 53, 188
 THOR_INVALID_STATE_TRANS 52
 THOR_L1_DOWN 51, 109, 202, 273
 THOR_L1_OK 51, 109, 202, 273
 THOR_LI_INIT_FAILURE 52
 THOR_LI_INVALID_AIS_DETECTION_OPTION 53, 105, 198
 THOR_LI_INVALID_ALARM_TYPE 53
 THOR_LI_INVALID_CLOCK_MODE 53, 105, 112, 197, 206
 THOR_LI_INVALID_FRAME_FORMAT 53, 105, 198
 THOR_LI_INVALID_HDB3_ERROR_OPTION 53, 105, 198
 THOR_LI_INVALID_LOOP_TYPE 54, 110, 203
 THOR_LI_INVALID_MODE 54, 105, 197
 THOR_LI_INVALID_RECEIVE_EQUALIZER_OPTION 53, 105, 198
 THOR_LI_INVALID_RECEIVE_FRAME_FORMAT 53, 105, 198
 THOR_LI_INVALID_RECEIVE_LINE_CODE 53, 105, 197
 THOR_LI_INVALID_RECEIVE_REMOTE_ALARM_FORMAT 54, 105, 198
 THOR_LI_INVALID_REGAIN_MULTI_FRAME_OPTION 53, 105, 198
 THOR_LI_INVALID_REMOTE_ALARM_OPTION 53, 105, 198
 THOR_LI_INVALID_RESYNC_OPTION 53, 105, 197
 THOR_LI_INVALID_SIGNALING_MODE 53, 105, 198
 THOR_LI_INVALID_TRANSMIT_FRAME_FORMAT 53, 105, 198
 THOR_LI_INVALID_TRANSMIT_LINE_CODE 53, 105, 197
 THOR_LI_INVALID_TRANSMIT_POWER_OPTION 53, 105, 198
 THOR_LI_INVALID_TRANSMIT_REMOTE_ALARM_FORMAT 54, 105, 198
 THOR_LI_PER_BOARD 43
 THOR_LIM_CPU 46
 THOR_LIM_DT0 46
 THOR_LIM_DT1 46
 THOR_LIM_FA0 46
 THOR_LIM_FA1 46
 THOR_LIM_FMI 46
 THOR_LIM_MUN 46
 THOR_LPU_BOOT_FAILED 53, 138, 238
 THOR_MSG_TOO_LONG 52, 282
 THOR_NO_BOARD 51, 76, 162, 173, 268, 290
 THOR_NO_CASE_INTR 52
 THOR_NO_DATA 120, 216
 THOR_NO_FFT 50
 THOR_NO_FRAMES 27, 35, 51, 86, 87, 88, 174, 175, 177, 282
 THOR_NO_IMODE 60
 THOR_NO_IO_WIN 53
 THOR_NO_MAINT_AUTHORIZATION 53
 THOR_NO_MEM_WIN 53, 85, 138, 141, 173, 238, 241, 242
 THOR_NO_OF_HIGHWAY_CHANNELS 43
 THOR_NO_TONE 286
 THOR_NON_DEFAULT_LI 52, 106, 199
 THOR_NOT_SETUP 51, 104, 111, 197, 205
 THOR_OUT_OF_MEMORY 52, 84, 85, 119, 124, 173, 215, 221, 268



THOR_PHW_AUX 44
 THOR_PHW_CTRL 44
 THOR_PHW_LI0 44
 THOR_PHW_LI1 44
 THOR_PHW_MVIP0 44
 THOR_PHW_UNDEF 44
 THOR_PIPE_NO_MEM 54
 THOR_PIPE_NOT_CONFIGURED 52
 THOR_SETUP_INCOMPLETE 54
 THOR_SIZE_TOO_LARGE 54, 121, 217
 THOR_SRC_CD0 47
 THOR_SRC_CD1 47
 THOR_SRC_CTL 47
 THOR_SRC_DRV 47
 THOR_SRC_DT0 47
 THOR_SRC_DT1 47
 THOR_SRC_LI0 47
 THOR_SRC_LI1 47
 THOR_SRC_LPU 47
 THOR_SRC_PIPE0 47
 THOR_SRC_TSS 47
 THOR_SUCCESS 22, 34, 51
 THOR_T1 60
 THOR_TIMEOUT 51
 THOR_TOO_MANY_PIPES 52, 115, 210
 THOR_TSS_INVALID_CHANNEL 52, 132, 134, 135, 137, 230, 231, 233, 235
 THOR_TSS_INVALID_PCM_HW 52, 131, 134, 135, 136, 230, 231, 233, 235
 THOR_TSS_INVALID_TIMING_MODE 52, 94, 136, 182, 236
 THOR_TX_BUSY 51, 111, 116, 117, 124, 125, 205, 212, 213, 221, 223, 282
 THOR_TX_IDLE 54, 125, 223
 THOR_UNABLE_TO_CREATE_CALLBACK_THREAD 54
 THOR_UNDEFINED 23, 51
 THOR_WRONG_CONFIG_VER 52, 89, 177
 THOR_WRONG_CONTEXT 52, 102, 103, 104, 108, 111, 194, 195, 196, 197, 200, 201, 202, 268
 THOR_WRONG_PIPE_MODE 54
 Thor2.vxd 15
 thorAlarmOff() 278
 thorAlarmOn() 277
 thorBoardExistence() 289
 thorByteOffBch() 287
 thorByteOnBch() 287
 thorByteReadBch() 288
 ThorClkSrcType 44
 ThorConfigT 58, 89, 98, 177, 190
 thorConfigureLi() 34, 273
 thorConfigurePipe() 34, 281
 thorConnectChannel() 34, 279
 thorConstructDriver() 266
 thorConstructDriver() 34
 thordef.h 21, 43
 thorDestructDriver() 268
 thorDestructDriver() 35
 thorDisconnectAllChannels() 280
 thorDisconnectChannel() 279
 ThorDriverT 50, 89
 ThorFrameFillType 50, 281
 ThorFrameHeader 46, 86, 88, 174, 177, 282
 ThorFrameType 48
 thorGetErrMsg 23
 thorGetErrMsg() 54, 289
 thorGetSaBitValue() 275



thorGetSiBitValue() 276
 thorGetStatusLi() 273
 thorhapi.h 20, 266
 thorIdentDriver() 266
 thorLoopLi() 290
 thorPhoneOff() 284
 thorPhoneOn() 284
 ThorPhwType 44, 230, 233, 234, 235, 236, 279, 287, 288
 ThorRc 34, 54
 thorRead() 35, 47, 281
 thorReceivedDtmf() 285
 thorRegisterCallback() 34, 269
 thorResetDriver() 269
 thorResetHdlc() 283
 thorResetLi() 278
 thorSaBytesOff() 275
 thorSaBytesOn() 274
 thorsapi.h 21
 thorSendDtmf() 285
 thorSetCpuIntrMask() 270
 thorSetLpuIntrMask() 271
 thorSetSiBitValue() 276
 ThorSrcType 47
 ThorStatusType 55, 187
 thorWritePipe() 35, 282
 tss.h 21, 131
 tssClear() 131
 tssConstByte() 131, 133
 tssConstByte() 44
 tssdef.h 21
 tssDisable() 132
 tssEnable() 132
 tssInit() 133
 tssReadDataMemory() 135
 tssTimingMode() 136
 tssXConnect 27
 tssXConnect() 134, 136
 tssXConnect() 44
 txBufAlloc 173

U

Uchar 42
 Uint 42
 u-law 73, 150, 284, 285
 Ulong 42
 Ushort 42

V

Visual C++ 4 12

W

WAIT_OBJECT_0 32
 WAIT_TIMEOUT 32
 WaitForMultipleObjects() 32
 WaitForSingleObject() 27, 35
 Word 42

Doc. No. 1211-1-SDA-1003
For more information on this product, please contact:

Odin TeleSystems Inc.
800 E. Campbell Road, Suite 300
Richardson, Texas 75081-1873
U. S. A.

Tel: +1-972-664-0100
Fax: +1-972-664-0855
Email: Info@OdinTS.com
URL: <http://www.OdinTS.com/>

Copyright (C) Odin TeleSystems Inc., 1996 - 2000